DATA SHEET

74ALVT16600

2.5V/3.3V 18-bit universal bus transceiver (3-State)

Product specification
Replaces data of 1997 May 12
IC23 Data Handbook

1998 Feb 13

Philips
Semiconductors

PHILIPS

2.5V/3.3V 18-bit universal bus transceiver (3-State) 74ALVT16600

FEATURES

- 18-bit bidirectional bus interface
- 5V I/O Compatible
- 3-State buffers
- Output capability: +64mA/-32mA
- TTL input and output switching levels
- Input and output interface capability to systems at 5V supply
- Bus-hold data inputs eliminate the need for external pull-up resistors to hold unused inputs
- Live insertion/extraction permitted
- Power-up reset
- Power-up 3-State
- No bus current loading when output is tied to 5V bus
- Negative edge-triggered clock inputs
- Latch-up protection exceeds 500mA per JEDEC JC40.2 Std 17
- ESD protection exceeds 2000V per MIL STD 883 Method 3015 and 200V per Machine Model

DESCRIPTION

The 74ALVT16600 is a high-performance BiCMOS product designed for V_{CC} operation at 2.5V and 3.3V with I/O compatibility up to 5V.

This device is an 18-bit universal transceiver featuring non-inverting 3-State bus compatible outputs in both send and receive directions. Data flow in each direction is controlled by output enable ($\overline{OEAB}$ and $\overline{OEBA}$), latch enable (LEAB and LEBA), and clock ($\overline{CPAB}$ and $\overline{CPBA}$) inputs. For A-to-B data flow, the device operates in the transparent mode when LEAB is High. When LEAB is Low, the A data is latched if $\overline{CPAB}$ is held at a High or Low logic level. If LEAB is Low, the A-bus data is stored in the latch/flip-flop on the High-to-Low transition of $\overline{CPAB}$. When $\overline{OEAB}$ is Low, the outputs are active. When $\overline{OEAB}$ is High, the outputs are in the high-impedance state. The High clock can be controlled with the clock-enable inputs ($\overline{CEBA}$/$\overline{CEAB}$).

Data flow for B-to-A is similar to that of A-to-B but uses $\overline{OEBA}$, LEBA and $\overline{CPBA}$.

Active bus-hold circuitry is provided to hold unused or floating data inputs at a valid logic level.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS T_{amb} = 25°C	TYPICAL		UNIT
			2.5V	3.3V	
t_{PLH} t_{PHL}	Propagation delay An to Bn or Bn to An	C_L = 50pF	1.9 2.5	1.6 1.9	ns
C_{IN}	Input capacitance DIR, $\overline{OE}$	V_I = 0V or V_{CC}	4	4	pF
$C_{I/O}$	I/O pin capacitance	Outputs disabled; $V_{I/O}$ = 0V or V_{CC}	8	8	pF
I_{CCZ}	Total supply current	Outputs disabled	40	70	µA

ORDERING INFORMATION

PACKAGES	TEMPERATURE RANGE	OUTSIDE NORTH AMERICA	NORTH AMERICA	DWG NUMBER
56-Pin Plastic SSOP Type III	–40°C to +85°C	74ALVT16600 DL	AV16600 DL	SOT371-1
56-Pin Plastic TSSOP Type II	–40°C to +85°C	74ALVT16600 DGG	AV16600 DGG	SOT364-1

PIN DESCRIPTION

PIN NUMBER	SYMBOL	NAME AND FUNCTION
1, 27	$\overline{OEAB}$/$\overline{OEBA}$	A-to-B Output enable input (active Low)
29, 56	$\overline{CEBA}$/$\overline{CEAB}$	B-to-A / A-to-B clock enable (active Low)
2, 28	LEAB/LEBA	A-to-B/B-to-A Latch enable input
55,30	$\overline{CPAB}$/$\overline{CPBA}$	A-to-B/B-to-A Clock input (active falling edge)
3, 5, 6, 8, 9, 10, 12, 13, 14, 15, 16, 17, 19, 20, 21, 23, 24, 26	A0-A17	Data inputs/outputs (A side)
54, 52, 51, 49, 48, 47, 45, 44, 43, 42, 41, 40, 38, 37, 36, 34, 33, 31	B0-B17	Data inputs/outputs (B side)
4, 11, 18, 25, 32, 39, 46, 53	GND	Ground (0V)
7, 22, 35, 50	V_{CC}	Positive supply voltage

FUNCTION TABLE

INPUTS					OUTPUT
$\overline{CEAB}$	$\overline{OEAB}$	LEAB	$\overline{CPAB}$	A	B
X	H	X	X	X	Z
X	L	H	X	L	L
X	L	H	X	H	H
H	L	L	X	X	B_O‡
L	L	L	↓	L	L
L	L	L	↓	H	H
L	L	L	H	X	B_O‡
L	L	L	L	X	B_O§

X = Don't care
H = High voltage level
L = Low voltage level
↓ = High-to-Low clock transition
† A-to-B data flow is shown: B-to-A flow is similar but uses $\overline{OEBA}$, LEBA, $\overline{CPBA}$, and $\overline{CEBA}$.
‡ Output level before the indicated steady-state input conditions were established.
§ Output level before the indicated steady-state input conditions were established, provided that CLKAB was Low before LEAB went Low.

PIN CONFIGURATION

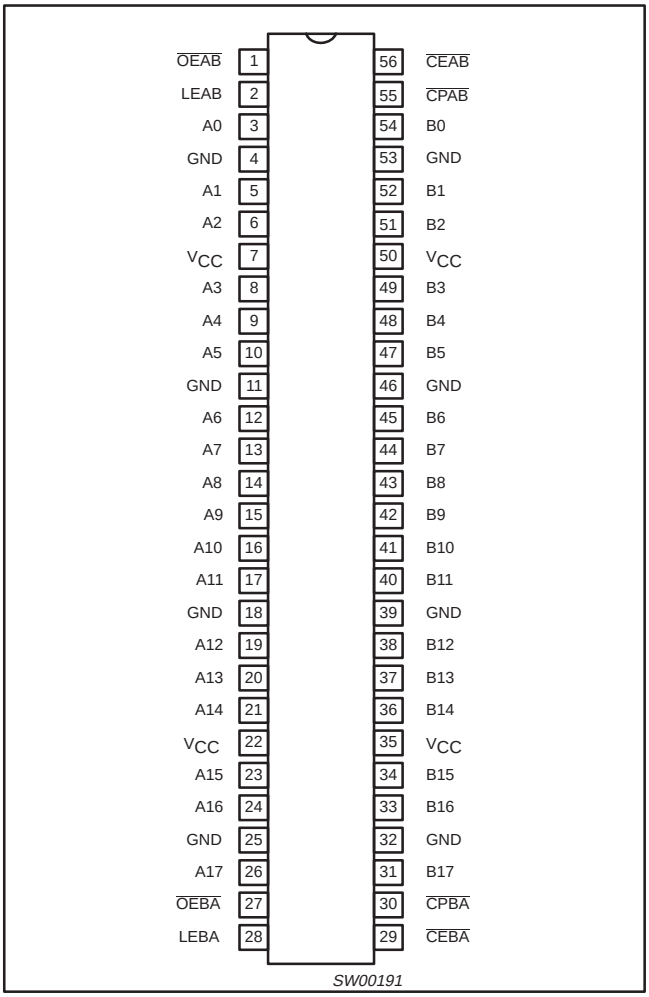

LOGIC DIAGRAM (Positive Logic)

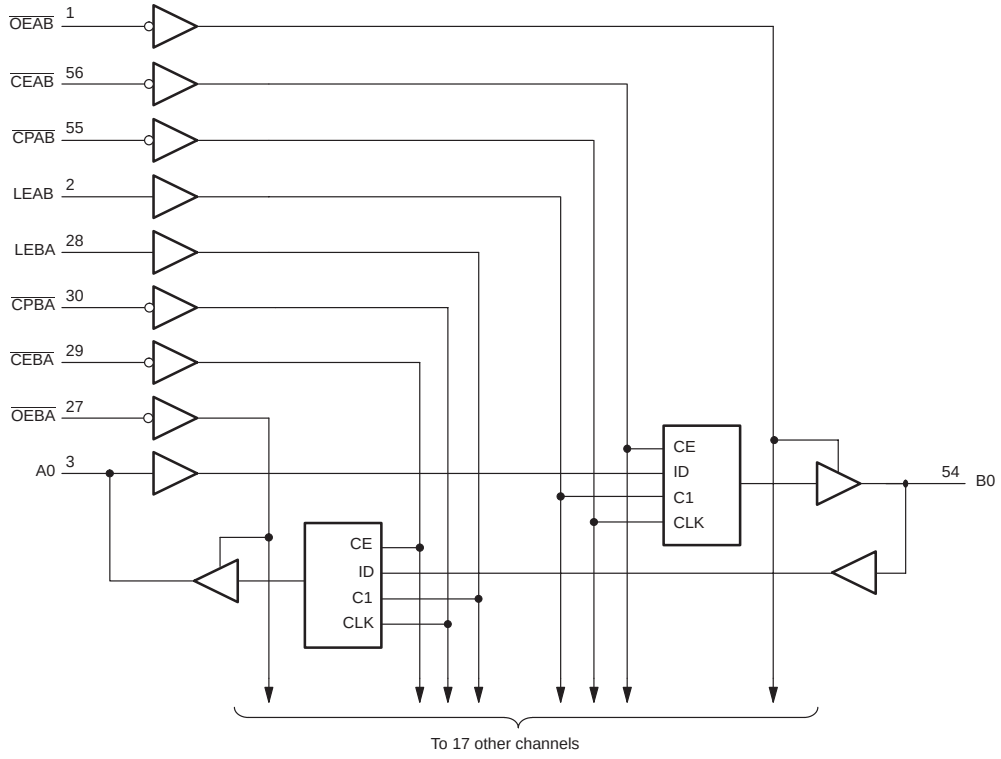

ABSOLUTE MAXIMUM RATINGS[1, 2]

SYMBOL	PARAMETER	CONDITIONS	RATING	UNIT
V_{CC}	DC supply voltage		–0.5 to +4.6	V
I_{IK}	DC input diode current	$V_I < 0$	–50	mA
V_I	DC input voltage[3]		–0.5 to +7.0	V
I_{OK}	DC output diode current	$V_O < 0$	–50	mA
V_{OUT}	DC output voltage[3]	Output in Off or High state	–0.5 to +7.0	V
I_{OUT}	DC output current	Output in Low state	128	mA
		Output in High state	–64	
T_{stg}	Storage temperature range		–65 to +150	°C

NOTES:
1. Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
2. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150°C.
3. The input and output negative voltage ratings may be exceeded if the input and output clamp current ratings are observed.

RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	2.5V RANGE LIMITS		3.3V RANGE LIMITS		UNIT
		MIN	MAX	MIN	MAX	
V_{CC}	DC supply voltage	2.3	2.7	3.0	3.6	V
V_I	Input voltage	0	5.5	0	5.5	V
V_{IH}	High-level input voltage	1.7		2.0		V
V_{IL}	Input voltage		0.7		0.8	V
I_{OH}	High-level output current		–8		–32	mA
I_{OL}	Low-level output current		8		32	mA
	Low-level output current; current duty cycle ≤ 50%; f ≥ 1kHz		24		64	
$\Delta t/\Delta v$	Input transition rise or fall rate; Outputs enabled		10		10	ns/V
T_{amb}	Operating free-air temperature range	–40	+85	–40	+85	°C

DC ELECTRICAL CHARACTERISTICS (3.3V ±0.3V RANGE)

SYMBOL	PARAMETER	TEST CONDITIONS		LIMITS			UNIT
				Temp = -40°C to +85°C			
				MIN	TYP[1]	MAX	
V_{IK}	Input clamp voltage	V_{CC} = 3.0V; I_{IK} = –18mA			–0.85	–1.2	V
V_{OH}	High-level output voltage	V_{CC} = 3.0 to 3.6V; I_{OH} = –100µA		V_{CC}–0.2	V_{CC}		V
		V_{CC} = 3.0V; I_{OH} = –32mA		2.0	2.3		
V_{OL}	Low–level output voltage	V_{CC} = 3.0V; I_{OL} = 100µA			0.07	0.2	V
		V_{CC} = 3.0V; I_{OL} = 16mA			0.25	0.4	
		V_{CC} = 3.0V; I_{OL} = 32mA			0.3	0.5	
		V_{CC} = 3.0V; I_{OL} = 64mA			0.4	0.55	
V_{RST}	Power-up output low voltage[6]	V_{CC} = 3.6V; I_O = 1mA; V_I = V_{CC} or GND				0.55	V
I_I	Input leakage current	V_{CC} = 3.6V; V_I = V_{CC} or GND	Control pins		0.1	±1	µA
		V_{CC} = 0 or 3.6V; V_I = 5.5V			0.1	10	
		V_{CC} = 3.6V; V_I = 5.5V	Data pins[4]		0.1	20	
		V_{CC} = 3.6V; V_I = V_{CC}			0.5	10	
		V_{CC} = 3.6V; V_I = 0V			0.1	-5	
I_{OFF}	Off current	V_{CC} = 0V; V_I or V_O = 0 to 4.5V			0.1	±100	µA
I_{HOLD}	Bus Hold current Data inputs[7]	V_{CC} = 3V; V_I = 0.8V		75	130		µA
		V_{CC} = 3V; V_I = 2.0V		–75	–140		
		V_{CC} = 0V to 3.6V; V_{CC} = 3.6V		±500			
I_{EX}	Current into an output in the High state when $V_O > V_{CC}$	V_O = 5.5V; V_{CC} = 3.0V			10	125	µA
$I_{PU/PD}$	Power up/down 3-State output current[3]	V_{CC} ≤ 1.2V; V_O = 0.5V to V_{CC}; V_I = GND or V_{CC} $\overline{OE}$ = Don't care			1.0	±100	µA
I_{CCH}	Quiescent supply current	V_{CC} = 3.6V; Outputs High, V_I = GND or V_{CC}, I_O = 0			0.06	0.1	mA
I_{CCL}		V_{CC} = 3.6V; Outputs Low, V_I = GND or V_{CC}, I_O = 0			4.0	5	
I_{CCZ}		V_{CC} = 3.6V; Outputs Disabled; V_I = GND or V_{CC}, I_O = 0[5]			0.06	0.1	
ΔI_{CC}	Additional supply current per input pin[2]	V_{CC} = 3V to 3.6V; One input at V_{CC}–0.6V, Other inputs at V_{CC} or GND			0.04	0.4	mA

NOTES:
1. All typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.
2. This is the increase in supply current for each input at the specified voltage level other than V_{CC} or GND
3. This parameter is valid for any V_{CC} between 0V and 1.2V with a transition time of up to 10msec. From V_{CC} = 1.2V to V_{CC} = 3.3V ± 0.3V a transition time of 100µsec is permitted. This parameter is valid for T_{amb} = 25°C only.
4. Unused pins at V_{CC} or GND.
5. I_{CCZ} is measured with outputs pulled up to V_{CC} or pulled down to ground.
6. For valid test results, data must not be loaded into the flip-flops (or latches) after applying power.
7. This is the bus hold overdrive current required to force the input to the opposite logic state.

AC CHARACTERISTICS (3.3V ±0.3V RANGE)

GND = 0V; $t_R = t_F$ = 2.5ns; C_L = 50pF; R_L = 500Ω; T_{amb} = –40°C to +85°C.

SYMBOL	PARAMETER	WAVEFORM	LIMITS			UNIT
			V_{CC} = 3.3V ±0.3V			
			MIN	TYP[1]	MAX	
f_{MAX}	Maximum clock frequency	1		300		MHz
t_{PLH} t_{PHL}	Propagation delay An to Bn or Bn to An	2	1.0 1.0	1.6 1.9	2.3 2.8	ns
t_{PLH} t_{PHL}	Propagation delay Clock Low or High LEAB to Bn or LEBA to An	3	1.5 1.5	2.2 2.5	3.3 4.2	ns
t_{PLH} t_{PHL}	Propagation delay $\overline{CPAB}$ to Bn or $\overline{CPBA}$ to An	1	1.5 1.5	2.6 3.2	4.2 4.8	ns
t_{PZH} t_{PZL}	Output enable time to High and Low level	5 6	1.5 1.0	2.2 1.6	3.4 2.6	ns
t_{PHZ} t_{PLZ}	Output disable time from High and Low Level	5 6	1.5 1.5	2.6 2.3	3.8 3.5	ns

NOTE:
1. All typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.

AC SETUP REQUIREMENTS (3.3V ±0.3V RANGE)

GND = 0V; $t_R = t_F$ = 2.5ns; C_L = 50pF, R_L = 500Ω; T_{amb} = –40°C to +85°C.

SYMBOL	PARAMETER	WAVEFORM	LIMITS		UNIT
			V_{CC} = 3.3V ±0.3V		
			MIN	TYP[1]	
ts(H) ts(L)	Setup time, High or Low An to $\overline{CPAB}$ or Bn to $\overline{CPBA}$	4	2.0 2.0	0.8 0.9	ns
th(H) th(L)	Hold time, High or Low An to $\overline{CPAB}$ or Bn to $\overline{CPBA}$	4	0.0 0.0	–0.9 –0.7	ns
ts(H) ts(L)	Setup time, High or Low Clock Low An to LEAB or Bn to $\overline{CPBA}$	4	1.0 1.0	–0.4 –0.1	ns
th(H) th(L)	Hold time, High or Low Clock High An to LEAB or Bn to LEBA	4	1.0 1.0	0.1 0.4	ns
ts(H) ts(L)	Setup time $\overline{CEAB}$ before $\overline{CPAB}$ or $\overline{CEBA}$ before $\overline{CPBA}$	4	1.5 1.0	0.3 –0.6	ns
th(H) th(L)	Hold time $\overline{CEAB}$ after $\overline{CPAB}$ or $\overline{CEBA}$ after $\overline{CPBA}$	4	1.5 1.0	0.7 –0.2	ns
tw(H) tw(L)	Pulse width, High or Low $\overline{CPAB}$ or $\overline{CPBA}$	1	1.5 1.5		ns
tw(H)	LEAB or LEBA pulse width, High	3	1.5		ns

NOTE:
1. All typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.

DC ELECTRICAL CHARACTERISTICS (2.5V ±0.2V RANGE)

SYMBOL	PARAMETER	TEST CONDITIONS		LIMITS			UNIT
				Temp = -40°C to +85°C			
				MIN	TYP[1]	MAX	
V_{IK}	Input clamp voltage	V_{CC} = 2.3V; I_{IK} = –18mA			–0.85	–1.2	V
V_{OH}	High-level output voltage	V_{CC} = 2.3 to 3.6V; I_{OH} = –100µA		V_{CC}–0.2			V
		V_{CC} = 2.3V; I_{OH} = –8mA		1.8			
V_{OL}	Low-level output voltage	V_{CC} = 2.3V; I_{OL} = 100µA			0.07	0.2	V
		V_{CC} = 2.3V; I_{OL} = 24mA			0.3	0.5	
		V_{CC} = 2.3V; I_{OL} = 8mA				0.4	
V_{RST}	Power-up output low voltage[7]	V_{CC} = 2.7V; I_O = 1mA; V_I = V_{CC} or GND				0.55	V
I_I	Input leakage current	V_{CC} = 2.7V; V_I = V_{CC} or GND	Control pins		0.1	±1	µA
		V_{CC} = 0 or 2.7V; V_I = 5.5V			0.1	10	
		V_{CC} = 2.7V; V_I = 5.5V	Data pins[4]		0.1	20	
		V_{CC} = 2.7V; V_I = V_{CC}			0.1	1	
		V_{CC} = 2.7V; V_I = 0			0.1	-5	
I_{OFF}	Off current	V_{CC} = 0V; V_I or V_O = 0 to 4.5V			0.1	±100	µA
I_{HOLD}	Bus Hold current Data inputs[6]	V_{CC} = 2.3V; V_I = 0.7V			90		µA
		V_{CC} = 2.3V; V_I = 1.7V			–75		
I_{EX}	Current into an output in the High state when V_O > V_{CC}	V_O = 5.5V; V_{CC} = 2.3V			10	125	µA
$I_{PU/PD}$	Power up/down 3-State output current[3]	V_{CC} ≤ 1.2V; V_O = 0.5V to V_{CC}; V_I = GND or V_{CC}; $\overline{OE}$ = Don't care			1	100	µA
I_{CCH}	Quiescent supply current	V_{CC} = 2.7V; Outputs High, V_I = GND or V_{CC}, I_O = 0			0.04	0.1	mA
I_{CCL}		V_{CC} = 2.7V; Outputs Low, V_I = GND or V_{CC}, I_O = 0			3.0	4.5	
I_{CCZ}		V_{CC} = 2.7V; Outputs Disabled; V_I = GND or V_{CC}, I_O = 0[5]			0.04	0.1	
ΔI_{CC}	Additional supply current per input pin[2]	V_{CC} = 2.3V to 2.7V; One input at V_{CC}–0.6V, Other inputs at V_{CC} or GND			0.01	0.4	mA

NOTES:
1. All typical values are at V_{CC} = 2.5V and T_{amb} = 25°C.
2. This is the increase in supply current for each input at the specified voltage level other than V_{CC} or GND
3. This parameter is valid for any V_{CC} between 0V and 1.2V with a transition time of up to 10msec. From V_{CC} = 1.2V to V_{CC} = 2.5V ± 0.2V a transition time of 100µsec is permitted. This parameter is valid for T_{amb} = 25°C only.
4. Unused pins at V_{CC} or GND.
5. I_{CCZ} is measured with outputs pulled up to V_{CC} or pulled down to ground.
6. Not guaranteed.
7. For valid test results, data must not be loaded into the flip-flops (or latches) after applying power.

AC CHARACTERISTICS (2.5V ±0.2V RANGE)

GND = 0V; $t_R = t_F$ = 2.5ns; C_L = 50pF; R_L = 500Ω; T_{amb} = –40°C to +85°C.

SYMBOL	PARAMETER	WAVEFORM	LIMITS			UNIT
			V_{CC} = 2.5V ±0.2V			
			MIN	TYP[1]	MAX	
f_{MAX}	Maximum clock frequency	1		250		MHz
t_{PLH} t_{PHL}	Propagation delay An to Bn or Bn to An	2	1.0 1.5	1.9 2.5	3.0 3.6	ns
t_{PLH} t_{PHL}	Propagation delay Clock Low or High LEAB to Bn or LEBA to An	3	2.0 2.5	3.0 3.3	4.5 5.1	ns
t_{PLH} t_{PHL}	Propagation delay $\overline{CPAB}$ to Bn or $\overline{CPBA}$ to An	1	2.5 2.5	3.8 4.5	5.6 6.7	ns
t_{PZH} t_{PZL}	Output enable time to High and Low level	5 6	2.0 1.0	3.1 2.0	4.4 3.0	ns
t_{PHZ} t_{PLZ}	Output disable time from High and Low Level	5 6	1.5 1.5	2.5 2.3	4.1 3.6	ns

NOTE:
1. All typical values are at V_{CC} = 3.3V and T_{amb} = 25°C.

AC SETUP REQUIREMENTS (2.5V ±0.2V RANGE)

GND = 0V; $t_R = t_F$ = 2.5ns; C_L = 50pF, R_L = 500Ω; T_{amb} = –40°C to +85°C.

SYMBOL	PARAMETER	WAVEFORM	LIMITS		UNIT
			V_{CC} = 2.5V ±0.2V		
			MIN	TYP[1]	
ts(H) ts(L)	Setup time, High or Low An to $\overline{CPAB}$ or Bn to $\overline{CPBA}$	4	1.5 2.0	0.5 1.1	ns
th(H) th(L)	Hold time, High or Low An to $\overline{CPAB}$ or Bn to $\overline{CPBA}$	4	0.0 1.0	–1.1 –0.4	ns
ts(H) ts(L)	Setup time, High or Low Clock Low An to LEAB or Bn to $\overline{CPBA}$	4	0.0 1.5	–0.8 0.4	ns
th(H) th(L)	Hold time, High or Low Clock High An to LEAB or Bn to LEBA	4	1.0 1.5	–0.4 0.9	ns
ts(H) ts(L)	Setup time $\overline{CEAB}$ before $\overline{CPAB}$ or $\overline{CEBA}$ before $\overline{CPBA}$	4	1.0 1.0	–0.3 –0.5	ns
th(H) th(L)	Hold time $\overline{CEAB}$ after $\overline{CPAB}$ or $\overline{CEBA}$ after $\overline{CPBA}$	4	1.5 1.5	0.8 0.5	ns
tw(H) tw(L)	Pulse width, High or Low $\overline{CPAB}$ or $\overline{CPBA}$	1	2.5 2.5		ns
tw(H)	LEAB or LEBA pulse width, High	3	1.5		ns

NOTE:
1. All typical values are at V_{CC} = 2.5V and T_{amb} = 25°C.

AC WAVEFORMS

NOTES:

1. V_M = 1.5V at $V_{CC} \geq$ 3.0V, $V_M = V_{CC}/2$ at $V_{CC} \leq$ 2.7V
2. $V_X = V_{OL}$ + 0.3V at $V_{CC} \geq$ 3.0V, $V_X = V_{OL}$ + 0.15V at $V_{CC} \leq$ 2.7V
3. $V_Y = V_{OH}$ – 0.3V at $V_{CC} \geq$ 3.0V, $V_Y = V_{OH}$ – 0.15V at $V_{CC} \leq$ 2.7V

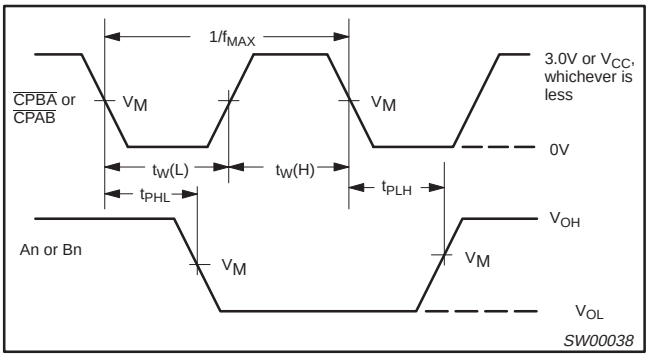

Waveform 1. Propagation Delay, Clock Input to Output, Clock Pulse Width, and Maximum Clock Frequency

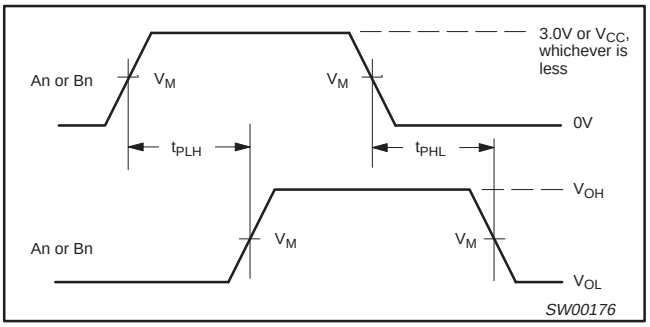

Waveform 2. Propagation Delay, Transparent Mode

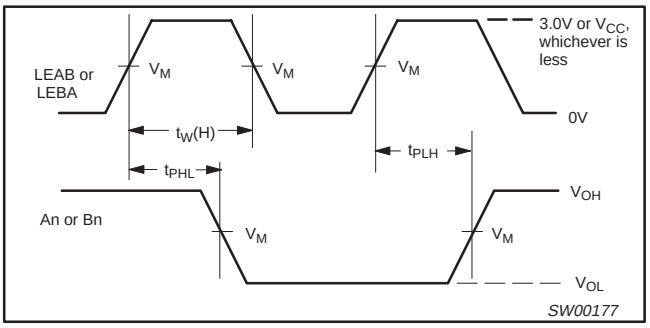

Waveform 3. Propagation Delay, Enable to Output, and Enable Pulse Width

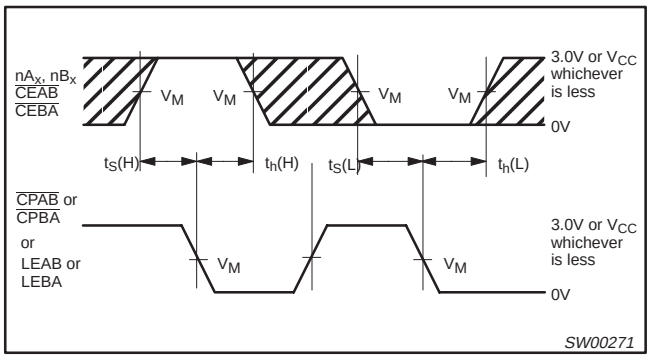

Waveform 4. Data Setup and Hold Times

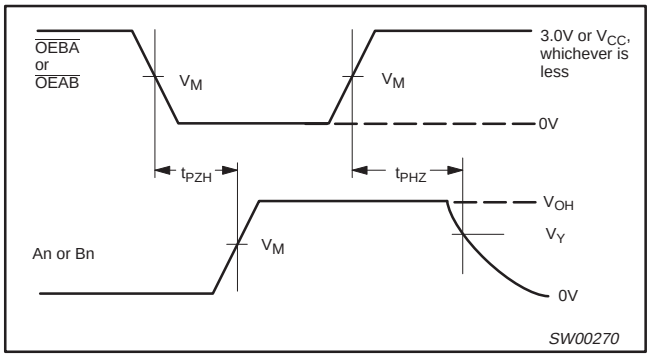

Waveform 5. 3-State Output Enable Time to High Level and Output Disable Time from High Level

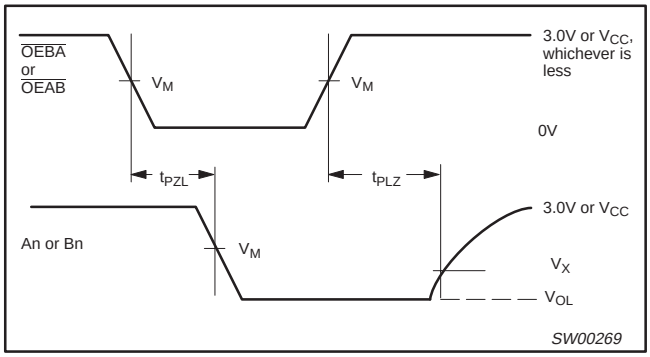

Waveform 6. 3-State Output Enable Time to Low Level and Output Disable Time from Low Level

TEST CIRCUIT AND WAVEFORMS

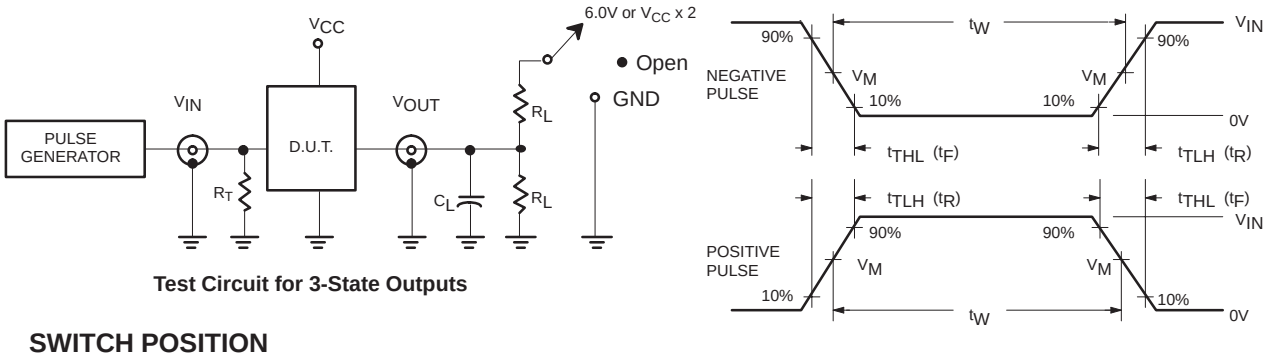

Test Circuit for 3-State Outputs

SWITCH POSITION

TEST	SWITCH
t_{PLZ}/t_{PZL}	6V or $V_{CC\ x\ 2}$
t_{PLH}/t_{PHL}	Open
t_{PHZ}/t_{PZH}	GND

DEFINITIONS

R_L = Load resistor; see AC CHARACTERISTICS for value.

C_L = Load capacitance includes jig and probe capacitance: See AC CHARACTERISTICS for value.

R_T = Termination resistance should be equal to Z_{OUT} of pulse generators.

FAMILY	INPUT PULSE REQUIREMENTS				
	Amplitude	Rep. Rate	t_W	t_R	t_F
74ALVT16	3.0V or V_{CC} whichever is less	≤ 10MHz	500ns	≤ 2.5ns	≤ 2.5ns

SW00025

SSOP56: plastic shrink small outline package; 56 leads; body width 7.5 mm **SOT371-1**

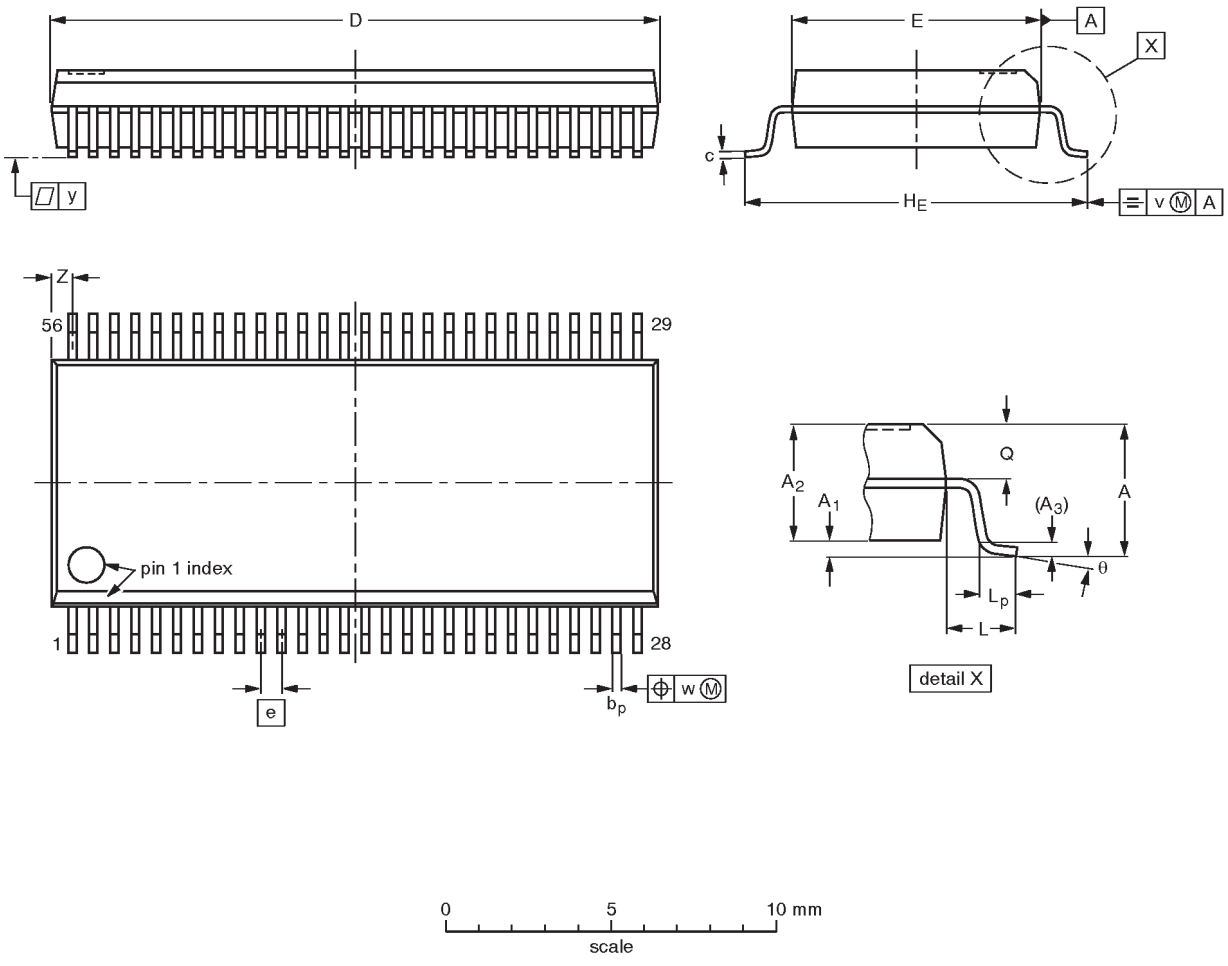

DIMENSIONS (mm are the original dimensions)

UNIT	A max.	A_1	A_2	A_3	b_p	c	D (1)	E (1)	e	H_E	L	L_p	Q	v	w	y	Z (1)	θ
mm	2.8	0.4 0.2	2.35 2.20	0.25	0.3 0.2	0.22 0.13	18.55 18.30	7.6 7.4	0.635	10.4 10.1	1.4	1.0 0.6	1.2 1.0	0.25	0.18	0.1	0.85 0.40	8° 0°

Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT371-1		MO-118AB				~~93-11-02~~ 95-02-04

TSSOP56: plastic thin shrink small outline package; 56 leads; body width 6.1mm **SOT364-1**

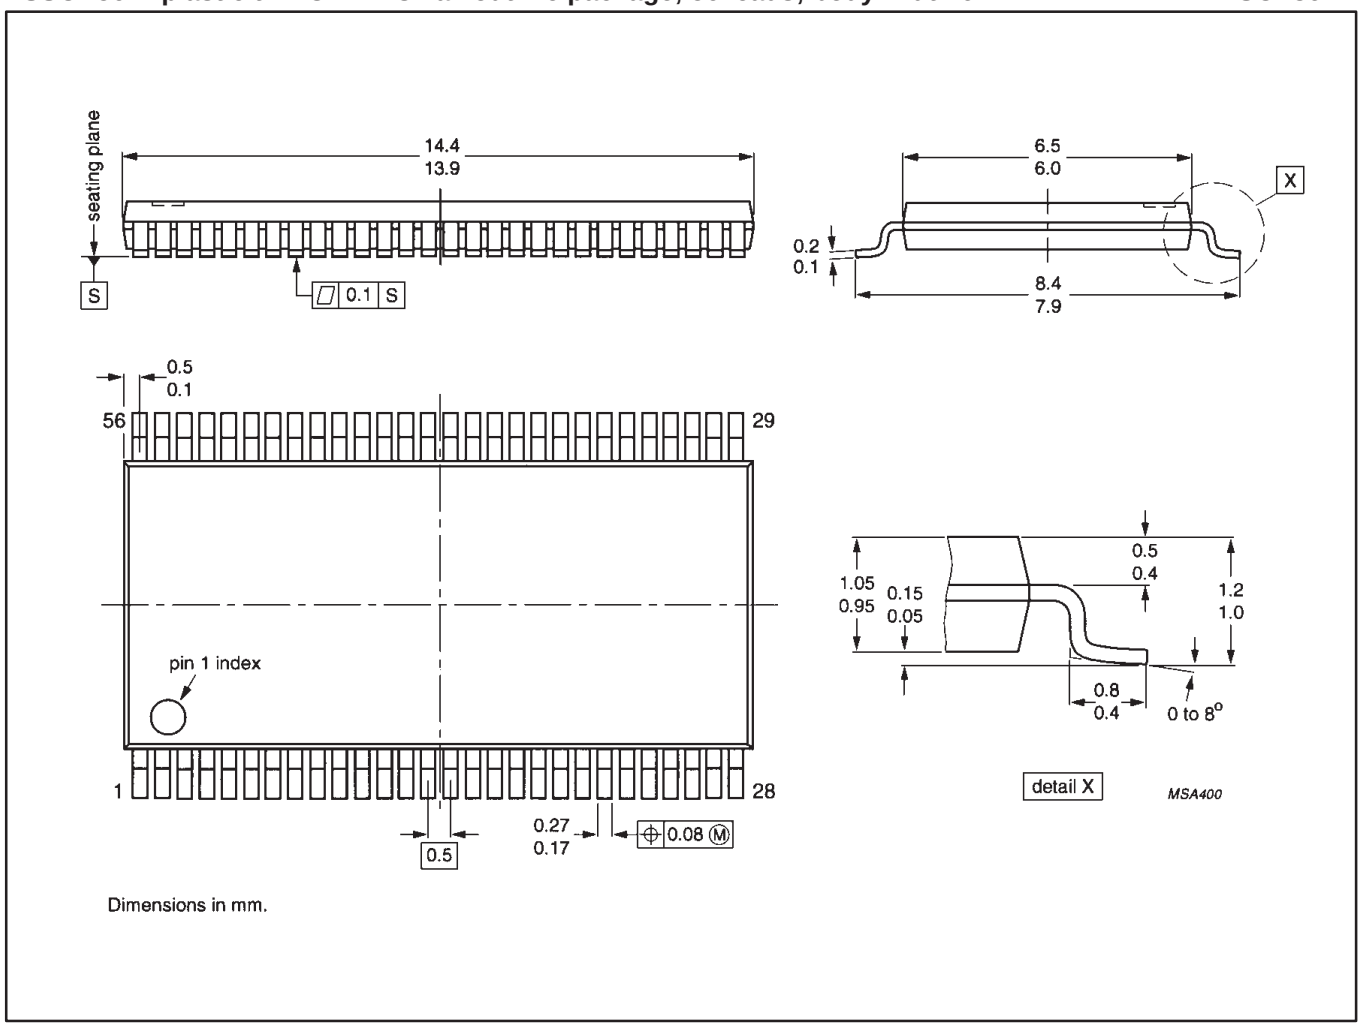

Dimensions in mm.

NOTES

Data sheet status

Data sheet status	Product status	Definition [1]
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make chages at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

[1] Please consult the most recently issued datasheet before initiating or completing a design.

Definitions

Short-form specification — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

Application information — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Disclaimers

Life support — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors
811 East Arques Avenue
P.O. Box 3409
Sunnyvale, California 94088–3409
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 1998
All rights reserved. Printed in U.S.A.

print code Date of release: 05-96

Document order number: 9397-750-03569

Let's make things better.

Philips Semiconductors

PHILIPS