

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

NOV ,2001.

© COPYRIGHT 2001 By --

ALL RIGHTS RESERVED.

LOC
J

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

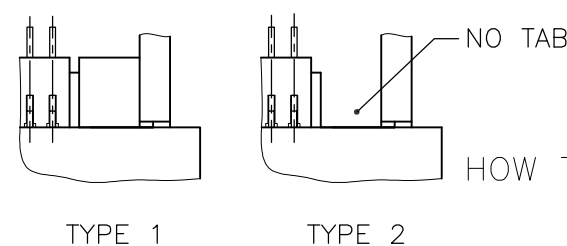
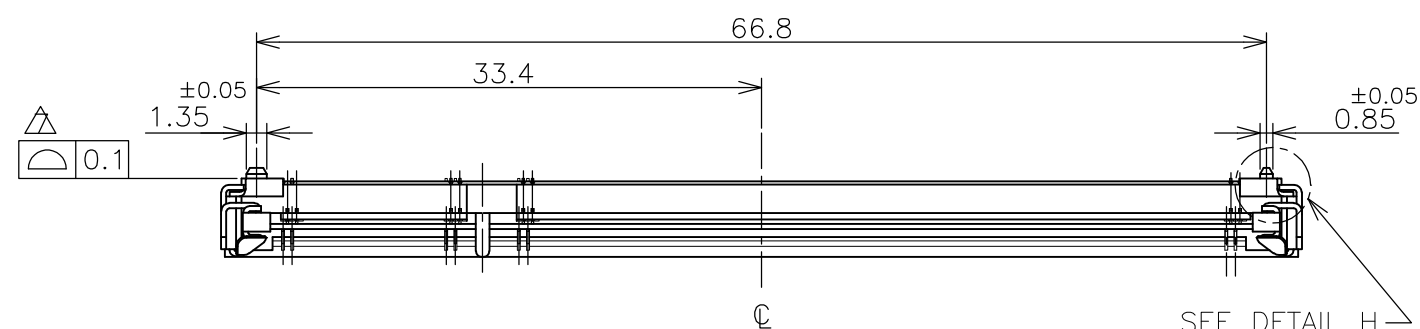
J2

REVISED PER ECO-11-005033

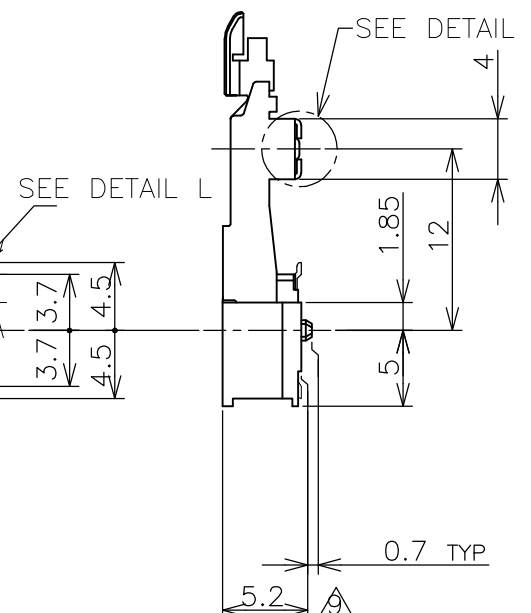
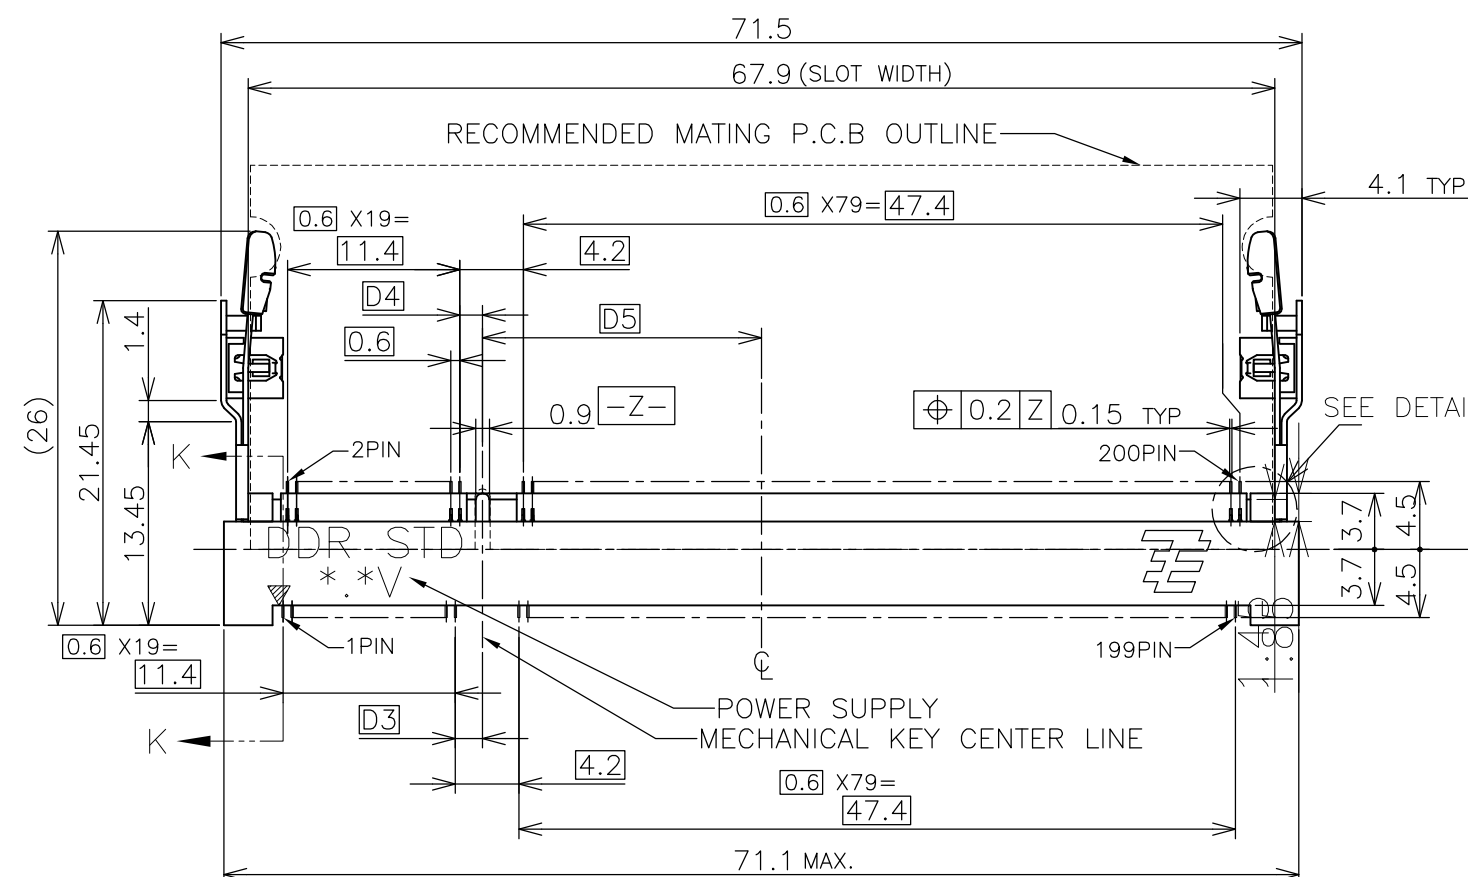
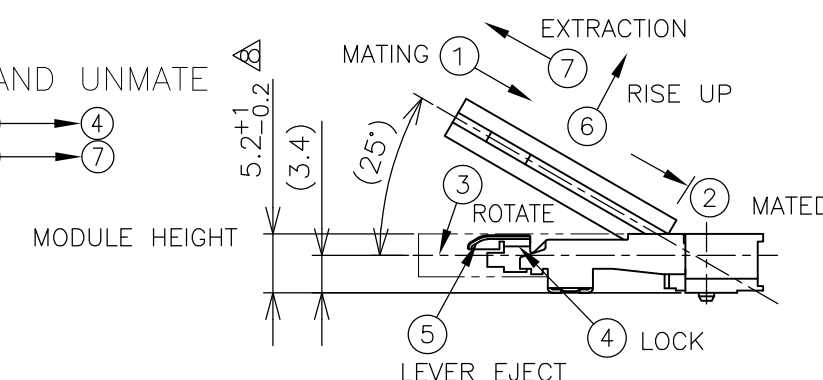
24MAR11

RK

HMR



HOW TO MATE AND UNMATE

 MATE: ① → ④
 UNMATE: ⑤ → ⑦
DETAIL L
(SCALE 5:1)

(APPLIED TO SHEET 1-2)

 1. MATERIAL ; HOUSING: HIGH TEMPERATURE THERMO PLASTIC UL94V-0
 CONTACT: COPPER ARROY
 LOCK LEVER: STAINLESS STEEL
 SOLDER PEG: COPPER ARROY

 △ FINISH ; CONTACT AREA: GOLD FLASH ON 0.0013MIN ALL OVER NICKEL.
 SOLDERING AREA: GOLD FLASH PLT.
 SOLDER PEG: TIN PLATING.

△ MECHANICAL KEY POSITION OF CONNECTOR SEE TABLE.

△ TOLERANCES NON-CUMULATIVE.

△ NOT TO SCALE.

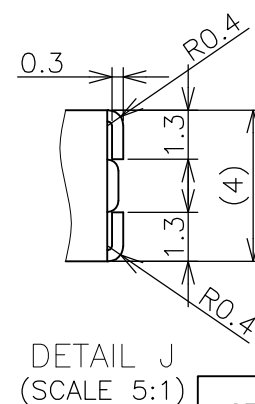
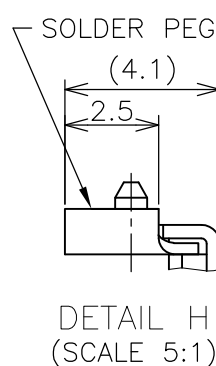
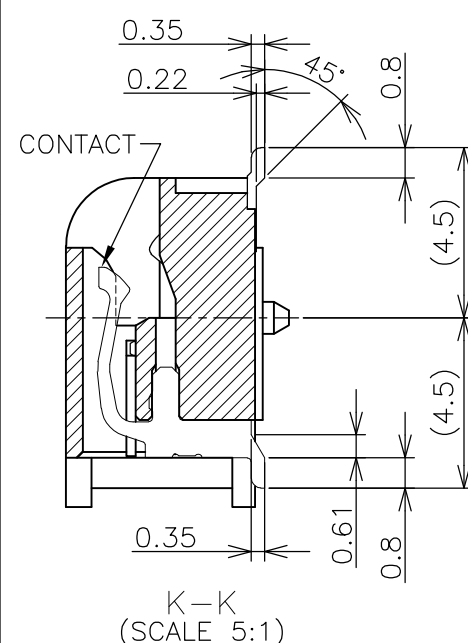
△ INSIDE MUST BE RESIST COAT EXCEPT SOLDER PATTERN.

△ COPLANARITY : 0.1 MAX.

△ THE FLOATING VALUE BY SOLDERING IS NOT INCLUDED.

△ NOT MATING CONDITION.

 △ FINISH ; CONTACT AREA: 0.00076 GOLD ON 0.0013MIN ALL OVER NICKEL.
 SOLDERING AREA: 0.00076 GOLD PLT.
 SOLDER PEG: TIN PLATING.

 11 IF THE MODULE DOESN'T INSERT AND LOCK IN THE LATCH SMOOTHLY,
 OPEN WIDE BOTH LATCHES BY MANUAL. AND THE MODULE MUST BE
 INSERTED AND LOCKED IN THE LATCH.

 GENERAL TOLERANCE
 $10 \geq : \pm 0.2$
 $30 \geq > 10 : \pm 0.25$
 $100 \geq > 30 : \pm 0.3$
 ANGLES: $\pm 3^\circ$

TYPE 1	△	AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1473005-5
TYPE 2	△	AVAILABLE	BOSSLESS	1.8V (DDR2)	17.55	2.4	2.7	200	1-1473005-4
TYPE 2	△	AVAILABLE	—H—	1.8V (DDR2)	17.55	2.4	2.7	200	1473005-4
TYPE 1	△	AVAILABLE	HOUSING COLOR:GRAY BOSSLESS	2.5V (DDR1)	18.45	1.5	1.8	200	6-1473005-1
TYPE 1	△	AVAILABLE	BOSSLESS	2.5V (DDR1)	18.45	1.5	1.8	200	1-1473005-1
TYPE 1	△	AVAILABLE	—H—	2.5V (DDR1)	18.45	1.5	1.8	200	1473005-1
TAB TYPE	FINISH	TOOLING STATUS	REMARK	POWER SUPPLY (TYPE)	D5	D4	D3	POS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN B.WONG 15JUL10

CHK C.WANG 15JUL10

APVD S.YAO 15JUL10

PRODUCT SPEC

108-5701

APPLICATION SPEC

WEIGHT 4.7g

CUSTOMER DRAWING

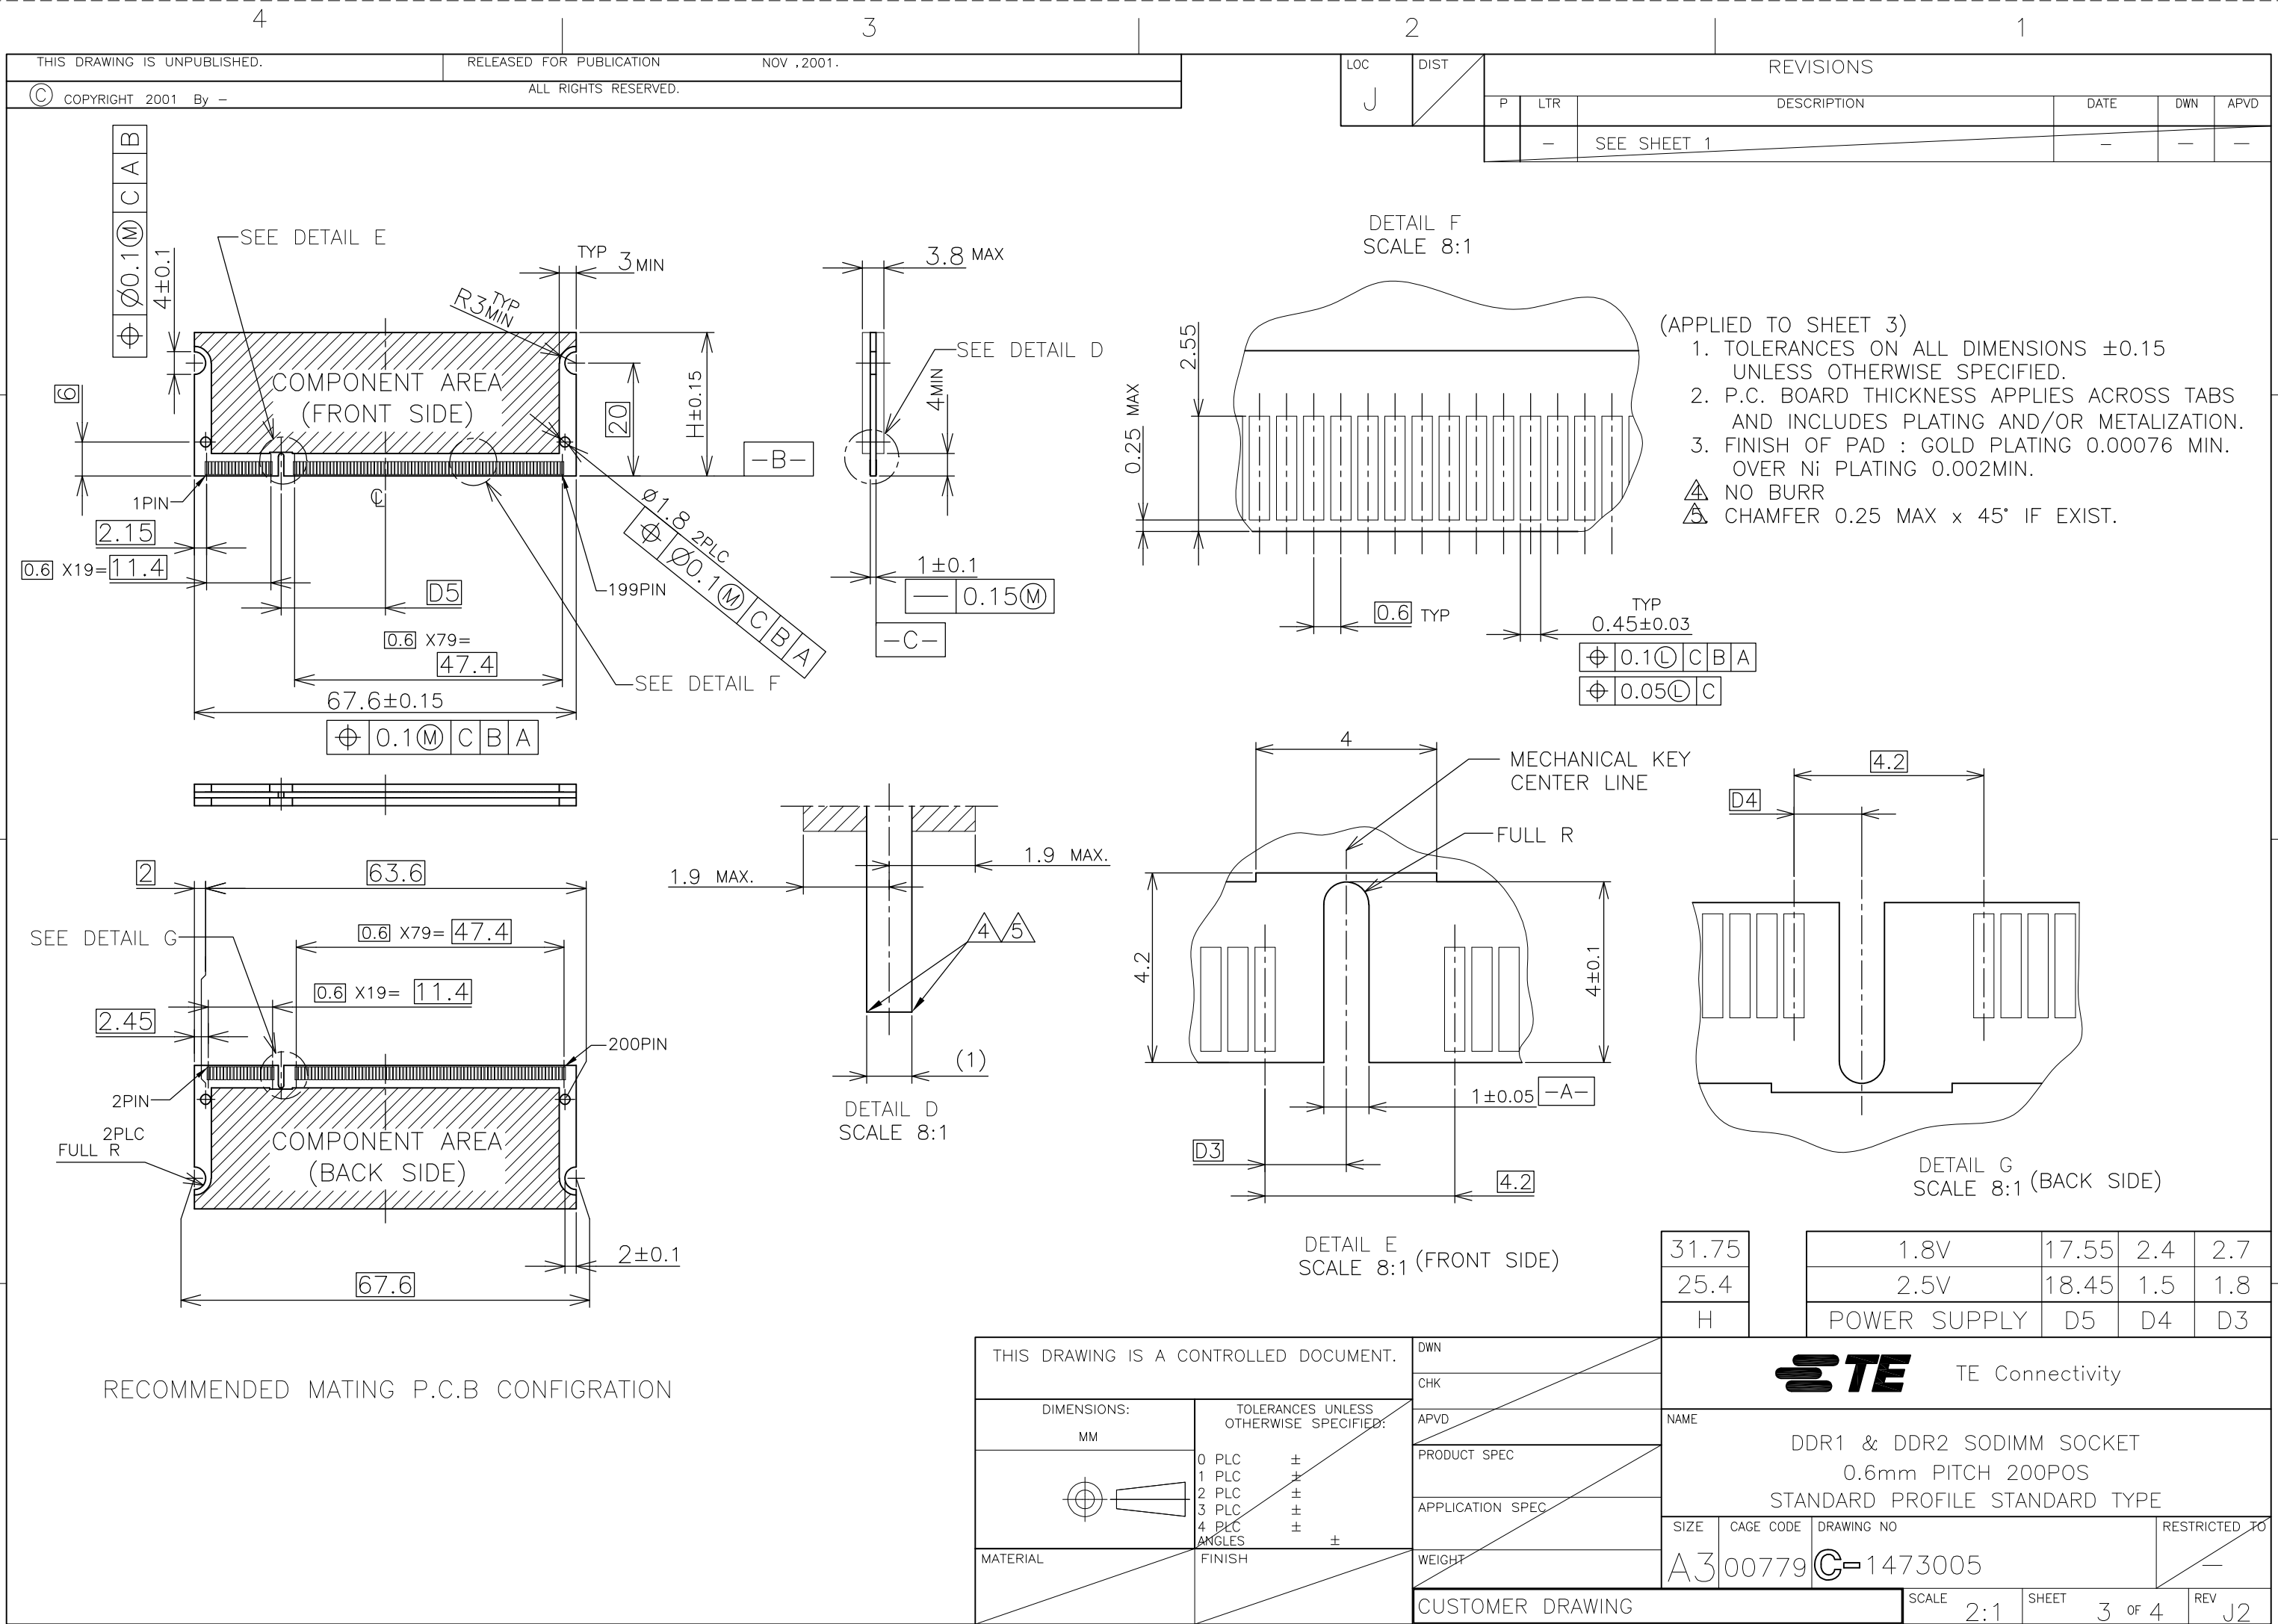
STE TE Connectivity

 DDR1 & DDR2 SODIMM SOCKET
 0.6mm PITCH 200POS
 STANDARD PROFILE STANDARD TYPE

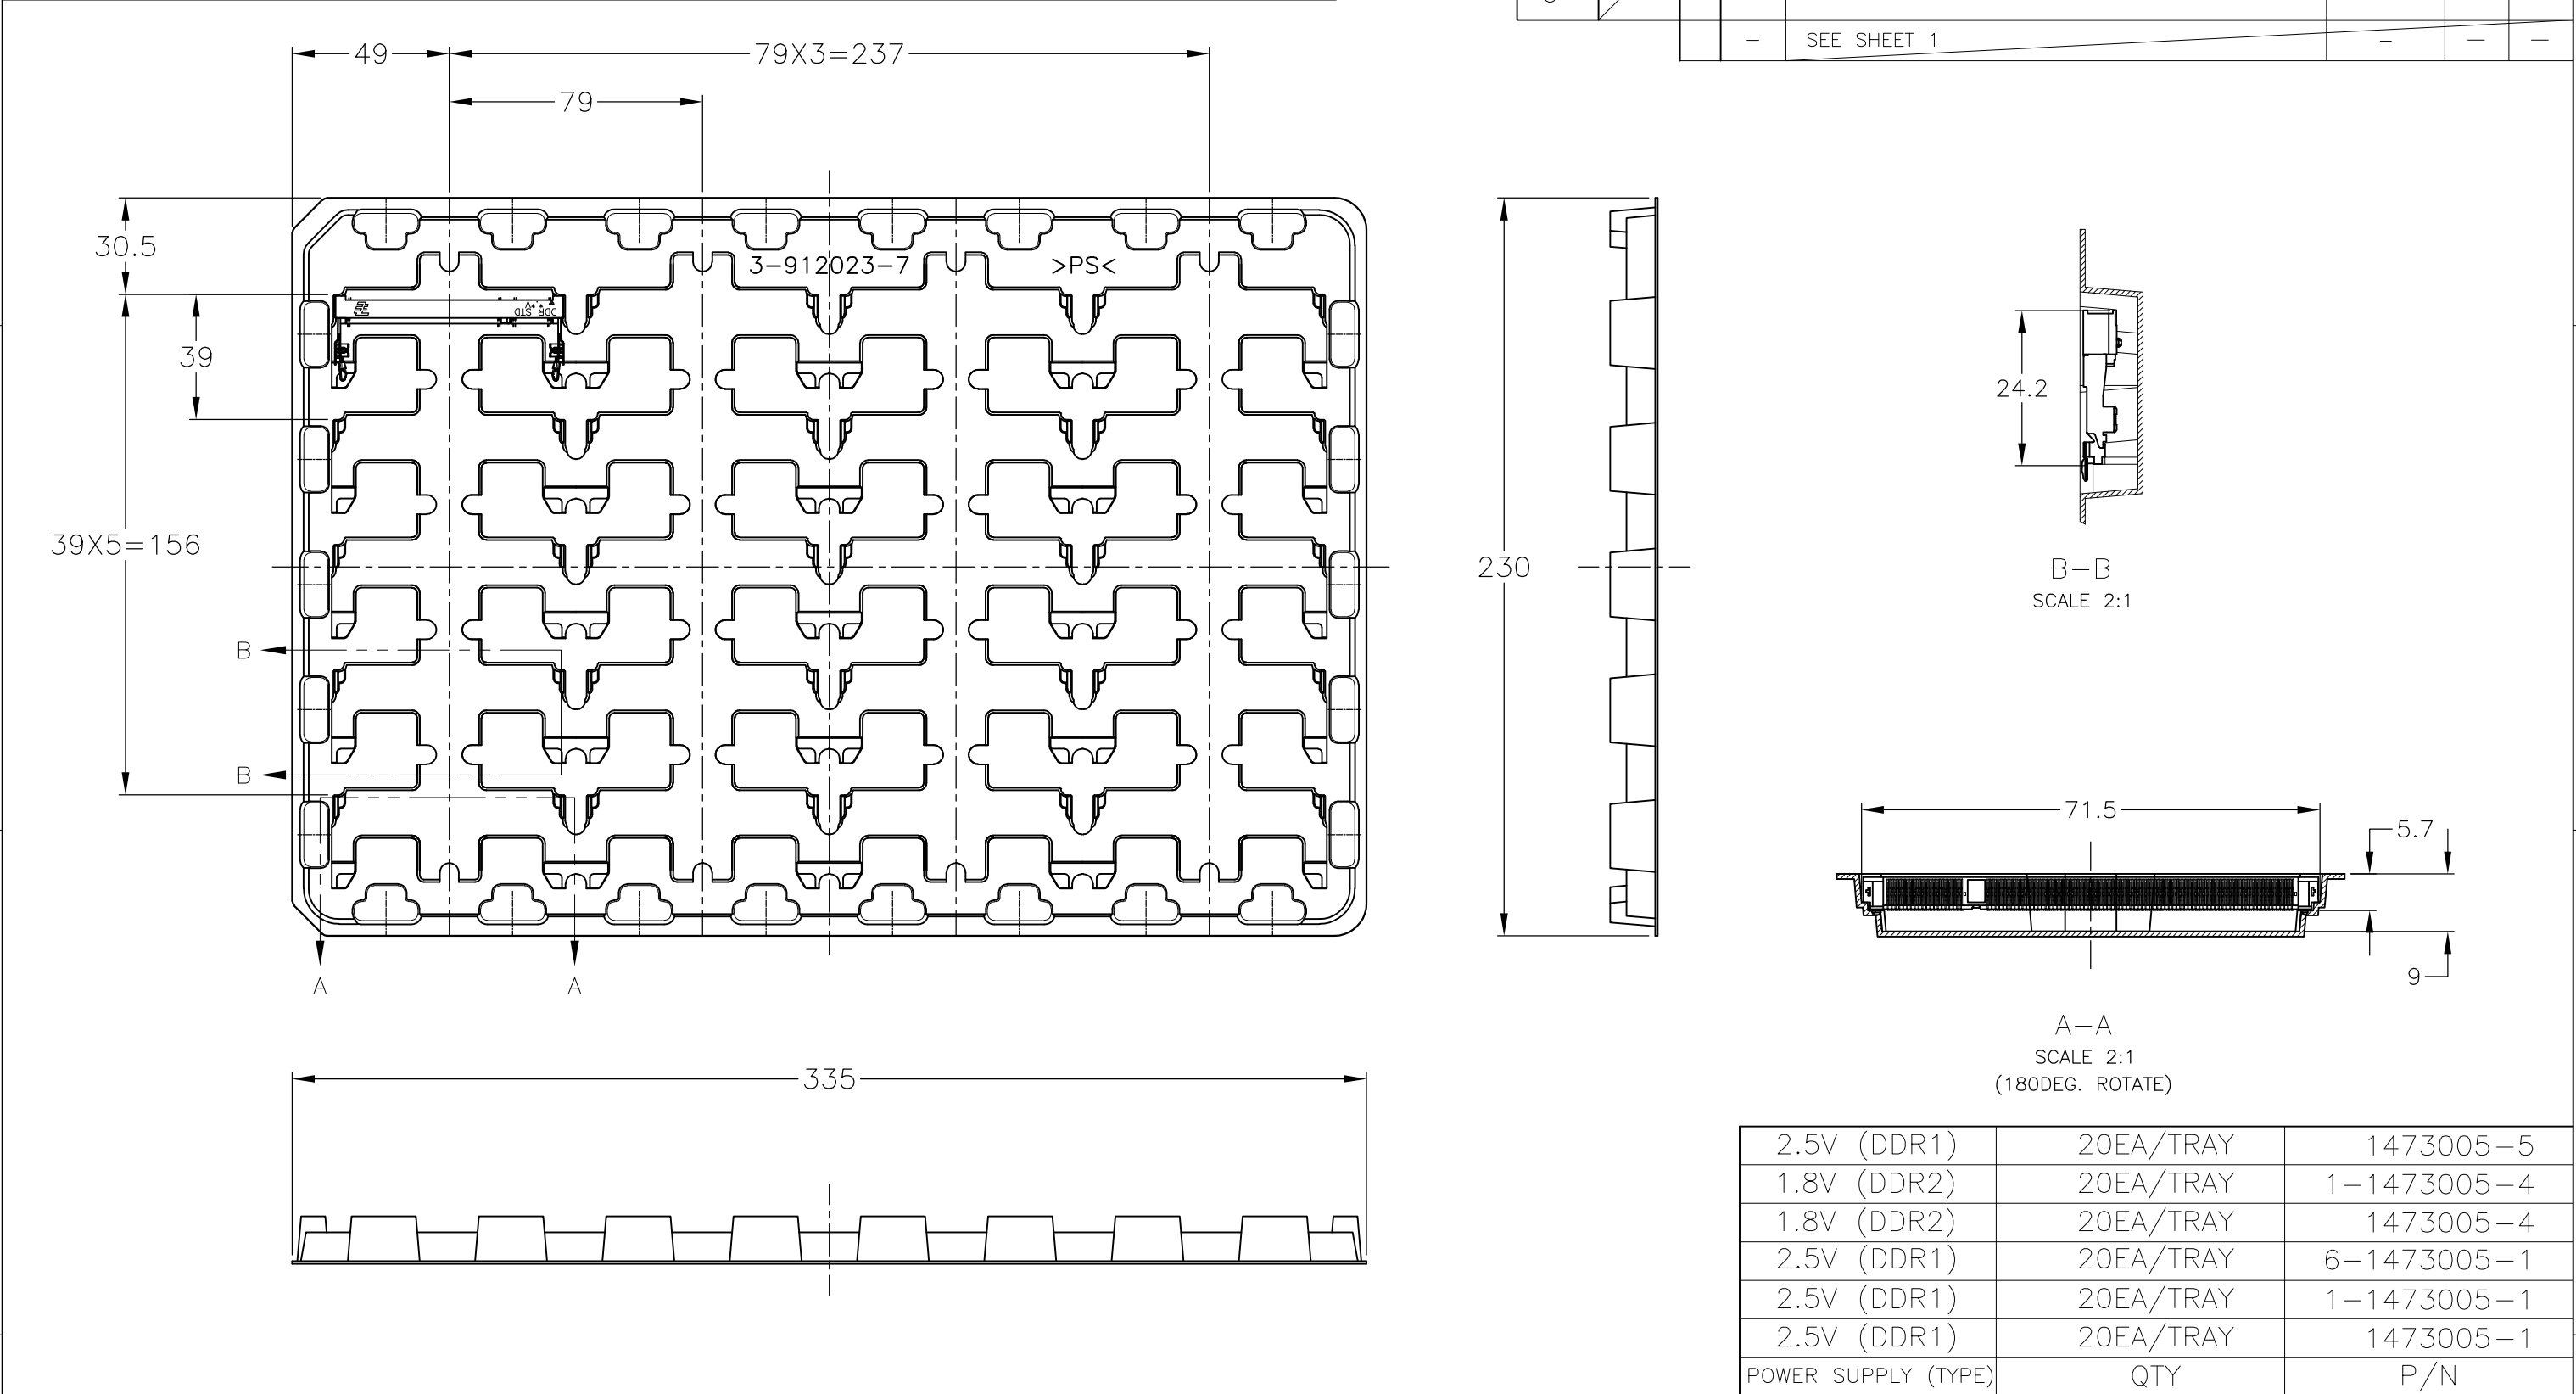
SIZE CAGE CODE DRAWING NO RESTRICTED TO

A300779 C-1473005


SCALE 2:1 SHEET 1 OF 4 REV J2



LOC		DIST		REVISIONS					
P	LTR	DESCRIPTION			DATE	DWN	APVD		
	-	SEE SHEET 1			-	-	-		



- (APPLIED TO SHEET 4)
1. THE DIRECTION OF EACH CONNECTOR ON A TRAY IS REFERRED TO THIS DRAWING.
 2. GENERAL TOLERANCE: ± 0.5

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity			
DIMENSIONS: MM		CHK		NAME			
		APVD		DDR1 & DDR2 SODIMM SOCKET 0.6mm PITCH 200POS STANDARD PROFILE STANDARD TYPE			
		PRODUCT SPEC					
MATERIAL		APPLICATION SPEC		SIZE			
		WEIGHT		CAGE CODE			
		CUSTOMER DRAWING		DRAWING NO			
				RESTRICTED TO			
				SCALE			
				SHEET			
				REV			