Line Switch, fits to Felcom



Line switch

## Description
- Component:
  Snap-in version from front side
- 1 Function:
  Line Switch 2-pole
- For PCB mounting, fits to Felcom

## Characteristics
- Line switch non-illuminated
- Qualified for use in equipment according IEC/EN 60950

## Other versions on request
- Other rocker marking

## References
General Product Information

## Weblinks
Approvals, RoHS, CHINA-RoHS, Mating Connectors, e-Store, Distributor-Stock-Check, Accessories


## Technical Data

| | |
|---|---|
| Ratings IEC | 10 A / 250 VAC; 50 Hz |
| Ratings UL/CSA | 15 A / 125/250 VAC; 60 Hz |
| Allowable Operation Temp. | -25 °C to 70 °C |
| Degree of Protection | from front side IP 40 acc. to IEC 60529 |
| Protection Class | Suitable for appliances with protection class 1 acc. to IEC 61140 |
| Terminal | For PCB mounting |
| Panel Thickness s | Snap-in: 1/1.2/1.5/2/2.5/3 mm |
| Material: Housing | Thermoplastic, black, UL 94V-0 |

| | |
|---|---|
| Line Switch | Rocker switch 2-pole, non-illuminated, IEC 61058-1<br>Technical details |

## Dimensions
Line switch

30 mm

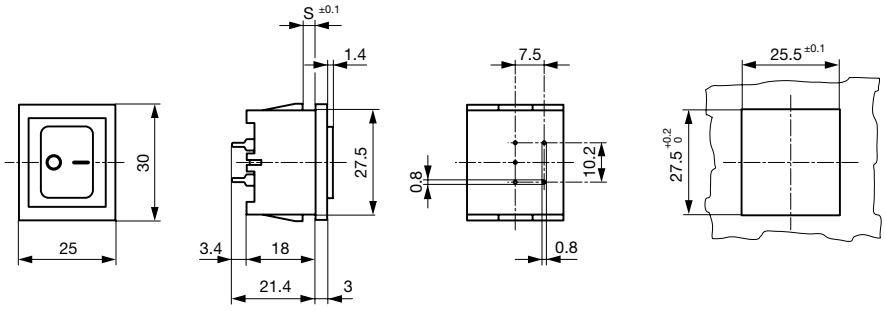


## Variants

| Type | Panel Thickness s [mm] | Line Switch | Fuseholder | Connectors | Connector | Order Number |
|---|---|---|---|---|---|---|
| Switch | 1 | 2-pole | - | - | - | 6050.5510 |
| Switch | 1.2 | 2-pole | - | - | - | 6050.5512 |
| Switch | 1.5 | 2-pole | - | - | - | 6050.5515 |
| Switch | 2 | 2-pole | - | - | - | 6050.5520 |
| Switch | 2.5 | 2-pole | - | - | - | 6050.5525 |
| Switch | 3 | 2-pole | - | - | - | 6050.5530 |

| | |
|---|---|
| **Packaging unit** | 50 Pcs |


SCHURTER ELECTRONIC COMPONENTS
The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments.