



# SAW Components

Data Sheet B9020





**SAW Components**

**B9020**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**




Chip sized SAW package DCS6T

**Features**

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Very low insertion loss
- Low amplitude ripple
- Usable passband 60 MHz
- Unbalanced to balanced operation
- Impedance transform from 50Ω to 150Ω
- Suitable for GPRS class 1 to 12
- Package for **Surface Mount Technology (SMT)**
- Pb-free

**Terminals**


- Ni, gold-plated

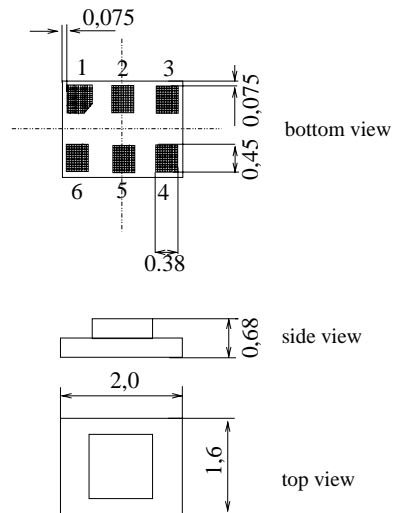

Dimensions in mm, approx. weight 0,007 g

**Pin configuration**

- 2 Input, unbalanced
- 4,6 Output, balanced
- 1,3,5 to be grounded

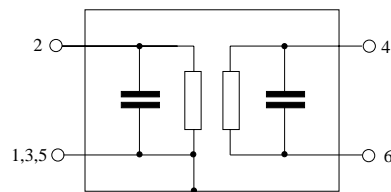

Type	Ordering code	Marking and Package according to	Packing according to
B9020	B39202-B9020-K310	C61157-A7-A128	F61074-V8152-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	- 30 / + 85	°C	Machine Model, 10 pulses  peak power of GSM signal, duty cycle 4:8
Storage temperature range	$T_{stg}$	- 40 / + 85	°C	
DC voltage	$V_{DC}$	5	V	
ESD voltage	$V_{DC}$	50*	V	
Input Power at				
GSM850, GSM900	$P_{IN}$	15	dBm	
GSM1800, GSM1900	$P_{IN}$	12	dBm	
Tx bands				

\* acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



**SAW Components**

**B9020**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**



**Characteristics**

Operating Temperature Range:  $T = 25^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 150\Omega \parallel 56\text{nH}$

		min.	typ.	max.	
<b>Center frequency</b>	$f_C$	—	1960,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\text{max}}$				
1930,0 ... 1990,0 MHz		—	1,8	2,4	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$				
1930,0 ... 1990,0 MHz		—	0,7	1,2	dB
<b>Input VSWR</b>					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
<b>Output VSWR</b>					
1930,0 ... 1990,0 MHz		—	1,8	2,0	
<b>Output phase balance (<math>\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}</math>)</b>					
1930,0 ... 1990,0 MHz		-4	—	5	$^{\circ}$
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>					
1930,0 ... 1990,0 MHz		-1,0	—	1,0	dB
<b>Differential to common mode suppression</b>	$S_{\text{sc}12}$				
1930,0 ... 1990,0 MHz		22,0	26,0	—	dB
<b>Attenuation</b>	$\alpha$				
DC ... 1510,0 MHz		40	43	—	dB
1510,0 ... 1830,0 MHz		30	35	—	dB
1830,0 ... 1850,0 MHz		28	30	—	dB
1850,0 ... 1890,0 MHz		23	30	—	dB
1890,0 ... 1910,0 MHz		13	14	—	dB
2010,0 ... 2070,0 MHz		13	15	—	dB
2070,0 ... 2400,0 MHz		25	26	—	dB
2400,0 ... 2500,0 MHz		35	42	—	dB
2500,0 ... 3860,0 MHz		28	34	—	dB
3860,0 ... 3980,0 MHz		45	52	—	dB
3980,0 ... 6000,0 MHz		40	52	—	dB



**SAW Components**

**B9020**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**



**Characteristics**

Operating Temperature Range:  $T = -10$  to  $+80^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 150\Omega \parallel 56\text{nH}$

			min.	typ.	max.	
<b>Center frequency</b>	$f_C$		—	1960,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$					
		1930,0 ... 1990,0 MHz	—	2,3	2,6	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$					
		1930,0 ... 1990,0 MHz	—	1,1	1,6	dB
<b>Input VSWR</b>						
		1930,0 ... 1990,0 MHz	—	1,9	2,1	
<b>Output VSWR</b>						
		1930,0 ... 1990,0 MHz	—	1,9	2,1	
<b>Output phase balance (<math>\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}</math>)</b>						
		1930,0 ... 1990,0 MHz	-4	—	5	$^{\circ}$
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>						
		1930,0 ... 1990,0 MHz	-1,0	—	1,5	dB
<b>Differential to common mode suppression</b>	$S_{\text{sc}12}$					
		1930,0 ... 1990,0 MHz	22,0	26,0	—	dB
<b>Attenuation</b>	$\alpha$					
		DC ... 1510,0 MHz	40	43	—	dB
		1510,0 ... 1830,0 MHz	30	35	—	dB
		1830,0 ... 1850,0 MHz	28	30	—	dB
		1850,0 ... 1890,0 MHz	23	30	—	dB
		1890,0 ... 1910,0 MHz	13	14	—	dB
		2010,0 ... 2070,0 MHz	13	15	—	dB
		2070,0 ... 2400,0 MHz	23	25	—	dB
		2400,0 ... 2500,0 MHz	35	42	—	dB
		2500,0 ... 3860,0 MHz	28	34	—	dB
		3860,0 ... 3980,0 MHz	45	52	—	dB
		3980,0 ... 6000,0 MHz	40	52	—	dB



**SAW Components**

**B9020**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

**Data Sheet**



**Characteristics**

Operating Temperature Range:  $T = -30$  to  $+85^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\Omega$  (unbalanced)  
 Terminating load impedance:  $Z_L = 150\Omega \parallel 56\text{nH}$

		min.	typ.	max.	
<b>Center frequency</b>	$f_C$	—	1960,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	—	2,4	2,9	dB
1930,0 ... 1990,0 MHz					
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	1,2	1,7	dB
1930,0 ... 1990,0 MHz					
<b>Input VSWR</b>		—	1,9	2,1	
1930,0 ... 1990,0 MHz					
<b>Output VSWR</b>		—	1,9	2,2	
1930,0 ... 1990,0 MHz					
<b>Output phase balance (<math>\phi(S_{31}) - \phi(S_{21}) + 180^{\circ}</math>)</b>		-4	—	5	°
1930,0 ... 1990,0 MHz					
<b>Output amplitude balance (<math> S_{31}/S_{21} </math>)</b>		-1,0	—	1,5	dB
1930,0 ... 1990,0 MHz					
<b>Differential to common mode suppression</b>	$S_{sc12}$	22,0	26,0	—	dB
1930,0 ... 1990,0 MHz					
<b>Attenuation</b>	$\alpha$				
DC ... 1510,0 MHz		40	43	—	dB
1510,0 ... 1830,0 MHz		30	35	—	
1830,0 ... 1850,0 MHz		28	30	—	dB
1850,0 ... 1890,0 MHz		23	30	—	
1890,0 ... 1910,0 MHz		12	14	—	dB
2010,0 ... 2070,0 MHz		10	12	—	
2070,0 ... 2400,0 MHz		22	24	—	dB
2400,0 ... 2500,0 MHz		35	42	—	
2500,0 ... 3860,0 MHz		28	34	—	dB
3860,0 ... 3980,0 MHz		45	52	—	
3980,0 ... 6000,0 MHz		40	52	—	dB



SAW Components

B9020


Low-Loss Filter for Mobile Communication

1960,0 MHz


Data Sheet



Transfer function (T=-10 to +80°C)(narrow band)

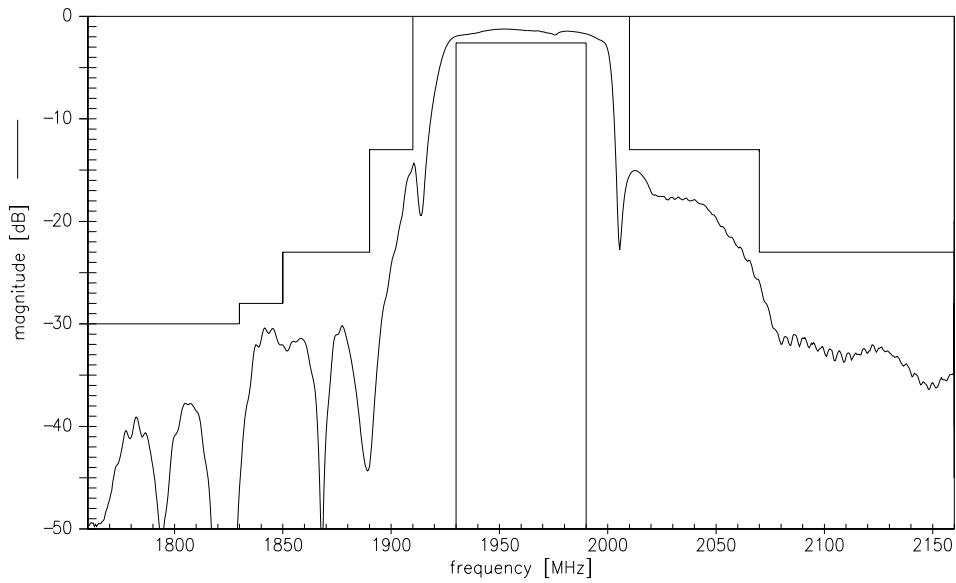

Transfer function (wide band)

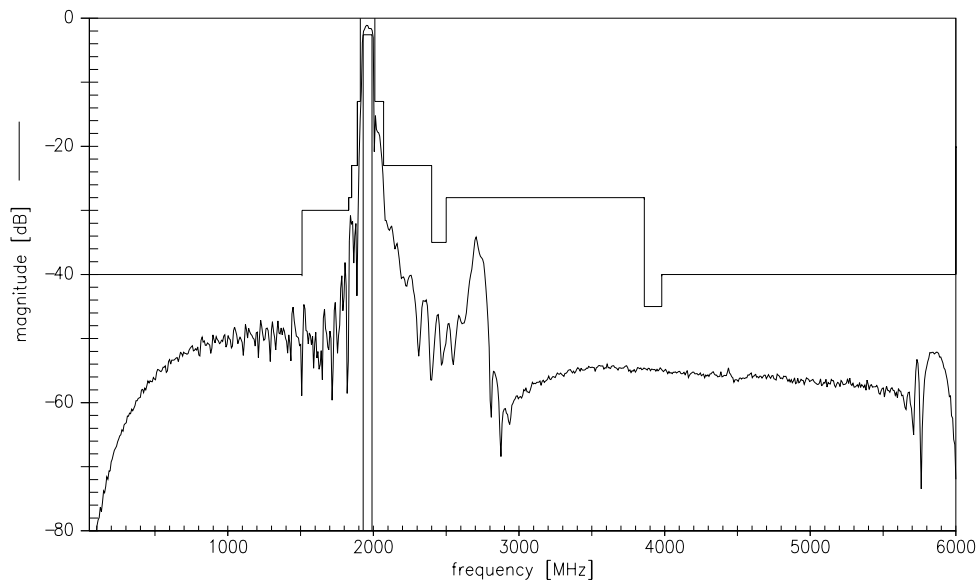



**SAW Components**

**B9020**

**Low-Loss Filter for Mobile Communication**

**1960,0 MHz**

Data Sheet



**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, SAW MC WT**  
**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.