

用于 SIM 卡接口并具有集成型 V_{CC} 箝位的 EMI 滤波器

查询样品: [TPD3F303](#)

特性

- 双向 EMI/RFI 滤波和具有集成 ESD 保护功能的线路终端
- 牢固可靠的 ESD 保护超过了 IEC 61000-4-2 (Level 4) 规格的要求
 - $\pm 15\text{-kV}$ 人体模型(HBM)
 - $\pm 15\text{-kV}$ IEC 61000-4-2 (接触放电)
 - $\pm 15\text{-kV}$ IEC 61000-4-2 (空气间隙放电)
- 击穿电压: 6V
- 低噪声 C-R-C 滤波器拓扑结构
- 集成型 V_{CC} 箝位免除了增设外部 ESD 保护的需要
- 采用节省空间的 DPV 封装 (0.5mm 间距)、DQD 封装 (0.4mm 间距)

应用

- 移动手机
- PDA
- 视频控制台
- 便携式计算机

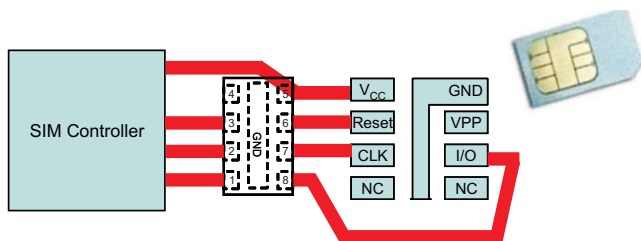
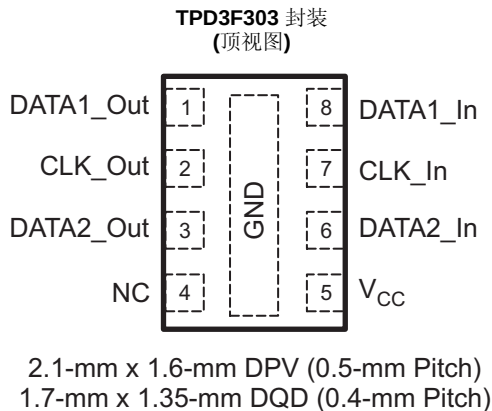


图 1. 在 SIM 卡接口上使用 TPD3F303 的电路板布局

说明/订购信息

TPD3F303 是一款用于 SIM 卡接口的三通道集成型 EMI 滤波器。该器件集成了一个 V_{CC} 箝位，用于在 V_{CC} 线路上提供系统级的 ESD 保护。在 CLK 线路上设有阻值为 47Ω 的终端电阻器，并在 DATA 和 RST 线路上采用了一个 100Ω 终端。

低通滤波器阵列降低了 EMI 辐射并提供了系统级的 ESD 保护。凭借其小外形封装及易用型引脚配置，TPD3F303 滤波器可适合广泛的应用，例如：移动手机、PDA、视频控制台、笔记本电脑等等。

TPD3F303 专为抑制那些容易遭受电磁干扰的系统中的 EMI/RFI 噪声而设计。该滤波器系列内置一个 ESD 保护电路，用于防止应用在遭受远远超过 IEC 61000-4-2 (Level 4) 规格值的 ESD 应力时受损。TPD3F303 的规定工作温度范围为 -40°C 至 85°C 。

订购信息

T_A	封装 ⁽¹⁾ ⁽²⁾		可订购的器件型号	顶端标记
-40°C 至 85°C	8 引脚 DPV 封装	卷带包装	TPD3F303DPVR	6SS
	8 引脚 DQD 封装	卷带包装	TPD3F303DQDR	6SS

(1) 封装图样、热数据和符号可登录 www.ti.com/package 获取。

(2) 如需了解最新的封装及订购信息，请参见本文件结尾处的“Package Option Addendum (封装选项附录)”，或登录 TI 的网站 www.ti.com.cn 进行查询。

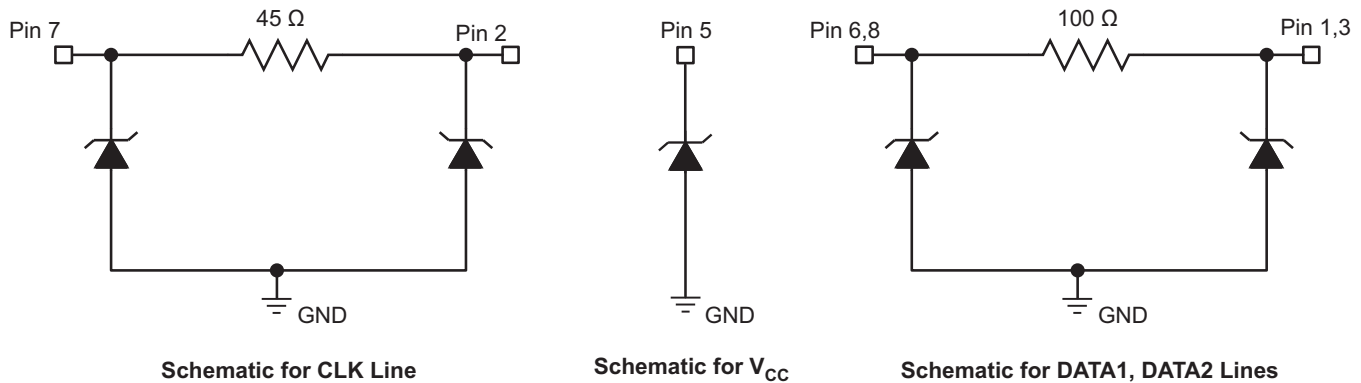


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

版权 © 2011, Texas Instruments Incorporated
English Data Sheet: [SLVSAM5](#)

CIRCUIT DIAGRAMS



TERMINAL FUNCTIONS

TERMINAL		TYPE	DESCRIPTION
NAME	DPV/DQD PIN NO.		
DATA _x _IN, DATA _x _OUT	1, 3, 6, 8	Input, Output Pins	Data and Rest signals Input, Output pins. The DATA1 and DATA2 are symmetric circuits. They can be used interchangeably for either DATA or RESET pins based off board layout scheme.
CLK_OUT, CLK_IN V	2, 7	Input, Output Pins	Clock Input and Output signals.
V _{CC}	5	Power Clamp	ESD Clamp circuit for the V _{CC} pin.
NC	4	No Connect	Not connected to any internal circuit. Leave this pin floating.
GND	Central ground Pad	Ground	Ground connection for the EMI filter. It is very important to connect the device GND to the printed circuit board ground plane through Vias directly under the package.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
	IO voltage tolerance		5.5	V
T _A	Operating free-air temperature range	-40	85	°C
T _{stg}	Storage temperature range	-55	155	°C
	IEC 61000-4-2 Contact Discharge		±15	KV
	IEC 61000-4-2 Air-gap Discharge		±15	KV
	Human Body Model ESD		±15	KV

- (1) Stresses beyond those listed under "ABSOLUTE MAXIMUM RATINGS" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum-rated conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

over operating free-air temperature range (unless otherwise noted)

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
V _{clamp}	Clamp voltage	I _{IO} = ±2 A	IO pin to ground				±10	V
I _I	Leakage current	R _{PU} = Open	IO pin to ground				0.1	µA
R _{CLK}	CLK series resistors				40	47	55	Ω
R _{DAT_RST}	Data/RST series resistors				85	100	115	Ω
C _{Total}	IO Capacitance	V _{IO} = 0 V	IO Pins to GND		16	20	24	pF
V _{BR}	Break-down Voltage	I _{IO} = 1 mA			6			V
F _{-3dB}	-3 dB BW for DATA/RESET line	Z _{SOURCE} = 50 Ω Z _{LOAD} = 50 Ω				294		MHz

ELECTRICAL CHARACTERISTICS (continued)

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
F _{-3dB}	–3 dB BW for CLK line	Z _{SOURCE} = 50 Ω Z _{LOAD} = 50 Ω		308		MHz

TYPICAL OPERATING CHARACTERISTICS

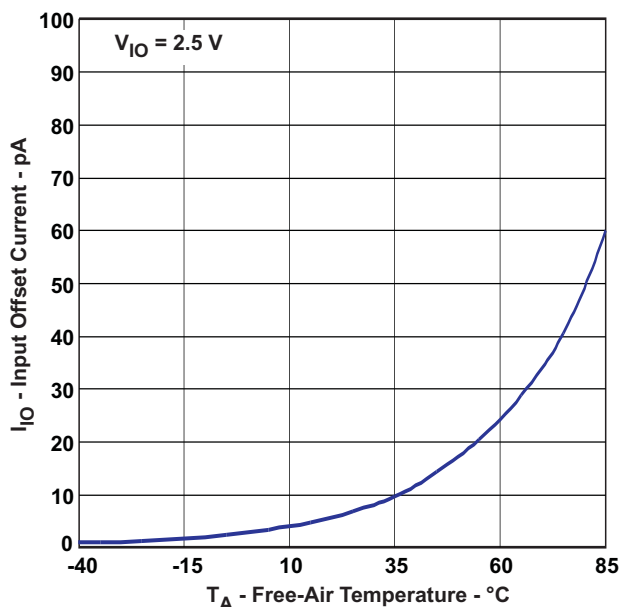
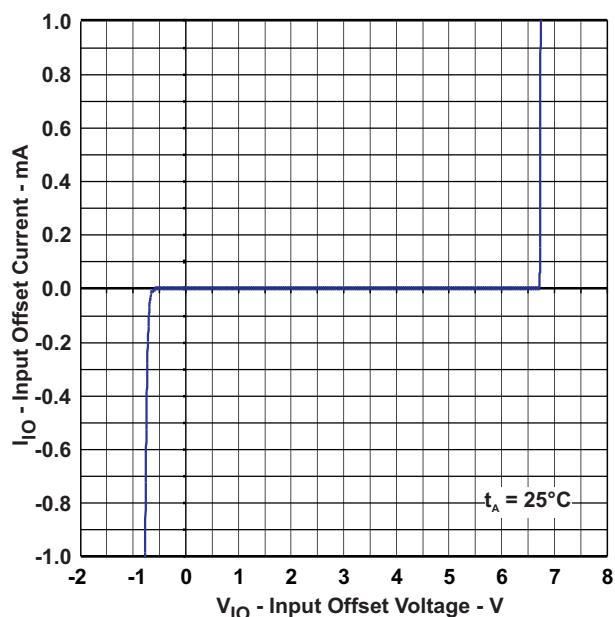
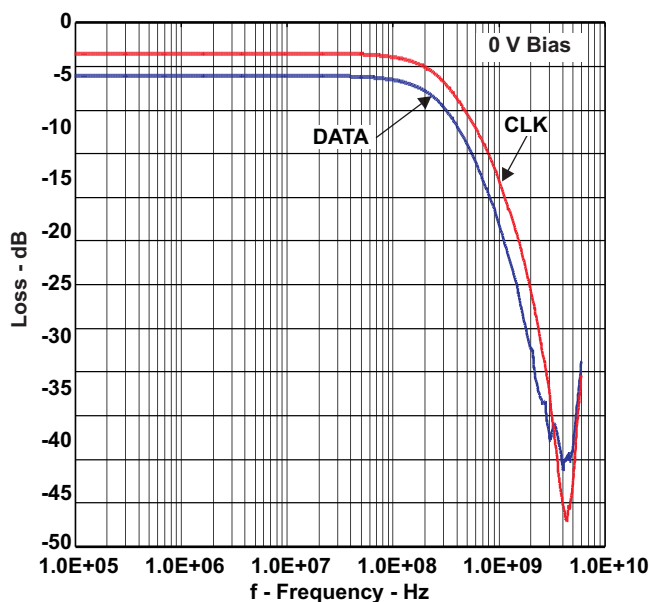
Figure 2. I_O vs Temperature, $V_{IO} = 2.5$ VFigure 3. I_O vs V_{IO} 

Figure 4. Frequency Response Data (0 V Bias)

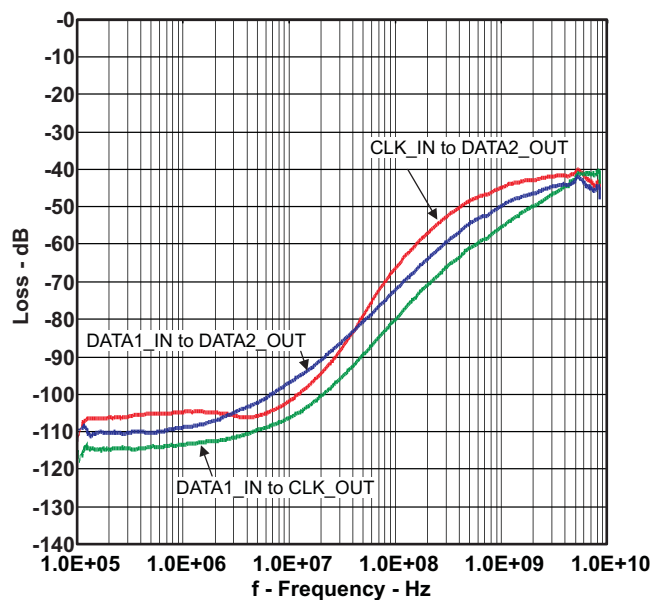


Figure 5. Channel-to-Channel Crosstalk

TYPICAL OPERATING CHARACTERISTICS (continued)

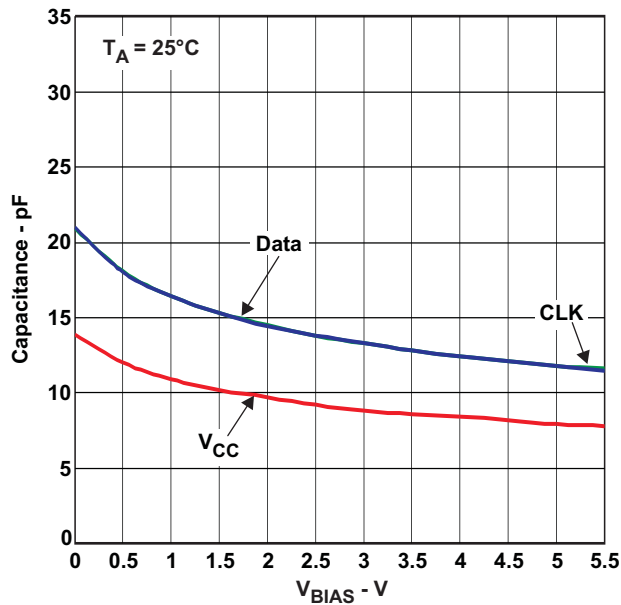


Figure 6. Capacitance vs V_{BIAS} , $t_A = 25^\circ\text{C}$

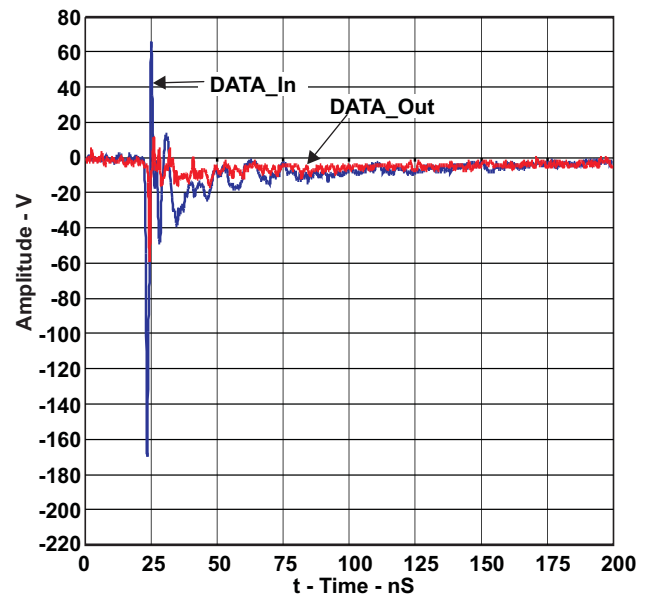


Figure 7. IEC Clamping Waveforms
–15 kV Contact, DATA1_In Stressed

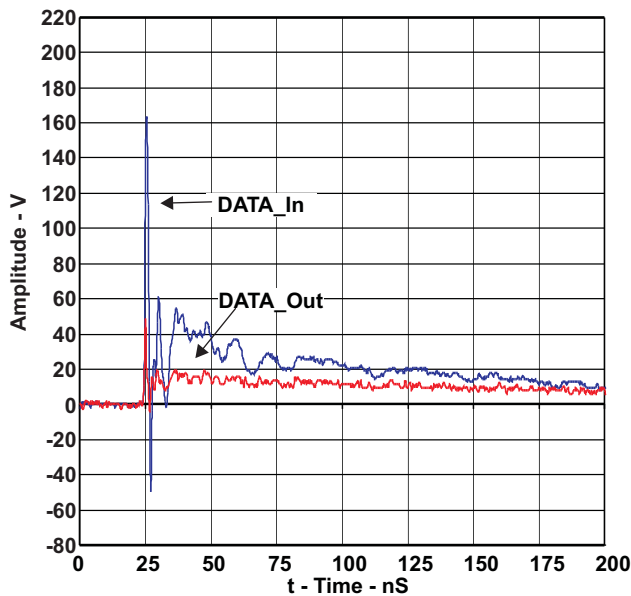


Figure 8. IEC Clamping Waveforms
+15 kV Contact, DATA1_In Stressed

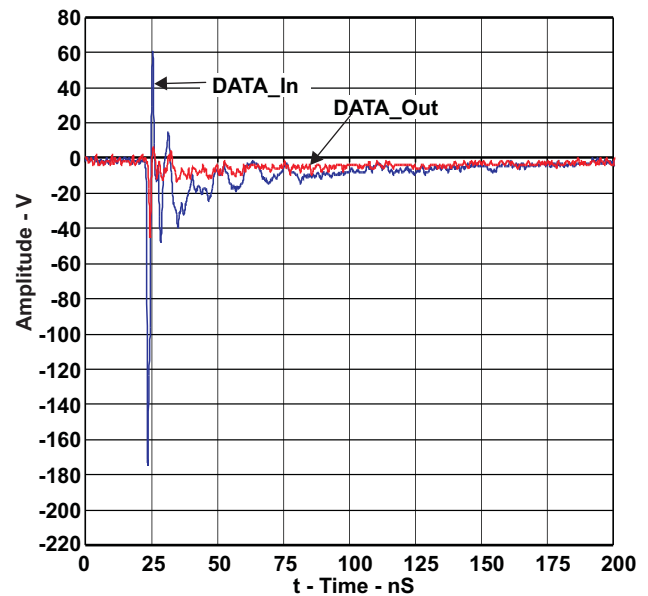


Figure 9. IEC Clamping Waveforms
–15 kV Contact, CLK_In Stressed

TYPICAL OPERATING CHARACTERISTICS (continued)

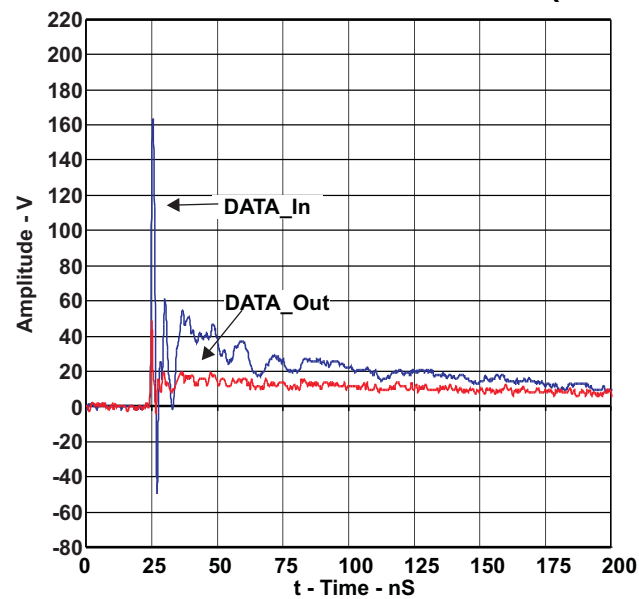


Figure 10. IEC Clamping Waveforms
+15 kV Contact, CLK_In Stressed

重要声明

德州仪器 (TI) 及其下属子公司有权在不事先通知的情况下, 随时对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权随时中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的 TI 销售条款与条件。

TI 保证其所销售的硬件产品的性能符合 TI 标准保修的适用规范。仅在 TI 保修的范围内, 且 TI 认为有必要时才会使用测试或其它质量控制技术。除非政府做出了硬性规定, 否则没有必要对每种产品的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用 TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何 TI 专利权、版权、屏蔽作品权或其它与使用了 TI 产品或服务的组合设备、机器、流程相关的 TI 知识产权中授予的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从 TI 获得使用这些产品或服务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是 TI 的专利权或其它知识产权方面的许可。

对于 TI 的数据手册或数据表, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况下才允许进行复制。在复制信息的过程中对内容的篡改属于非法的、欺诈性商业行为。TI 对此类篡改过的文件不承担任何责任。

在转售 TI 产品或服务时, 如果存在对产品或服务参数的虚假陈述, 则会失去相关 TI 产品或服务的明示或暗示授权, 且这是非法的、欺诈性商业行为。TI 对此类虚假陈述不承担任何责任。

可访问以下 URL 地址以获取有关其它 TI 产品和应用解决方案的信息:

产品

放大器	http://www.ti.com.cn/amplifiers
数据转换器	http://www.ti.com.cn/dataconverters
DSP	http://www.ti.com.cn/dsp
接口	http://www.ti.com.cn/interface
逻辑	http://www.ti.com.cn/logic
电源管理	http://www.ti.com.cn/power
微控制器	http://www.ti.com.cn/microcontrollers

应用

音频	http://www.ti.com.cn/audio
汽车	http://www.ti.com.cn/automotive
宽带	http://www.ti.com.cn/broadband
数字控制	http://www.ti.com.cn/control
光纤网络	http://www.ti.com.cn/opticalnetwork
安全	http://www.ti.com.cn/security
电话	http://www.ti.com.cn/telecom
视频与成像	http://www.ti.com.cn/video
无线	http://www.ti.com.cn/wireless

邮寄地址: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2006, Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
TPD3F303DPVR	ACTIVE	USON	DPV	8	3000	RoHS & Green	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	6SS	Samples
TPD3F303DQDR	ACTIVE	WSON	DQD	8	3000	RoHS & Green	NIPDAUAG	Level-1-260C-UNLIM	-40 to 85	6SS	Samples

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

RoHS Exempt: TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

⁽³⁾ MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

⁽⁴⁾ There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

⁽⁵⁾ Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

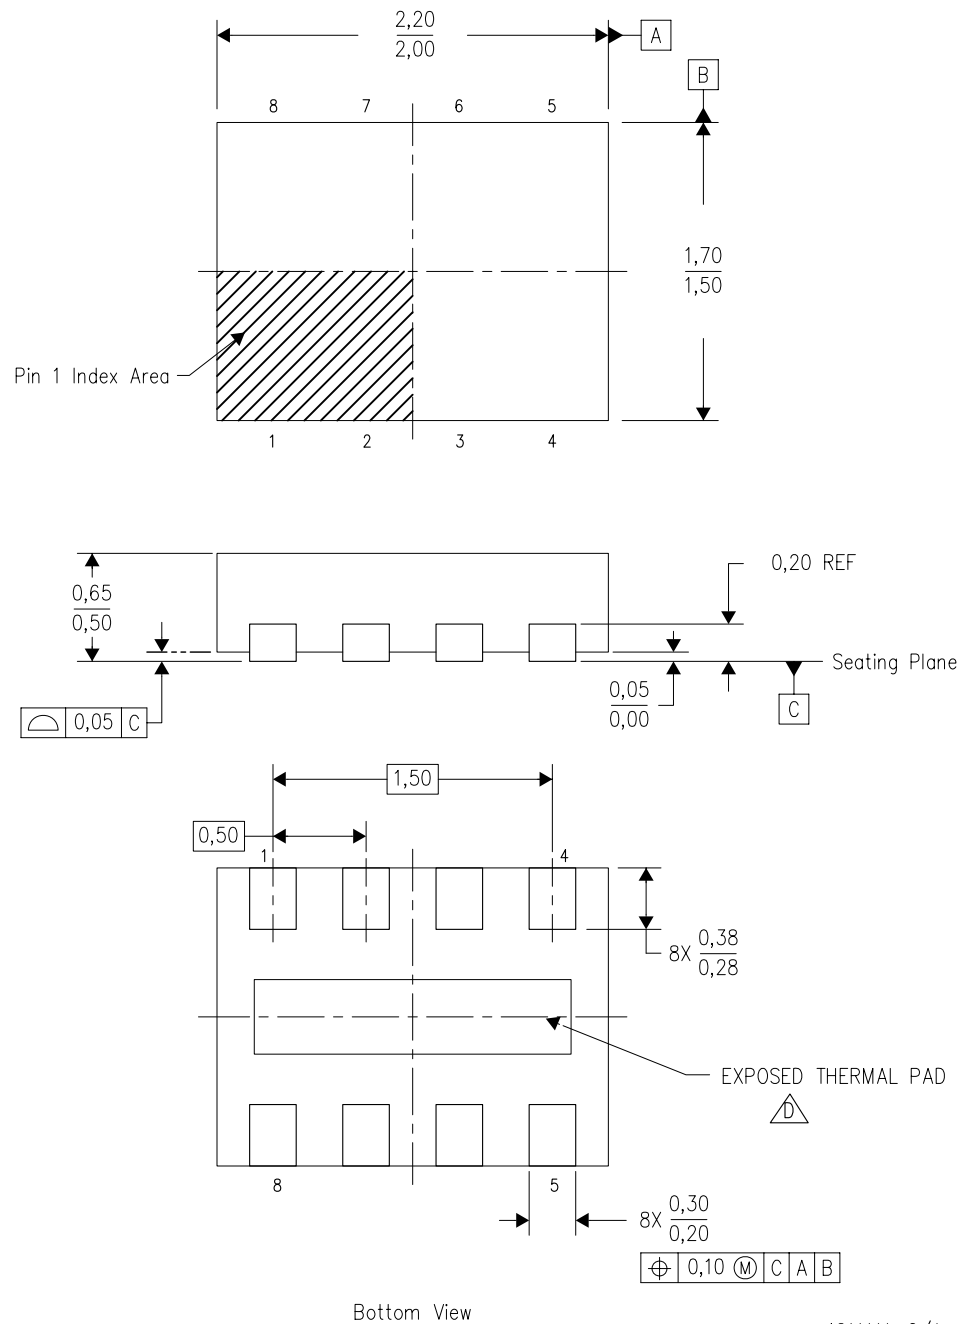
⁽⁶⁾ Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

DPV (R-PUSON-N8)

PLASTIC SMALL OUTLINE NO-LEAD



Bottom View

4211111-2/A 06/2010

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. SON (Small Outline No-Lead) package configuration.
 - The package thermal pad must be soldered to the board for thermal and mechanical performance.

DPV (R-PUSON-N8)

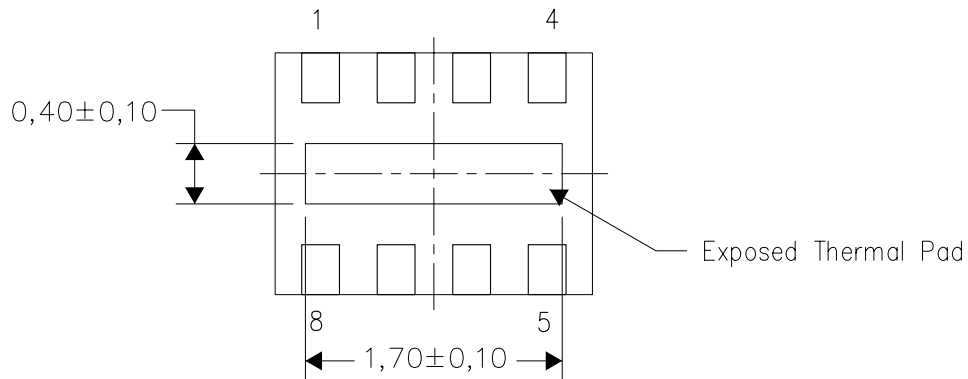
PLASTIC SMALL OUTLINE NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.



Bottom View

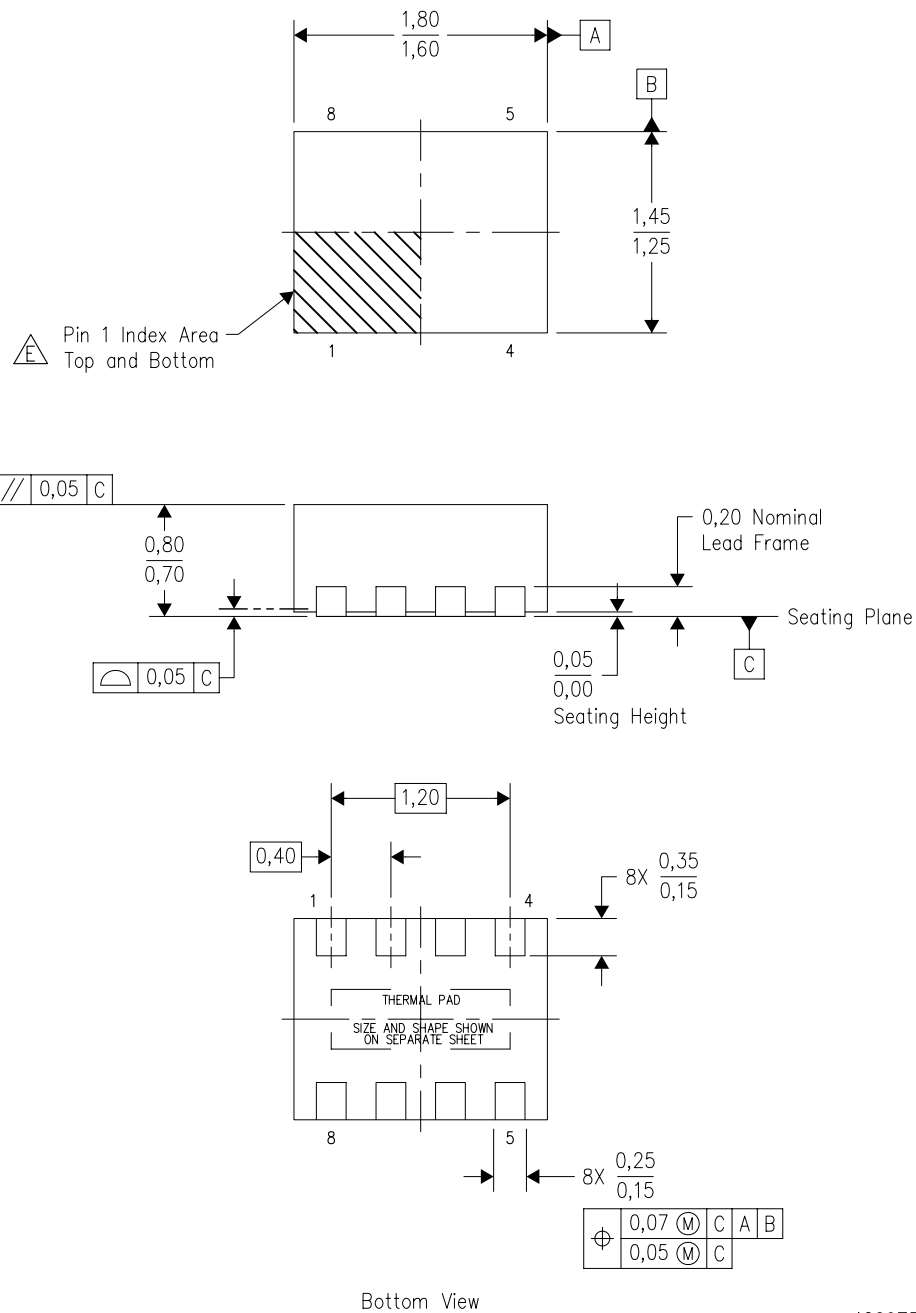
Exposed Thermal Pad Dimensions

4211680/A 04/11

NOTE: A. All linear dimensions are in millimeters

DQD (R-PWSON-N8)

PLASTIC SMALL OUTLINE NO-LEAD



Bottom View

4209732-2/C 12/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
 - B. This drawing is subject to change without notice.
 - C. SON (Small Outline No-Lead) package configuration.
 - D. The package thermal pad must be soldered to the board for thermal and mechanical performance.
 - E. See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- △** Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated. The Pin 1 identifiers are either a molded, marked, or metal feature.

DQD (R-PWSON-N8)

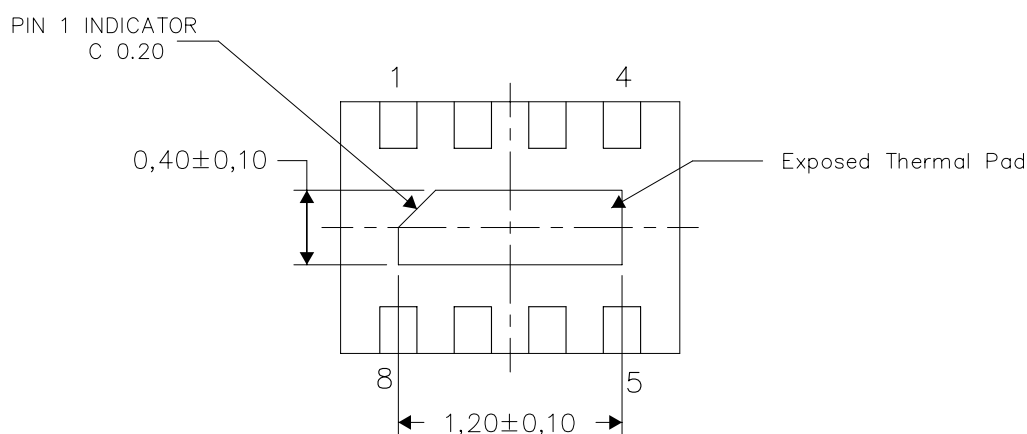
PLASTIC SMALL OUTLINE NO-LEAD

THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at www.ti.com.

The exposed thermal pad dimensions for this package are shown in the following illustration.



Bottom View

Exposed Thermal Pad Dimensions

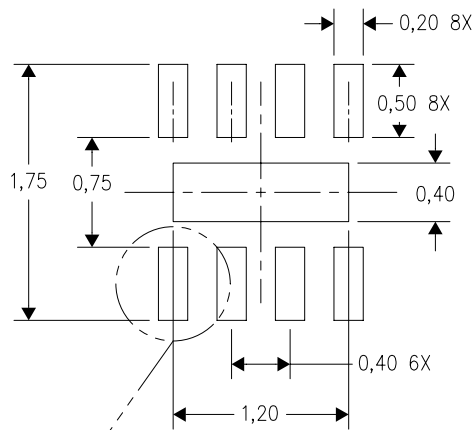
4209733-2/C 12/11

NOTE: All linear dimensions are in millimeters


DQD (R-PWSON-N8)

PLASTIC SMALL OUTLINE NO-LEAD

Land Pattern



Stencil Pattern

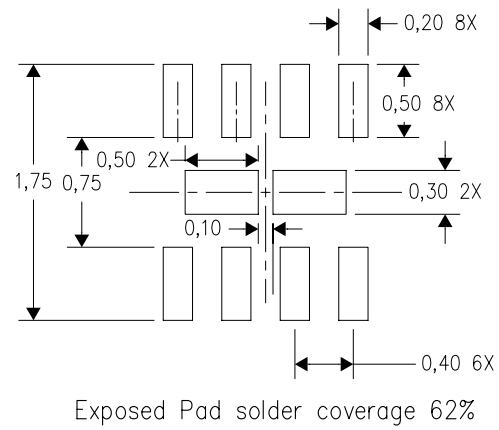

4211174-2/B 01/12

- NOTES:
- A. All linear dimensions are in millimeters.
 - B. This drawing is subject to change without notice.
 - C. Publication IPC-7351 is recommended for alternate designs.
 - D. Customers should contact their board fabrication site for minimum solder mask web tolerances between signal pads.
 - E. Maximum stencil thickness 0,1016 mm (4 mils). All linear dimensions are in millimeters.
 - F. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
 - G. Side aperture dimensions over-print land for acceptable area ratio > 0.66. Customer may reduce side aperture dimensions if stencil manufacturing process allows for sufficient release at smaller opening.

重要声明和免责声明

TI 提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款 (<https://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 或 [ti.com.cn](https://www.ti.com.cn) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2021 德州仪器半导体技术（上海）有限公司