

# New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.  
SPRINGFIELD, NEW JERSEY 07081  
U.S.A.


**BFW10**  
**BFW11**

TELEPHONE: (973) 376-2922  
(212) 227-6005  
FAX: (973) 376-8960

## MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Drain-Source Voltage	$V_{DS}$	30	Vdc
Drain-Gate Voltage	$V_{DG}$	30	Vdc
Reverse Gate-Source Voltage	$V_{GSR}$	-30	Vdc
Forward Gate Current	$I_{GF}$	10	mAdc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	300 1.71	mW mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{Stg}$	-65 to +150	$^\circ\text{C}$

TO-72 (TO-206A)




**JFET**  
**VHF/UHF AMPLIFIER**  
**N-CHANNEL - DEPLETION**

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
<b>OFF CHARACTERISTICS</b>					
Gate-Source Breakdown Voltage ( $I_G = 10 \mu\text{Adc}, V_{DS} = 0$ )	$V_{(BR)GSS}$	30	—	—	Vdc
Gate-Source Cutoff Voltage ( $V_{DS} = 15 \text{ Vdc}, I_D = 0.5 \text{ nAdc}$ )	$V_{GS(\text{off})}$	—	—	8 8	Vdc
Gate Reverse Current ( $V_{GS} = 20 \text{ Vdc}, V_{DS} = 0$ )	$I_{GSS}$	—	—	0.1	nAdc
Gate-Source Voltage ( $V_{DS} = 15 \text{ Vdc}, I_D = 400 \mu\text{Adc}$ )	$V_{GS}$	2	—	7.5	Vdc
Gate-Source Voltage ( $V_{DS} = 15 \text{ Vdc}, I_D = 50 \mu\text{Adc}$ )	$V_{GS}$	1.25	—	4	Vdc
<b>ON CHARACTERISTICS</b>					
Zero-Gate Voltage Drain Current ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0$ )	$I_{DSS}$	8 4	—	20 10	mAdc
<b>SMALL-SIGNAL CHARACTERISTICS</b>					
Forward Transadmittance ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0, f = 1 \text{ kHz}$ )	$Y_{fs}$	3.5 3.0	—	6.5 6.5	mmhos
Output Admittance ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0, f = 1.0 \text{ kHz}$ )	$Y_{os}$	— —	— —	85 50	$\mu\text{mhos}$
Input Capacitance ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0 \text{ Vdc}, f = 1.0 \text{ MHz}$ )	$C_{iss}$	—	—	6.0	pF
Reverse Transfer Capacitance ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0 \text{ Vdc}, f = 1.0 \text{ MHz}$ )	$C_{rss}$	—	—	0.8	pF
Forward Transadmittance ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0, f = 200 \text{ MHz}$ )	$Y_{fs}$	3.2	—	—	mmhos
Equivalent Noise Voltage ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0, f = 25 \text{ Hz}$ )	$a_n$	—	—	75	nV/V $\sqrt{\text{Hz}}$
Noise Figure ( $V_{DS} = 15 \text{ Vdc}, V_{GS} = 0 \text{ V, see Figures 1, 2, 3}$ )	NF	—	—	2.5	dB

FIGURE 1 – 100 MHz and 400 MHz NEUTRALIZED TEST CIRCUIT

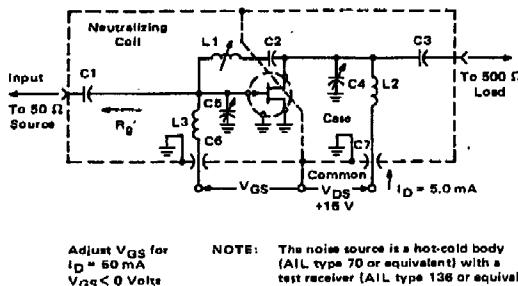

Reference Designation	VALUE	
	100 MHz	400 MHz
C1	7.0 pF	1.8 pF
C2	1000 pF	17 pF
C3	3.0 pF	1.0 pF
C4	1-12 pF	0.8-8.0 pF
C5	1-12 pF	0.8-8.0 pF
C6	0.0015 $\mu\text{F}$	0.001 $\mu\text{F}$
C7	0.0015 $\mu\text{F}$	0.001 $\mu\text{F}$
L1	3.0 $\mu\text{H}^*$	0.2 $\mu\text{H}^{**}$
L2	0.16 $\mu\text{H}^*$	0.03 $\mu\text{H}^{**}$
L3	0.14 $\mu\text{H}^*$	0.022 $\mu\text{H}^{**}$

- \*L1 17 turns, (approx. — depends upon circuit layout) AWG #28 enameled copper wire, close wound on 9/32" ceramic coil form. Tuning provided by a powdered iron slug.
- L2 4-1/2 turns, AWG #18 enameled copper wire, 5/16" long, 3/8" I.D. (AIR CORE).
- L3 3-1/2 turns, AWG #18 enameled copper wire, 1/4" long, 3/8" I.D. (AIR CORE).
- \*\*L1 6 turns, (approx. — depends upon circuit layout) AWG #24 enameled copper wire, close wound on 7/32" ceramic coil form. Tuning provided by an aluminum slug.
- L2 1 turn, AWG #16 enameled copper wire, 3/8" I.D. (AIR CORE).
- L3 1/2 turn, AWG #16 enameled copper wire, 1/4" I.D. (AIR CORE).

NJ Semi-Conductors reserves the right to change test conditions, parameters limits and package dimensions without notice information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

