

# Surface Mount Low Pass Filter

## LPF-B375+

50Ω DC to 375 MHz

### The Big Deal

- Good passband Insertion loss, 1 dB typical
- High rejection, 50 dB typical from 450-3000 MHz
- Fast roll-off
- Good VSWR, 1.3:1 typical in passband
- Miniature shielded package



CASE STYLE: HZ1198

### Product Overview

The LPF-B375+ is a lowpass filter in a shielded package (size of 0.472" x 0.826" x .22") fabricated using SMT technology. Covering DC-375 MHz band width, these units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. In addition it has repeatable performance across production lots and consistent performance across temperature.

### Key Features

Feature	Advantages
Low frequency and good passband Insertion loss, 1 dB typical	Low insertion loss will be used in designs optimized for high performance applications.
Fast roll-off	Fast roll-off, this will attenuate frequencies closer to the passband with good rejection value of 72 dB.
Good ultimate rejection	This enables the filters to attenuate spurious signals and reject harmonics for broadband frequency.
Good VSWR, 1.3:1 typical in passband	The model has very good return loss for this bandwidth and provides good interface when used with others devices.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Surface Mount Low Pass Filter

# LPF-B375+

50Ω DC to 375 MHz



CASE STYLE: HZ1198

## Features

- High rejection, 36 dB typical
- Sharp insertion loss roll-off
- Miniature shielded case
- Aqueous washable

## Applications

- Defence communications
- Transmitters / receivers
- Harmonic rejection

## Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC-375	—	1	2	dB
	Freq. Cut-Off	F2	395	—	3	—	dB
	VSWR	DC-F1	DC-375	—	1.3	1.6	:1
Stop Band	Rejection Loss	F3-F4	440-4500	20	34	—	dB
	VSWR	F3-F4	440-4500	—	23	—	:1

## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	1 W max.

Permanent damage may occur if any of these limits are exceeded.

## Functional Schematic



## Typical Frequency Response




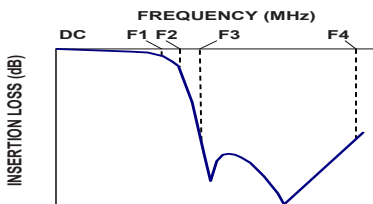


## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	0.02	1.01	1	2.19
5	0.04	1.01	5	2.23
50	0.11	1.04	10	2.18
160	0.26	1.19	50	2.20
250	0.34	1.12	75	2.22
300	0.43	1.11	100	2.28
350	0.63	1.02	150	2.39
375	0.98	1.28	200	2.61
394	1.89	1.62	225	2.79
400	3.50	2.81	250	3.03
405	6.14	5.10	275	3.35
412	11.42	10.50	300	3.78
425	22.72	19.54	310	4.00
440	36.24	25.19	320	4.26
650	53.46	59.91	330	4.59
1000	67.13	82.73	340	5.04
2000	62.97	64.35	350	5.62
3000	47.46	51.10	360	6.36
4000	42.88	40.41	370	7.32
4500	37.74	40.41	375	8.00

## +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

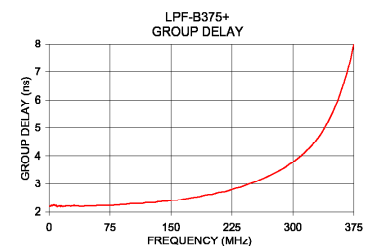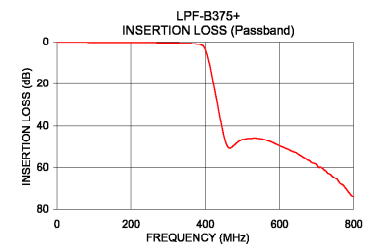

## Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



## Pad Connections

INPUT	1
OUTPUT	2
GROUND	3,4,5,6

**Demo Board MCL P/N: TB-400+**  
**Suggested PCB Layout (PL-247)**

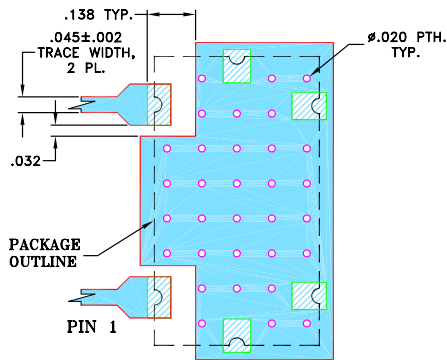


### NOTES:


- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025"±.002". COPPER: 1/2 OZ. EACH SIDE.  
 FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

## Outline Drawing

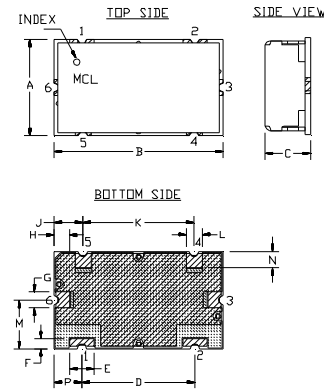

## PCB Land Pattern

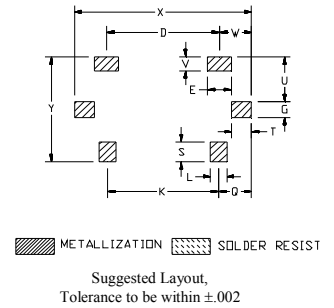

## Outline Dimensions ( inch / mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472	.826	.220	.561	.118	.047	.078	.076	.142	.543	.078	.236
11.99	20.98	5.59	14.00	3.00	1.19	1.98	1.93	3.61	13.79	1.98	5.99
N	P	Q	S	T	U	V	W	X	Y	wt	
.079	.138	.162	.098	.096	.217	.067	.157	.866	.512	grams	
2.01	3.51	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00	6.0	

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)