



size	ports		
	2	3	4
xx	16	24	32
A	13.00	26.00	39.00
B	$32.28^{+0.25}_{-0}$	$45.28^{+0.27}_{-0}$	$58.28^{+0.35}_{-0}$

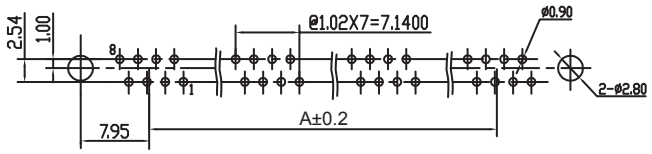

PCB LAYOUT - COMPONENT VIEW

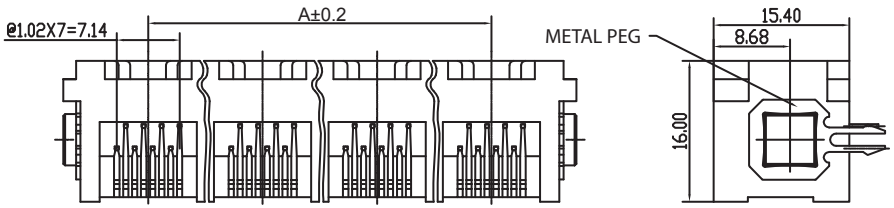

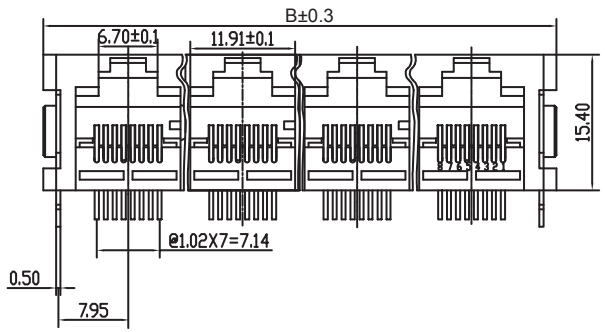



TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
FLAMMABILITY RATING: UL94-V0
COLOR: BLACK
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: GOLD
METAL PIN: BRASS NI PLATED
QUALITY CLASS: 500 MATING CYLCES

ENVIRONMENTAL
OPERATING TEMPERATURE: -40°C UP TO +85°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 1.5 A
WORKING VOLTAGE: 120 VAC
INSULATION RESISTANCE: >500 MΩ
WITHSTANDING VOLTAGE: 1000 VAC/min
CONTACT RESISTANCE: 20 mΩ max

STANDARD
CERTIFIED: E324776

SOLDERING
JEDEC LEAD FREE WAVE SOLDERING PROCESS

PACKAGING
TRAY

RoHS Compliant

REV	DATE	FILE	BY
G			
F			
E			
D			
C			
B	10-SEP-15	ADDITION TABLE	AK
A	23-JUL-14	PDF	AS

PROJECTION:

APPROVAL: JTs

GENERAL TOLERANCE
.X = +/- 0.3
.XX = +/- 0.20


UNIT: MM
SCALE:
SHEET: 1/3
DRAW: AS

WÜRTH ELEKTRONIK


DESCRIPTION: HORIZONTAL PLASTIC 8P8C ASSEMBLY MODULAR JACK TAB UP

WERI PART NO: 615 0xx 149 521

SIZE
A4

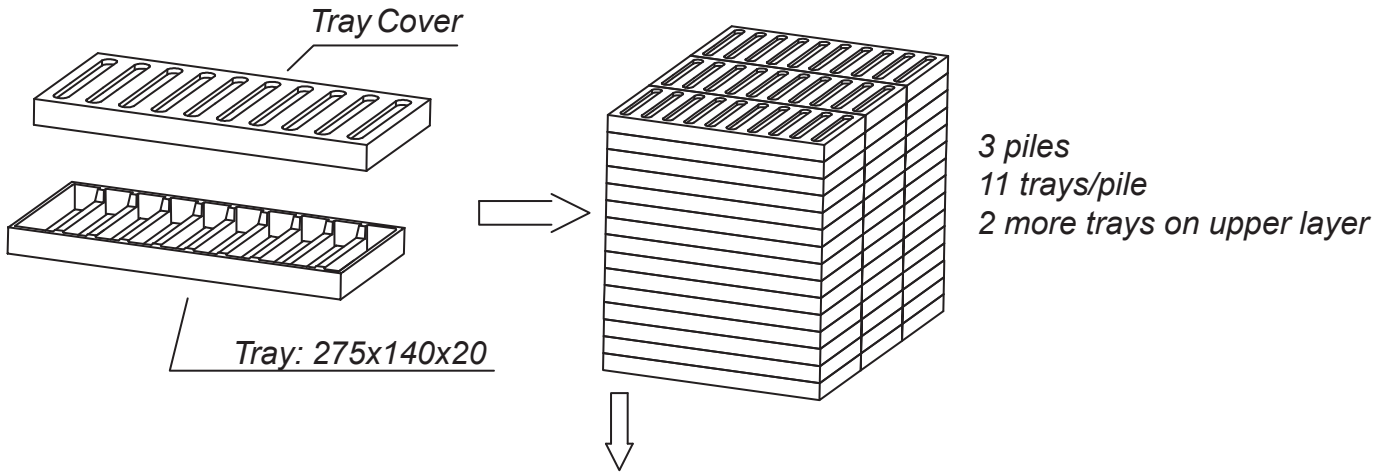

Carton size: 460x310x310
Waterproof bag size: 450x350x570

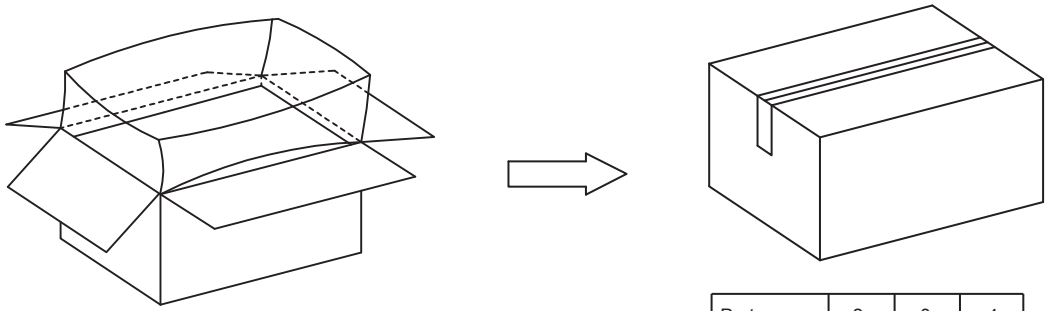

Ports	2	3	4
Pcs/Tray	40	20	20
Pcs/Carton	1400	700	700

RoHS Compliant

REV	DATE	FILE	BY
G			
F			
E			
D			
C			
B			
A	23-JUL-14	PDF	AS

PROJECTION:

GENERAL TOLERANCE
.X = +/- 0.2
.XX = +/- 0.15

APPROVAL: JTs

UNIT: MM
SCALE:
SHEET: 2/3
DRAW: AS

WÜRTH ELEKTRONIK

DESCRIPTION: HORIZONTAL PLASTIC 6P6C ASSEMBLY MODULAR JACK TAB UP

WERI PART NO: 615 0xx 149 521

SIZE **A4**

Cautions and Warnings:

This electronic component is designed and developed with the intention for use
in general electronics equipments.
Before incorporating the components into any equipments in the field such as aerospace, aviation,
nuclear control, submarine, transportation, (automotive control, train control, ship control),
transportation signal, disaster prevention, medical, public information network etc. where higher safety
and reliability are especially required or if there is possibility of direct damage or injury to human body,
Wurth Elektronik must be asked for a written approval.
In addition, even electronic component in general electronic equipments, when used in electrical circuits
that require high safety, reliability functions or performance, the sufficient reliability evaluation-check
for the safety must be performed before by the user before usage.

RoHS Compliant							
G				PROJECTION:	GENERAL TOLERANCE	WÜRTH ELEKTRONIK	
F					.X = +/- 0.2		
E					.XX = +/- 0.15		
D							
C				APPROVAL: JC	UNIT: MM	DESCRIPTION: DISCLAIMER	SIZE
B					SCALE:		A4
A	10-SEP-14	PDF	QL		SHEET: 3/3	WERI PART NO: DISCLAIMER	
REV	DATE	FILE	BY		DRAW: QL		