

## GENERAL DESCRIPTION

The CM431 is a three-terminal adjustable shunt voltage regulator with specified thermal stability and pin-to-pin compatible with the earlier 431 series. The output voltage can be adjusted to any value between  $V_{REF}$  and 36V by using two external resistors. The CM431 offers low output impedance for improved load regulation with a typical output impedance of 200m $\Omega$ . Because of the active output circuitry, the CM431 can replace the zener diodes in applications such as switching power supplies, OVP crowbar circuits, references for A/D, D/A converters with improved turn-on characteristics.

## FEATURES


- ◆ Initial voltage reference accuracy of 1.0%.
- ◆ Sink current capability from 1mA to 100mA
- ◆ Typical output dynamic impedance less than 200m $\Omega$ ;
- ◆ Adjustable output voltage from  $V_{REF}$  to 36V
- ◆ Available in SOT-23, SOT-89, TO-92, & SOP-8
- ◆ Low output noise
- ◆ Typical equivalent full range temperature coefficient of 30ppm/ $^{\circ}$ C

## APPLICATIONS


- ◆ Voltage Reference
- ◆ Precision shunt regulator
- ◆ High current shunt regulator
- ◆ PWM down converter with reference
- ◆ Voltage monitor

## PIN CONFIGURATION

TO-92  
Front View




SOT-23-3  
Top View




|       | CM431XCM233 | CM431XCM2R3 |
|-------|-------------|-------------|
| Pin 1 | REF         | CATHODE     |
| Pin 2 | CATHODE     | REF         |
| Pin 3 | ANODE       | ANODE       |

Suffix "X": Grade "A", "B", "C", or "D"


SOT-23-5  
Top View





SOT-89  
Top View



SOP-8  
Top View

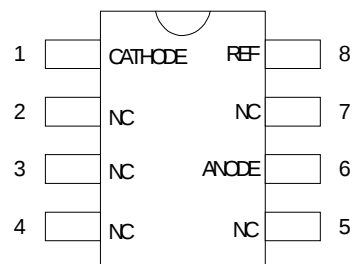

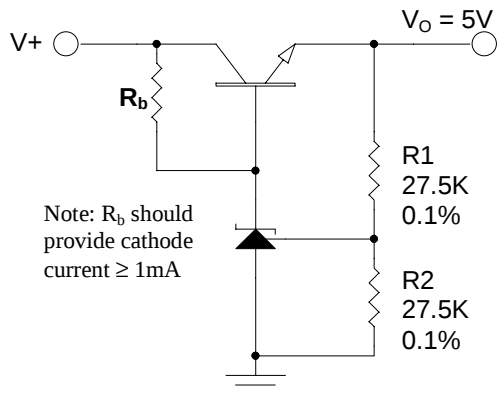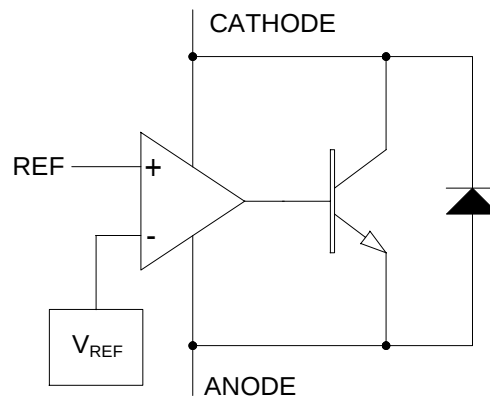**TYPICAL APPLICATION**

**5V Precision Regulator**
**BLOCK DIAGRAM**

**ORDERING INFORMATION**

| PACKAGE               | TOLERANCE   |             |             |              |
|-----------------------|-------------|-------------|-------------|--------------|
|                       | 0.5%        | 0.7%        | 1.0%        | T/R Quantity |
| SOT-23 <sup>(1)</sup> | CM431ACM233 | CM431DCM233 | CM431BCM233 | TR=3K        |
| SOT-23 <sup>(1)</sup> | CM431ACM2R3 | CM431DCM2R3 | CM431BCM2R3 | TR=3K        |
| SOT-89 <sup>(1)</sup> | CM431ACM89  | CM431DCM89  | CM431BCM89  | TR=1K        |
| TO-92 <sup>(2)</sup>  | CM431ACN    | CM431DCN    | CM431BCN    | TA=2K        |
| SOP-8                 | CM431ACS    | CM431DCS    | CM431BCS    |              |

Notes :

- (1) Add suffix "TR" for Tape & Reel.
- (2) Add suffix "TA" for Tape Ammo.

## ABSOLUTE MAXIMUM RATINGS

|                                                                                                                                                                                   |                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Cathode to Anode Voltage ( $V_{KA}$ ) (Note 2)                                                                                                                                    | -0.3V to 37V    |
| Continuous Cathode Current ( $I_K$ )                                                                                                                                              | -100mA to 150mA |
| Reference Input Current ( $I_{REF}$ )                                                                                                                                             | -50uA to 10mA   |
| Maximum junction temperature range, $T_J$                                                                                                                                         | 150°C           |
| Storage temperature range                                                                                                                                                         | -65°C to 150°C  |
| Lead temperature (soldering, 10 seconds)                                                                                                                                          | 260°C           |
| Note 1: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground.<br>Currents are positive into, negative out of the specified terminal. |                 |
| Note 2: Voltage values are with respect to the anode terminal unless otherwise noted.                                                                                             |                 |

## POWER DISSIPATION TABLE

| Package | $\theta_{JA}$<br>(°C/W) | Derating factor (mW/°C)<br>$T_A \geq 25^\circ\text{C}$ | $T_A \leq 25^\circ\text{C}$<br>Power rating(mW) | $T_A = 70^\circ\text{C}$<br>Power rating(mW) | $T_A = 85^\circ\text{C}$<br>Power rating (mW) |
|---------|-------------------------|--------------------------------------------------------|-------------------------------------------------|----------------------------------------------|-----------------------------------------------|
| SOP-8   | 165                     | 6.06                                                   | 757                                             | 485                                          | 394                                           |
| TO-92   | 156                     | 6.41                                                   | 801                                             | 513                                          | 417                                           |
| SOT-89  | 71(note)                | 14.1                                                   | 1763                                            | 1128                                         | 916                                           |
| SOT-23  | 285                     | 3.5                                                    | 438                                             | 280                                          | 228                                           |

Note :

- For SOT-89 package, Thermal Resistance-Junction to Tab ( $\theta_{JT}$ ) = 35°C/W.  $T_J = T_{TAB} + (P_D \times \theta_{JT})$
- $\theta_{JA}$ : Thermal Resistance-Junction to Ambient  
 Junction Temperature Calculation:  $T_J = T_A + (P_D \times \theta_{JA})$ .  
 The  $\theta_{JA}$  numbers are guidelines for the thermal performance of the device/PC-board system.  
 All of the above assume no ambient airflow.

## RECOMMENDED OPERATING CONDITIONS

|                                             | Min | Max | Units |
|---------------------------------------------|-----|-----|-------|
| Operating free air temperature range, $T_A$ | 0   | 105 | °C    |
| Cathode current, $I_K$                      | 1   | 100 | mA    |
| Cathode voltage, $V_{KA}$                   | 0   | 36  | V     |

## ELECTRICAL CHARACTERISTICS


Unless otherwise specified, these specifications apply over the operating ambient temperatures with  $T_A = 25^\circ\text{C}$ .

| Parameter                                 | Symbol     | Test Conditions                                                                       | CM431 |       |       | Units         |
|-------------------------------------------|------------|---------------------------------------------------------------------------------------|-------|-------|-------|---------------|
|                                           |            |                                                                                       | Min   | Typ   | Max   |               |
| Reference Input Voltage                   | $V_{REF}$  | $I_K = 10\text{mA}, V_{KA} = V_{REF}, 0.5\%$                                          | 2.482 | 2.495 | 2.507 | V             |
|                                           |            | $I_K = 10\text{mA}, V_{KA} = V_{REF}, 0.7\%$                                          | 2.478 | 2.495 | 2.512 | V             |
|                                           |            | $I_K = 10\text{mA}, V_{KA} = V_{REF}, 1.0\%$                                          | 2.470 | 2.495 | 2.520 | V             |
| Reference Drift                           |            | $I_K = 10\text{mA}, V_{KA} = V_{REF}, 0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ |       | 4     | 17    | mV            |
| Voltage Ratio, Ref to Cathode<br>(note 4) |            | $I_K = 10\text{mA}, V_{KA} = 2.5\text{V to } 36\text{V}$                              |       | -1.4  | -2.7  | mV/V          |
| Reference Input Current                   | $I_{REF}$  | $I_K = 10\text{mA}, V_{KA} = V_{REF}$                                                 |       | 2     | 4     | $\mu\text{A}$ |
|                                           |            | $I_K = 10\text{mA}, V_{KA} = V_{REF}, 0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$ |       |       | 2.3   |               |
| Minimum Operating Current                 | $I_{MIN}$  | $V_{KA} = V_{REF}$                                                                    |       | 0.4   | 1     | mA            |
| Off-State Cathode Current                 | $I_{OFF}$  | $V_{KA} = 36\text{V}, V_{REF} = 0\text{V}$                                            |       | 0.1   | 1     | $\mu\text{A}$ |
| Dynamic Impedance                         | $ Z_{KA} $ | $V_{KA} = V_{REF}, I_K = 1\text{mA to } 100\text{mA}, f \leq 1\text{kHz}$             |       | 0.2   | 0.5   | $\Omega$      |


Note 3: These parameters are guaranteed by design

Note 4:  $\frac{\Delta V_{REF}}{\Delta V_{KA}}$  Ratio of change in reference input voltage to the change in cathode voltage

## PARAMETER MEASUREMENT INFORMATION

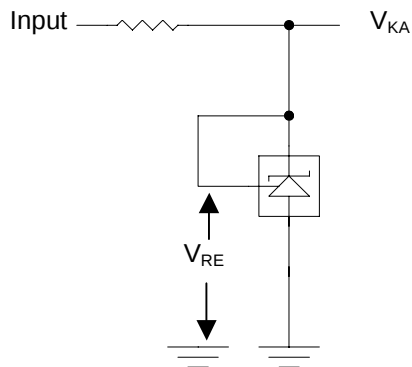


**Figure 1.** Test Circuit for  $V_{KA} = V_{REF}$

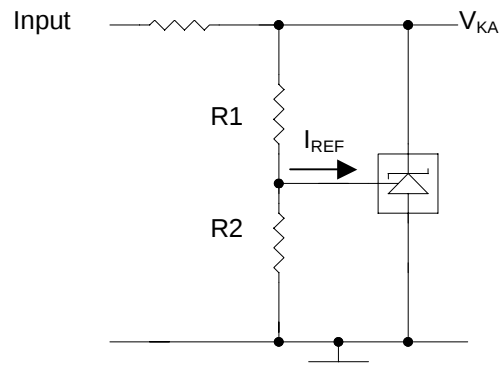

$$(1 + R1/R2) + I_{REF} \times R1$$


**Figure 2.** Test Circuit for  $V_{KA} > V_{REF}$

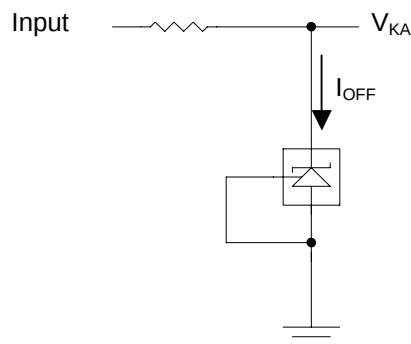


**Figure 3.** Test Circuit for  $I_{OFF}$

# TYPICAL CHARACTERISTICS


Cathode Current vs. Cathode Voltage

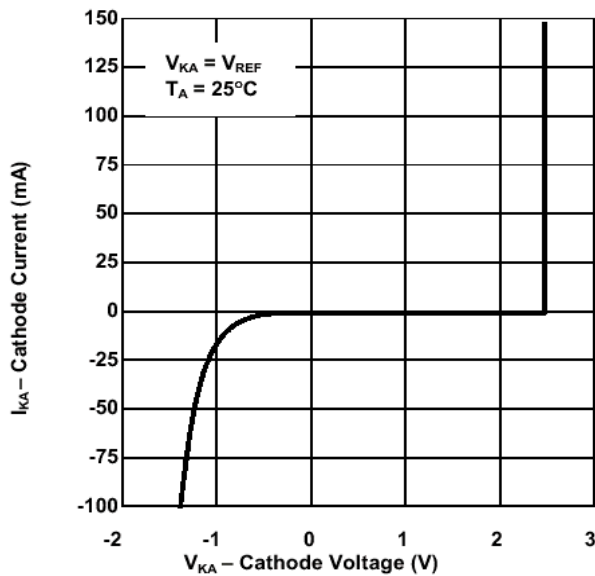


Cathode Current vs. Cathode Voltage

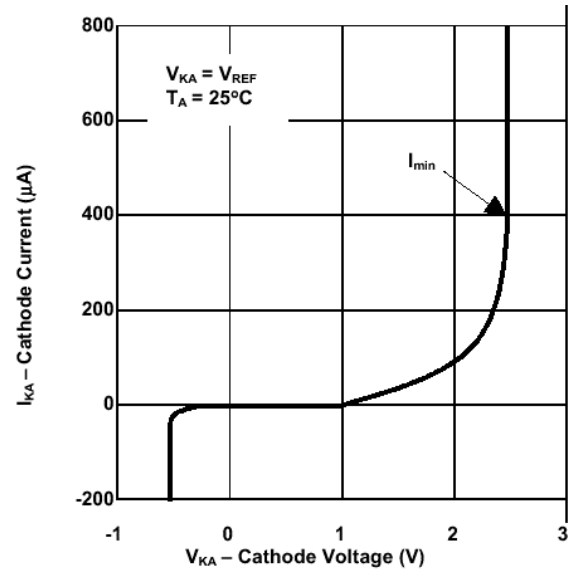


Ref. Input Voltage vs. Free-Air Temperature

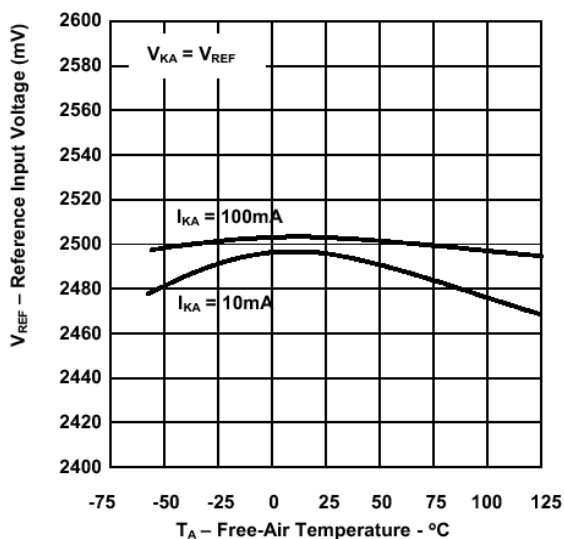



Ref. Input Current vs. Free-Air Temperature

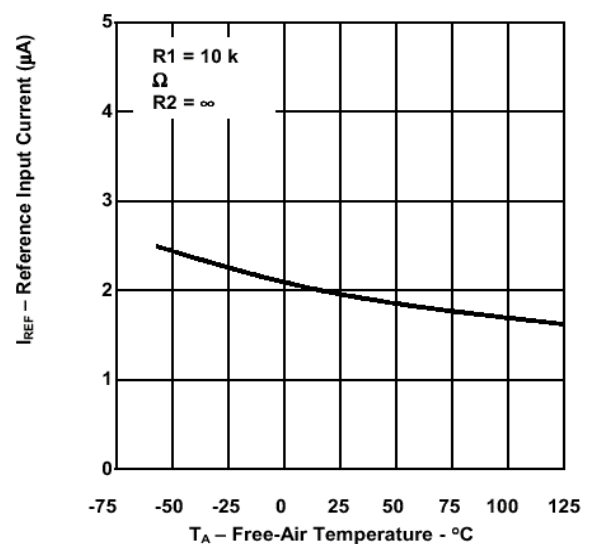

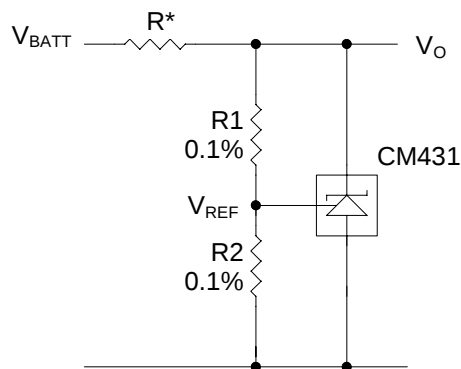
**APPLICATION INFORMATION**


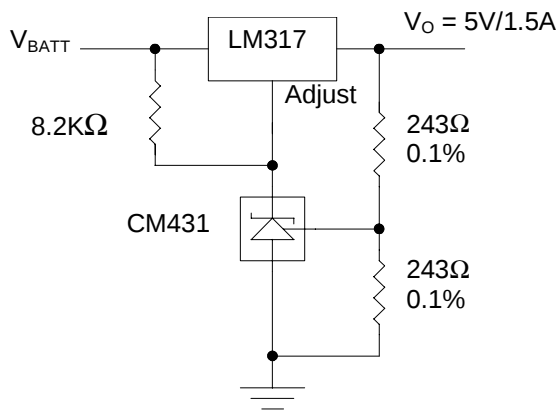
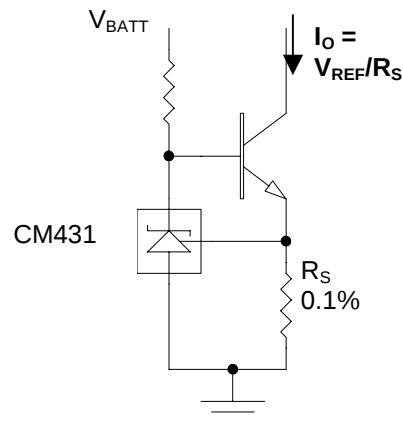
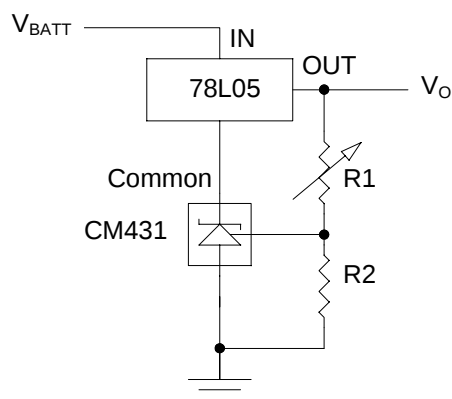
$$V_O = (1 + R1/R2) \times V_{REF}$$

Note: R should provide 1mA cathode current to the CM431 of minimum  $V_{BATT}$

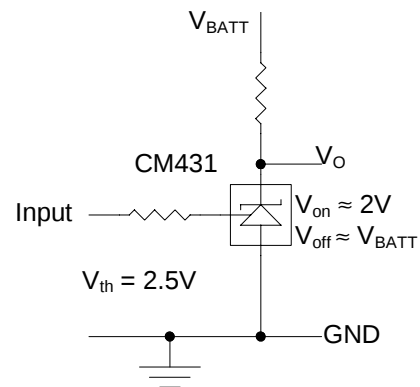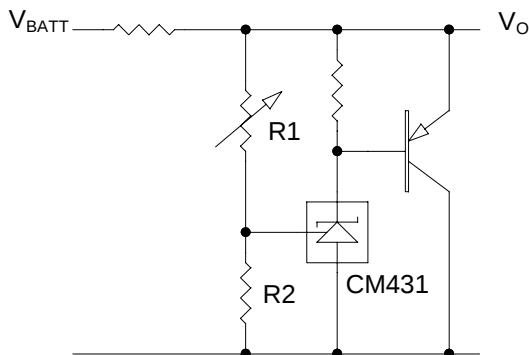**Figure 4. Shunt Regulator**

**Figure 5. Single –Supply Comparator With Temperature compensated threshold.**

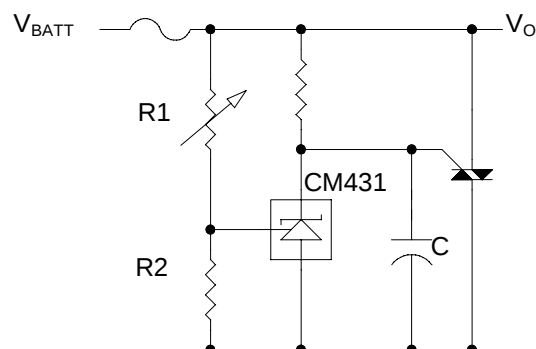
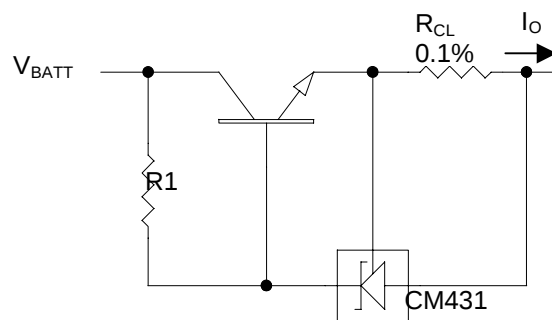
$$V_O = (1 + R1/R2) \times V_{REF}$$

**Figure 6. High-Current Shunt Regulator**

**Figure 7. Crowbar Circuit**

**APPLICATION INFORMATION (continued)**

**Figure 8.** Precision 5V, 1.5A Regulator

**Figure 9.** Precision Constant Current Sink


$$V_O = (1 + R1/R2) \times V_{REF}$$


$$\text{Min } V_O = V_{REF} + 5V$$

**Figure 10.** Output Control of a Three-Terminal Fixed Regulator


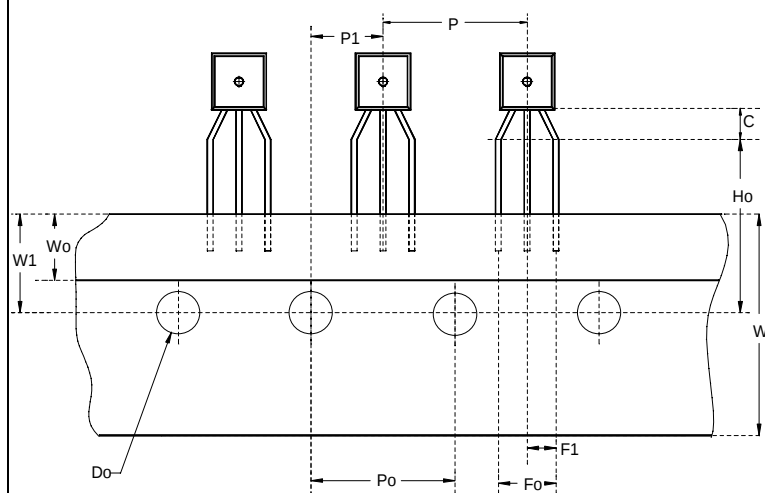
$$I_{OUT} = (V_{REF}/R_{CL}) + I_{KA}$$

$$R1 = V_{BATT}/((I_O/h_{FE}) + I_{KA})$$

**Figure 11.** Precision Current Limiter


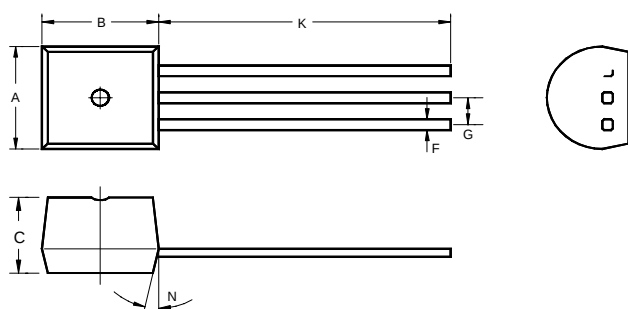
**3-Pin Plastic TO-92 Package Dimension**


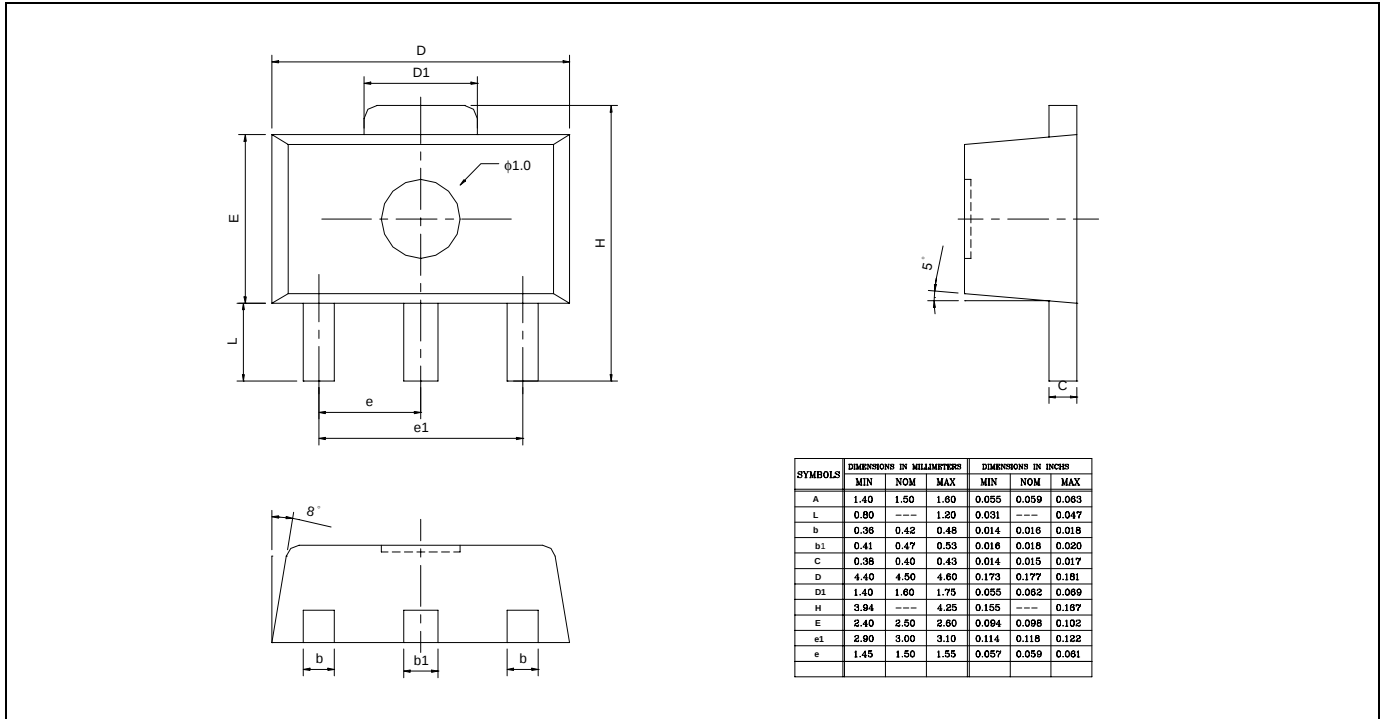
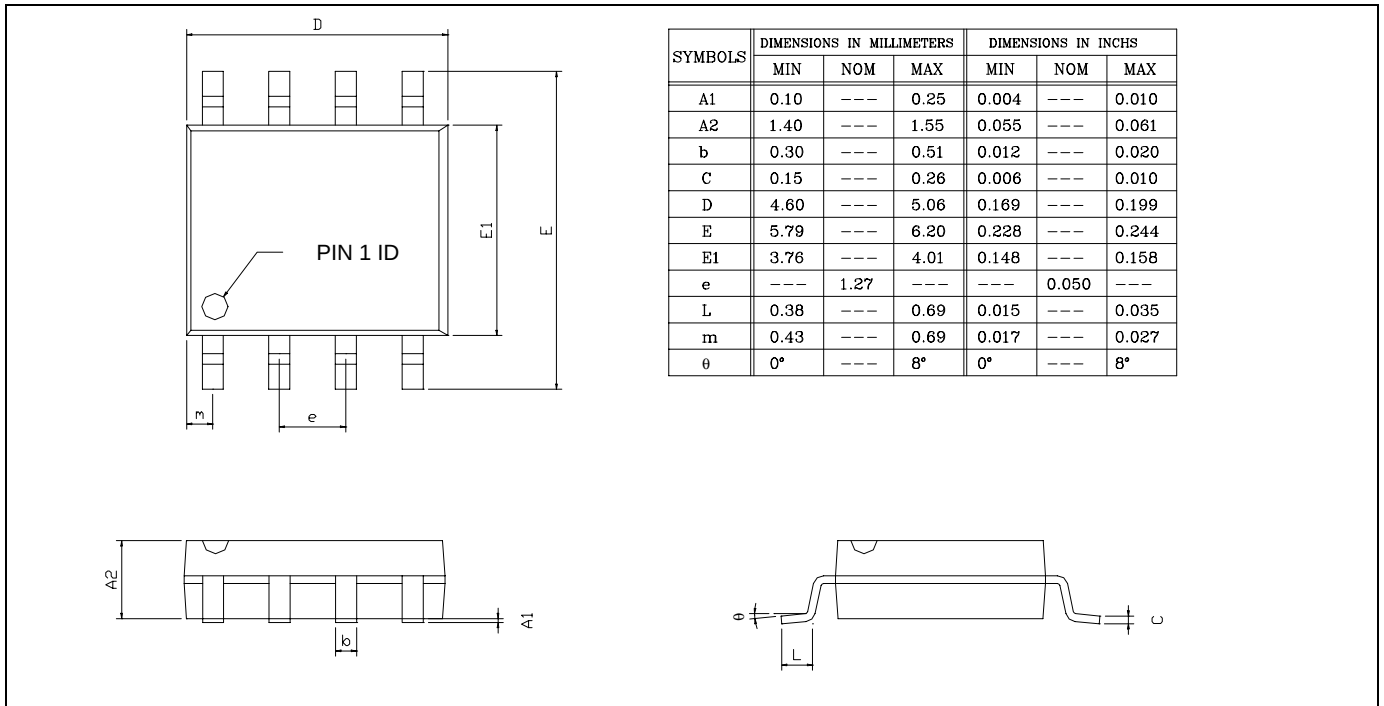
|   | INCHES |       |       | MILLIMETERS |       |      |
|---|--------|-------|-------|-------------|-------|------|
|   | MIN    | TYP   | MAX   | MIN         | TYP   | MAX  |
| A | 0.175  | 0.180 | 0.205 | 4.45        | 4.57  | 5.21 |
| B | 0.170  | 0.180 | 0.210 | 4.32        | 4.57  | 5.33 |
| C | 0.125  | 0.142 | 0.165 | 3.18        | 3.62  | 4.19 |
| F | -      | 0.015 | -     | -           | 0.38  | -    |
| G | -      | 0.050 | -     | -           | 1.27  | -    |
| J | -      | 0.150 | -     | -           | 3.81  | -    |
| K | 0.500  | 0.580 | -     | 12.70       | 14.73 | -    |
| M | -      | 5°    | -     | -           | 5°    | -    |
| N | -      | 5°    | -     | -           | 5°    | -    |

**3-Pin Plastic TO-92 Carrier Dimensions**


|    | INCHES |       |       | MILLIMETERS |      |      |
|----|--------|-------|-------|-------------|------|------|
|    | MIN    | TYP   | MAX   | MIN         | TYP  | MAX  |
| C  | 0.079  | -     | -     | 2.00        | -    | -    |
| P  | 0.480  | 0.500 | 0.520 | 12.2        | 12.7 | 13.2 |
| P0 | 0.488  | 0.500 | 0.512 | 12.4        | 12.7 | 13.0 |
| D0 | 0.150  | 0.157 | 0.165 | 3.8         | 4.0  | 4.2  |
| P1 | 0.230  | 0.250 | 0.256 | 5.85        | 6.35 | 6.85 |
| F0 | 0.165  | 0.197 | 0.220 | 4.2         | 5.0  | 5.6  |
| W  | 0.669  | 0.709 | 0.748 | 17.0        | 18.0 | 19.0 |
| Ho | 0.610  | 0.630 | 0.649 | 15.5        | 16.0 | 16.5 |
| W0 | 0.224  | 0.236 | 0.248 | 5.7         | 6.0  | 6.3  |
| W1 | 0.335  | 0.354 | 0.374 | 8.5         | 9.0  | 9.5  |

**Note: For TO-92, 2,500 units per ammo**

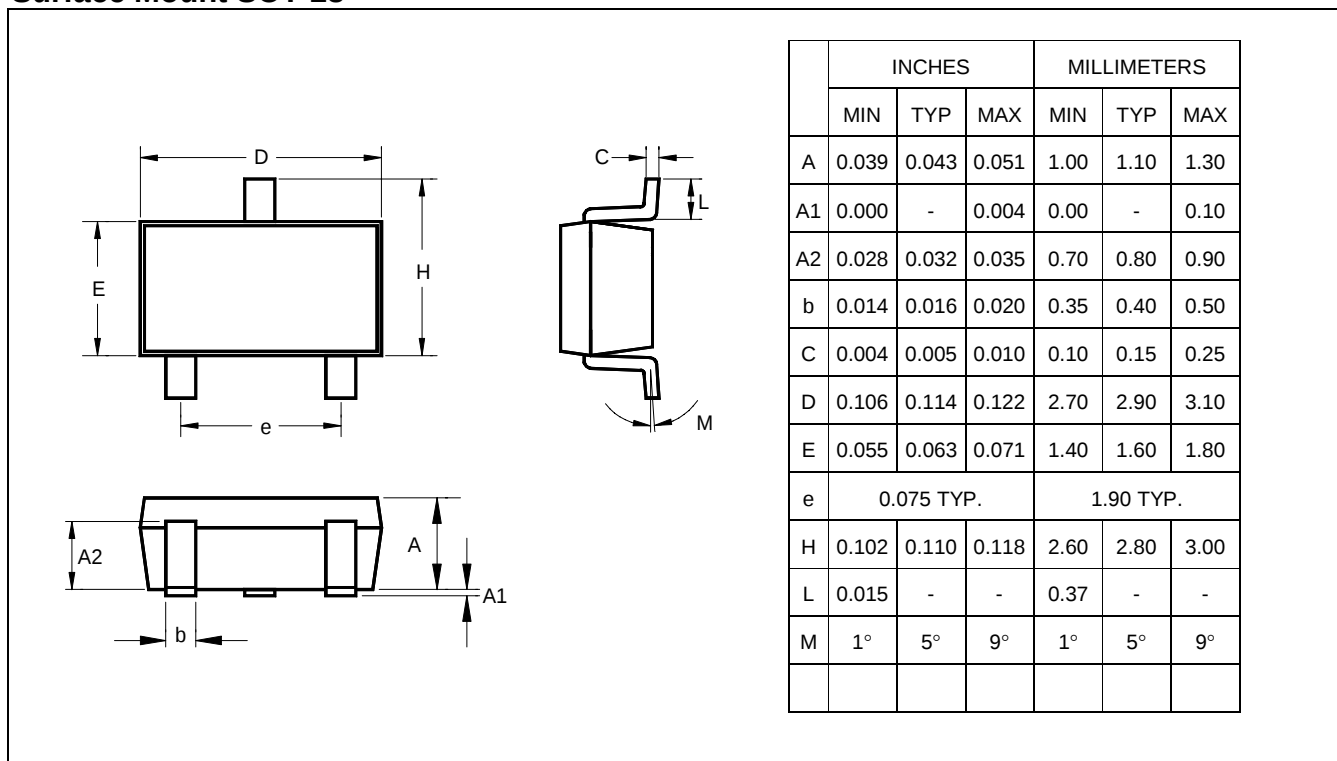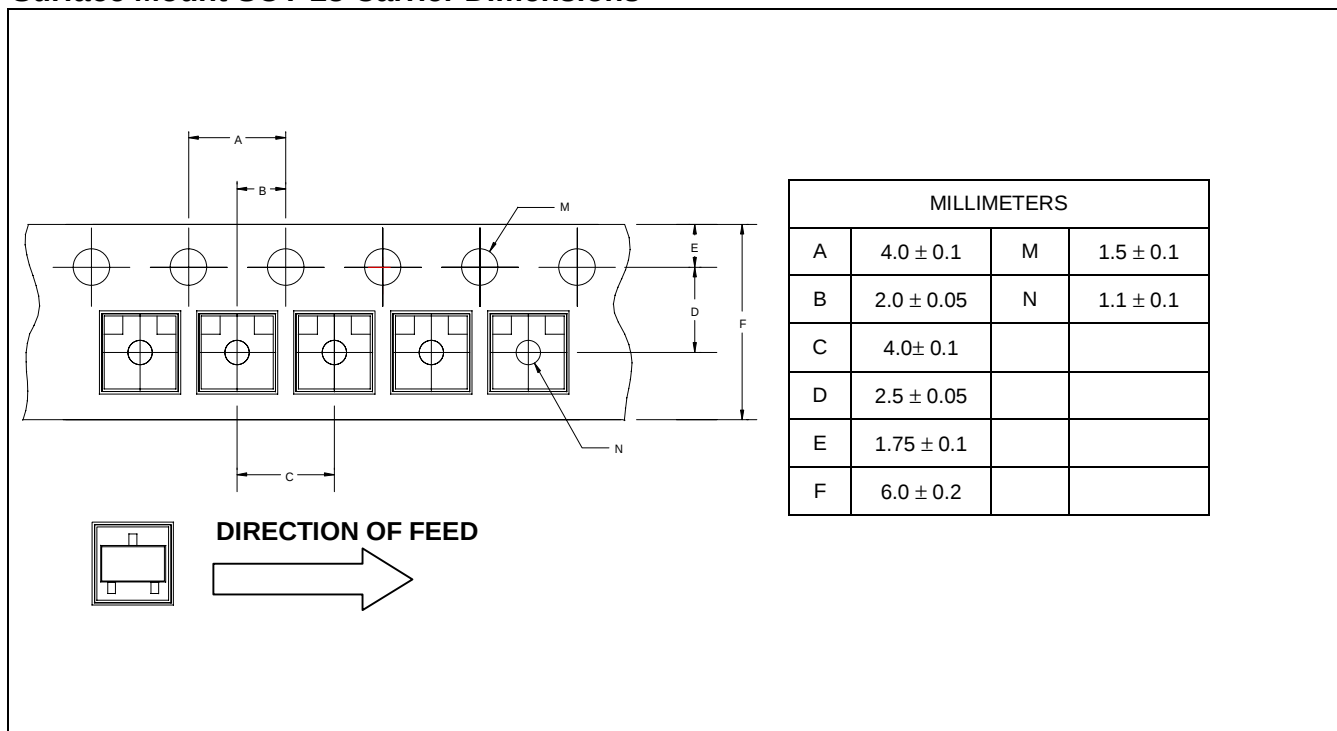**Surface Mount SOT-23**

**Surface Mount SOT-23 Carrier Dimensions**


**SOT-89 Package Dimension**

**8-Pin Plastic S.O.I.C.**




### **IMPORTANT NOTICE**

Champion Microelectronic Corporation (CMC) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. CMC integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of CMC products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

---

**HsinChu Headquarter**

5F, No. 11, Park Avenue II,  
Science-Based Industrial Park,  
HsinChu City, Taiwan  
TEL : +886-3-5679979  
FAX : +886-3-5679909

---

**Sales & Marketing**

11F, No. 306-3, Sec. 1, Ta Tung Rd.,  
Hsichih, Taipei Hsien 221  
Taiwan, R.O.C.  
TEL : +886-2-86921591  
FAX : +886-2-86921596

---