The RF Line


NPN Silicon RF Power Transistor

. . . designed primarily for wideband large–signal driver and predriver amplifier stages in 200–500 MHz frequency range.

- Guaranteed Performance at 400 MHz, 28 Vdc
  Output Power = 10 Watts
  Power Gain = 12 dB Min
  Efficiency = 50% Min
- 100% Tested for Load Mismatch at all Phase Angles with 30:1 VSWR
- Gold Metallization System for High Reliability
- Computer–Controlled Wirebonding Gives Consistent Input Impedance

MRF321

10 W, 400 MHz RF POWER TRANSISTOR NPN SILICON



CASE 244–04, STYLE 1

MAXIMUM RATINGS

Rating	Symbol	Value	Unit
Collector–Emitter Voltage	V_{CEO}	33	Vdc
Collector–Base Voltage	V_{CBO}	60	Vdc
Emitter–Base Voltage	V_{EBO}	4.0	Vdc
Collector Current — Continuous — Peak	I_C	1.1 1.5	Adc
Total Device Dissipation @ T_A = 25°C (1) Derate above 25°C	P_D	27 160	Watts mW/°C
Storage Temperature Range	T_{stg}	–65 to +150	°C

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	6.4	°C/W

ELECTRICAL CHARACTERISTICS (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
OFF CHARACTERISTICS					
Collector–Emitter Breakdown Voltage (I_C = 20 mAdc, I_B = 0)	$V_{(BR)CEO}$	33	—	—	Vdc
Collector–Emitter Breakdown Voltage (I_C = 20 mAdc, V_{BE} = 0)	$V_{(BR)CES}$	60	—	—	Vdc
Collector–Base Breakdown Voltage (I_C = 20 mAdc, I_E = 0)	$V_{(BR)CBO}$	60	—	—	Vdc
Emitter–Base Breakdown Voltage (I_E = 2.0 mAdc, I_C = 0)	$V_{(BR)EBO}$	4.0	—	—	Vdc
Collector Cutoff Current (V_{CB} = 30 Vdc, I_E = 0)	I_{CBO}	—	—	1.0	mAdc
ON CHARACTERISTICS					
DC Current Gain (I_C = 500 mA, V_{CE} = 5.0 Vdc)	h_{FE}	20	—	80	—


NOTE: (continued)

1. This device is designed for RF operation. The total device dissipation rating applies only when the device is operated as an RF amplifier.

© Motorola, Inc. 1994

ELECTRICAL CHARACTERISTICS — continued (T_C = 25°C unless otherwise noted.)

Characteristic	Symbol	Min	Typ	Max	Unit
DYNAMIC CHARACTERISTICS					
Output Capacitance (V_{CB} = 28 Vdc, I_E = 0, f = 1.0 MHz)	C_{ob}	—	10	12	pF
FUNCTIONAL TESTS (Figure 1)					
Common–Emitter Amplifier Power Gain (V_{CC} = 28 Vdc, P_{out} = 10 W, f = 400 MHz)	G_{PE}	12	13	—	dB
Collector Efficiency (V_{CC} = 28 Vdc, P_{out} = 10 W, f = 400 MHz)	η	50	60	—	%
Load Mismatch (V_{CC} = 28 Vdc, P_{out} = 10 W, f = 400 MHz, VSWR = 30:1 all phase angles)	ψ	No Degradation in Output Power			

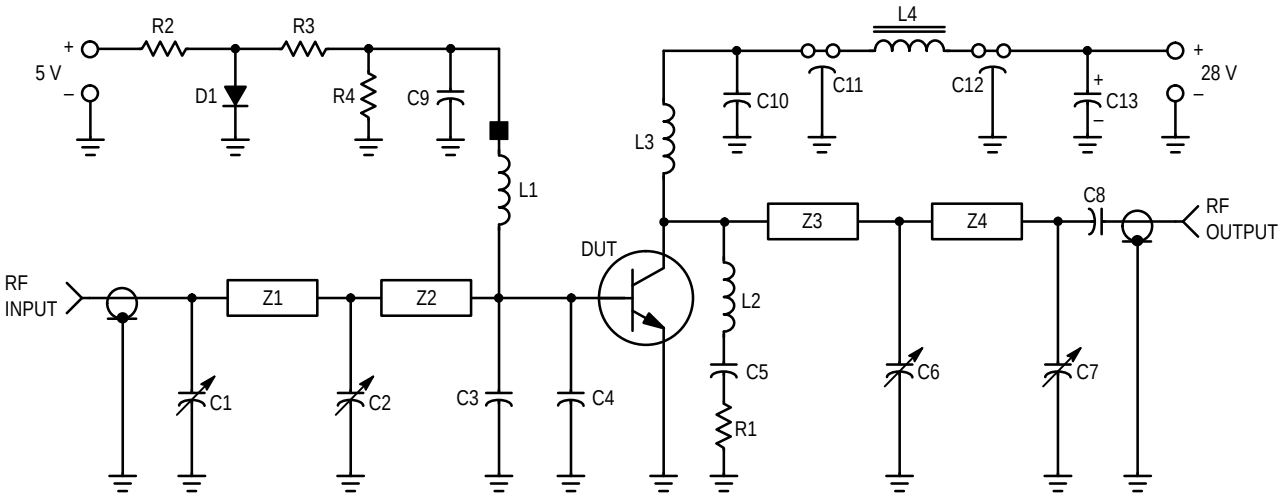

C1, C2, C3 — 1.0–20 pF Johanson Trimmer (JMC 5501)
C3, C4 — 47 pF ATC Chip Capacitor
C5, C10 — 0.1 μF Erie Redcap
C7 — 0.5–10 pF Johanson Trimmer (JMC 5201)
C8 — 0.018 μF Vitramon Chip Capacitor
C9 — 200 pF UNELCO Capacitor
C11, C12 — 680 pF Feedthru
C13 — 1.0 μF, 50 Volt Tantalum Capacitor

D1 — 1N4001

L1 — 0.33 μH Molded Choke with Ferroxcube Bead (Ferroxcube 56–590–65/4B) on Ground End of Coil
L2 — 4 Turns #20 Enamel, 1/8″ ID
L3 — 6 Turns #20 Enamel, 1/4″ ID
L4 — Ferroxcube VK200–19/4B

R1 — 5.1 Ω, 1/4 Watt
R2 — 120 Ω, 1.0 Watt
R3 — 20 Ω, 1/2 Watt
R4 — 47 Ω, 1/2 Watt

Z1 — Microstrip 0.1″ W x 1.35″ L
Z2 — Microstrip 0.1″ W x 0.55″ L
Z3 — Microstrip 0.1″ W x 0.8″ L
Z4 — Microstrip 0.1″ W x 1.75″ L

Board — Glass Teflon, ε_R = 2.56, t = 0.062″

Input/Output Connectors — Type N

Figure 1. 400 MHz Test Circuit Schematic

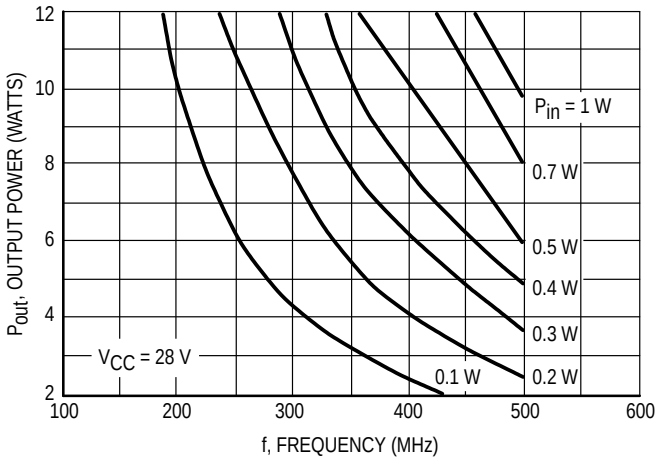


Figure 2. Output Power versus Frequency

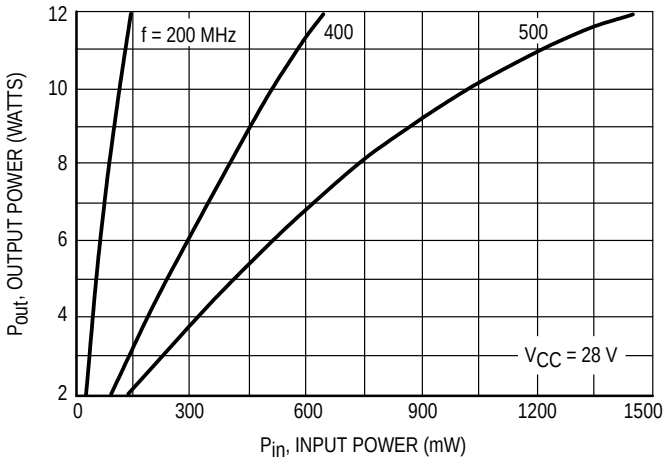


Figure 3. Output Power versus Input Power

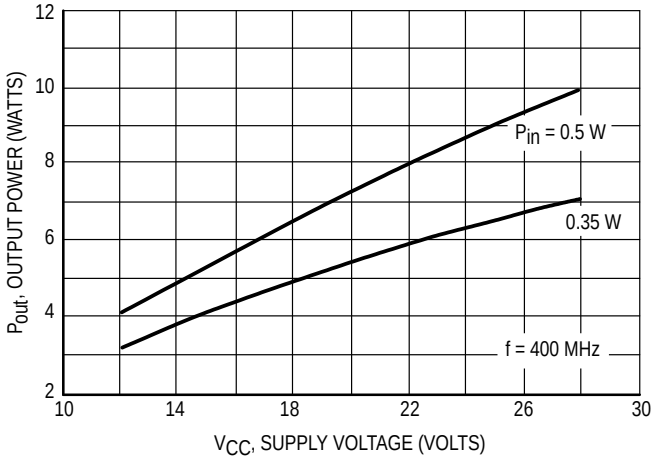


Figure 4. Output Power versus Supply Voltage


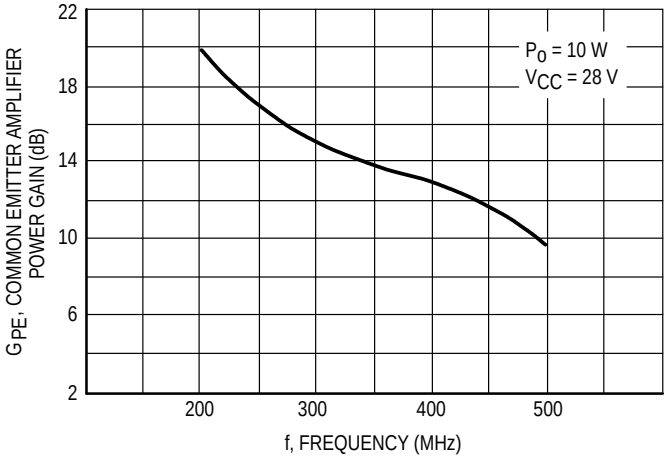


Figure 5. Power Gain versus Frequency

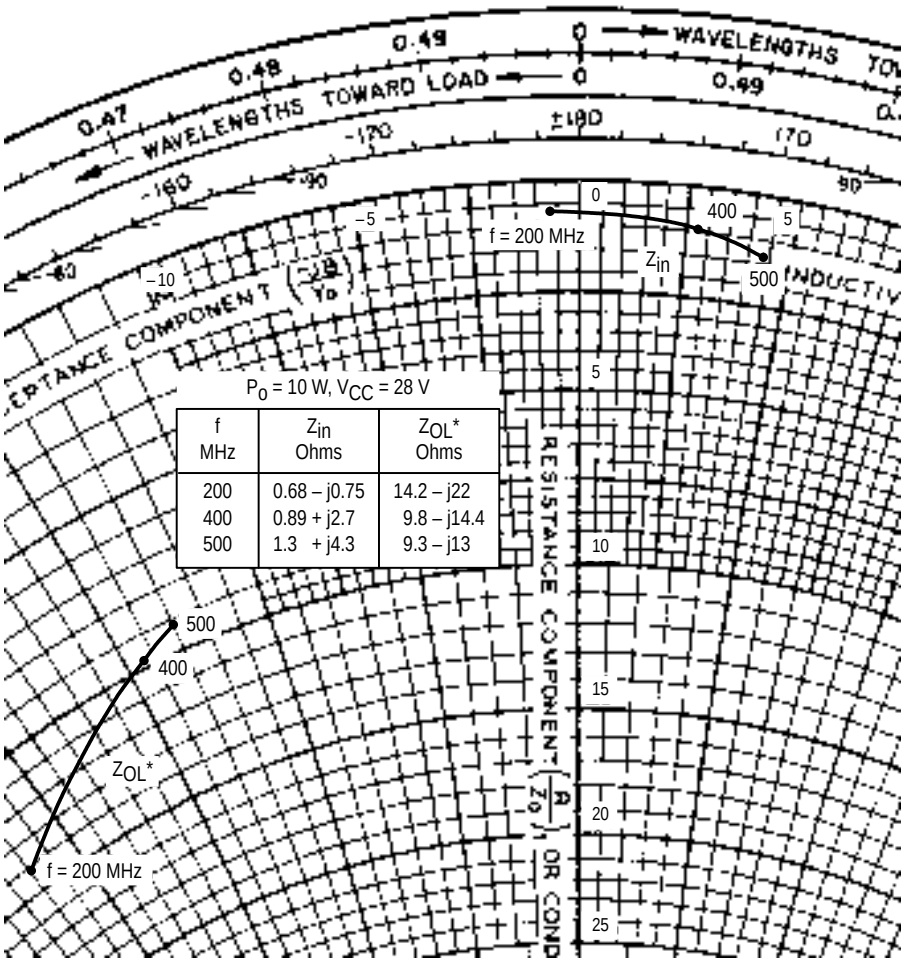


P_0 = 10 W, V_{CC} = 28 V

f MHz	Z_{in} Ohms	Z_{OL}* Ohms
200	0.68 – j0.75	14.2 – j22
400	0.89 + j2.7	9.8 – j14.4
500	1.3 + j4.3	9.3 – j13

Z_{OL}* = Conjugate of the optimum load impedance into which the device output operates at a given output power, voltage and frequency.

Figure 6. Series Equivalent Impedance

PACKAGE DIMENSIONS

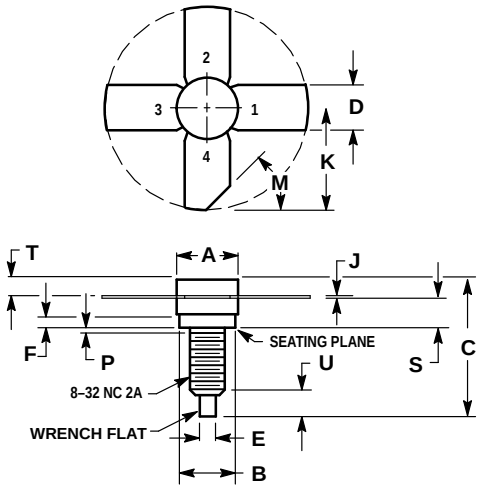

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	7.06	7.26	0.278	0.286
B	6.20	6.50	0.244	0.256
C	14.99	16.51	0.590	0.650
D	5.46	5.96	0.215	0.235
E	1.40	1.65	0.055	0.065
G	1.52	—	0.060	—
J	0.08	0.17	0.003	0.007
K	11.05	—	0.435	—
M	45° NOM		45° NOM	
P	—	1.27	—	0.050
S	3.00	3.25	0.118	0.128
T	1.40	1.77	0.055	0.070
U	2.92	3.68	0.115	0.145

STYLE 1:
PIN 1. EMITTER
2. BASE
3. EMITTER
4. COLLECTOR

CASE 244–04
ISSUE J

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters can and do vary in different applications. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Literature Distribution Centers:
USA: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036.
EUROPE: Motorola Ltd.; European Literature Centre; 88 Tanners Drive, Blakelands, Milton Keynes, MK14 5BP, England.
JAPAN: Nippon Motorola Ltd.; 4-32-1, Nishi-Gotanda, Shinagawa-ku, Tokyo 141, Japan.
ASIA PACIFIC: Motorola Semiconductors H.K. Ltd.; Silicon Harbour Center, No. 2 Dai King Street, Tai Po Industrial Estate, Tai Po, N.T., Hong Kong.