EPCOS

SAW Components

Data Sheet B3853




Ceramic package **DCC18**

Features

- Low-loss IF filter for CDMA base station
- Temperature stable
- Ceramic SMD package
- Unbalanced or balanced operation

Terminals


- Gold plated

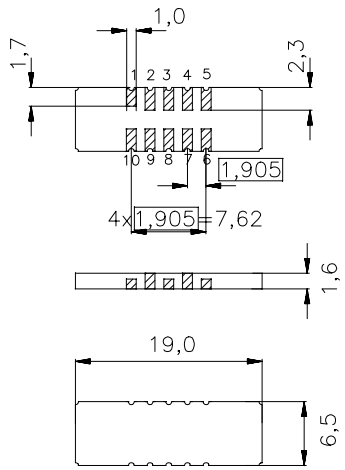

Dimensions in mm, approx. weight 0,8 g

Pin configuration

1	Input or balanced input
10	Input ground or balanced input
6	Output or balanced output
5	Output ground or balanced output
3, 8	Ground
2, 4, 7, 9	Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B3853	B39141-B3853-U210	C61157-A7-A54	F61074-V8166-Z000

Electrostatic **S**ensitive **D**evice (**ESD**)

Maximum ratings

Operable temperature range	T	–40 / +85	˚C	
Storage temperature range	T_{stg}	–40 / +85	˚C	
DC voltage	V_{DC}	5	V	
Source power	P_s	10	dBm	

Characteristics


Operating temperature range: T = 0 to +85 °C
Terminating source impedance: Z_S = 50 Ω and external matching network
Terminating load impedance: Z_L = 50 Ω and external matching network

			min.	typ.	max.	
Nominal frequency		f_N	—	141,0	—	MHz
Minimum insertion attenuation		α_N	—	11,0	13,0	dB
3,75 dB bandwidth						
α_{rel} ≤ 3,75dB		$B_{3,75dB}$	1,18	1,32	—	MHz
Amplitude ripple (p-p)	$f_N \pm 525$ kHz	$\Delta\alpha$	—	0,2	1,0	dB
Phase Linearity (rms)	$f_N \pm 630$ kHz	$\Delta\varphi$	—	1,0	2,0	deg
Absolute group delay	@ f_N	τ	—	2,75	—	µs
Group delay ripple (p-p)	$f_N \pm 525$ kHz	$\Delta\tau$	—	100	300	ns
Relative attenuation (relative to α_N)		α_{rel}				
50 MHz ... 120 MHz			50	60	—	dB
120 MHz ... f_N – 1350 kHz			45	52	—	dB
f_N – 1350 kHz ... f_N – 1250 kHz			41	45	—	dB
f_N + 1250 kHz ... f_N + 1750 kHz			41	45	—	dB
f_N + 1750 kHz ... 175 MHz [1]			45	48	—	dB
175 MHz ... 500 MHz			60	70	—	dB
Return loss	$f_N \pm 525$ kHz		10	15	—	dB
3rd-order intercept point		*IP3*	40	45	—	dB
Temperature coefficient of frequency [2]		TC_f	—	–0,036	—	ppm/K²
Turnover temperature		T_0	—	42,5	—	°C


[1] Except for two peaks around 144 and 146 MHz with typically 45dB

[2] Temperature dependance of f_c: $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$


Normalized frequency response

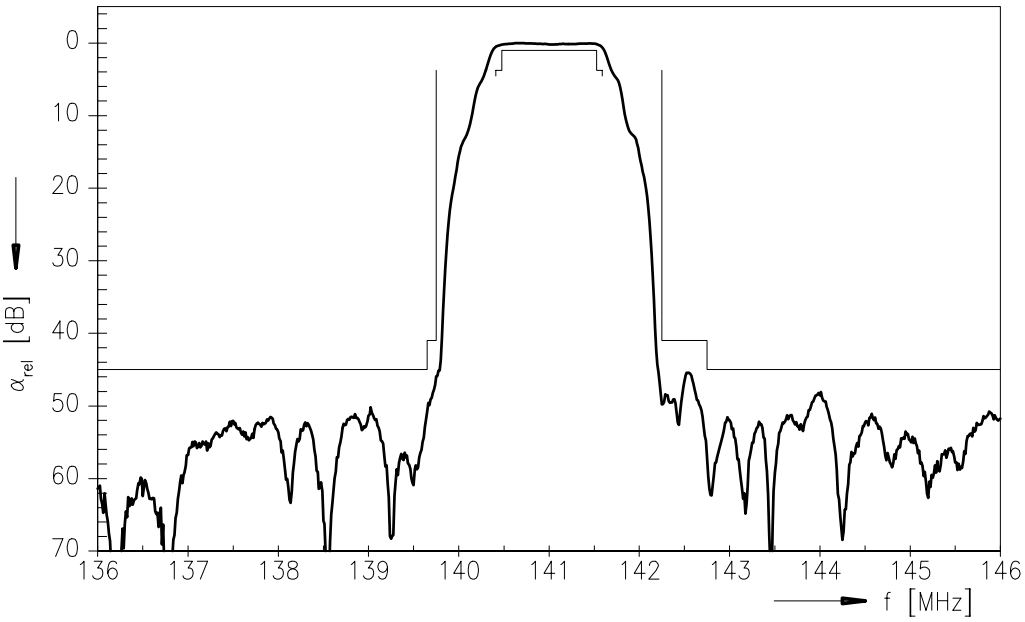

Normalized frequency response (pass band)

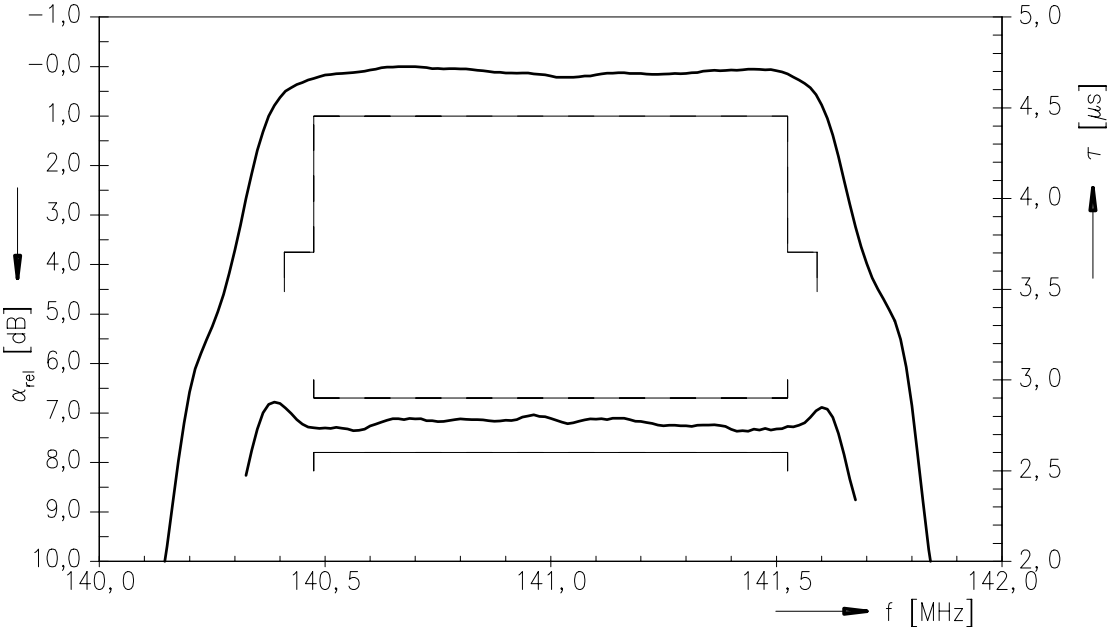


Normalized frequency response (wide band)

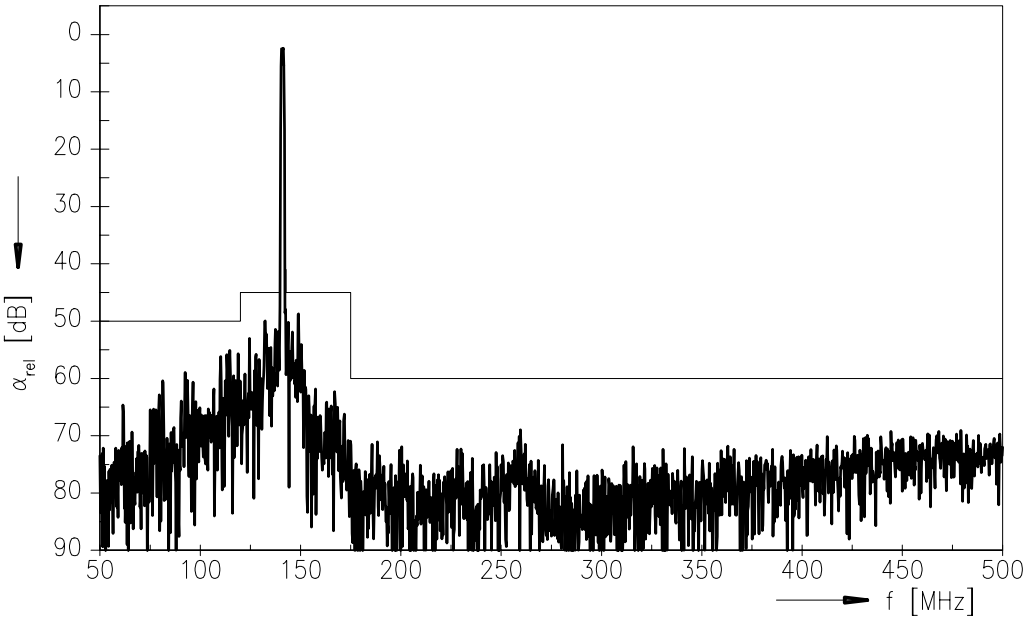

Matching network to 50 Ω

(Element values depend on PCB layout)

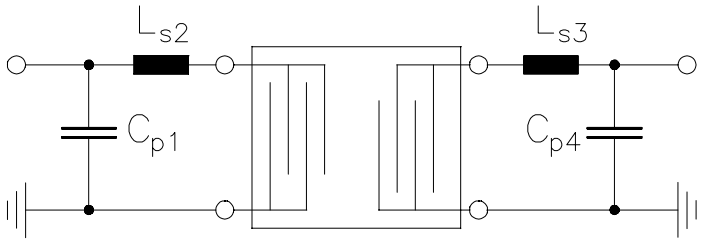

C_{p1} = 56 pF

L_{s2} = 68 nH // 2.2 pF

L_{s3} = 68 nH // 1.2 pF

C_{p4} = 56 pF

Published by EPCOS AG
Surface Acoustic Wave Components Division, SAW MC IS
P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.