
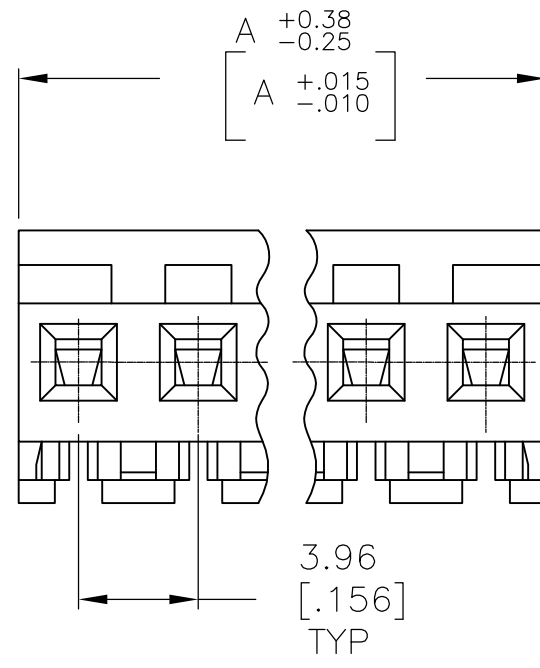


D

C

B

A

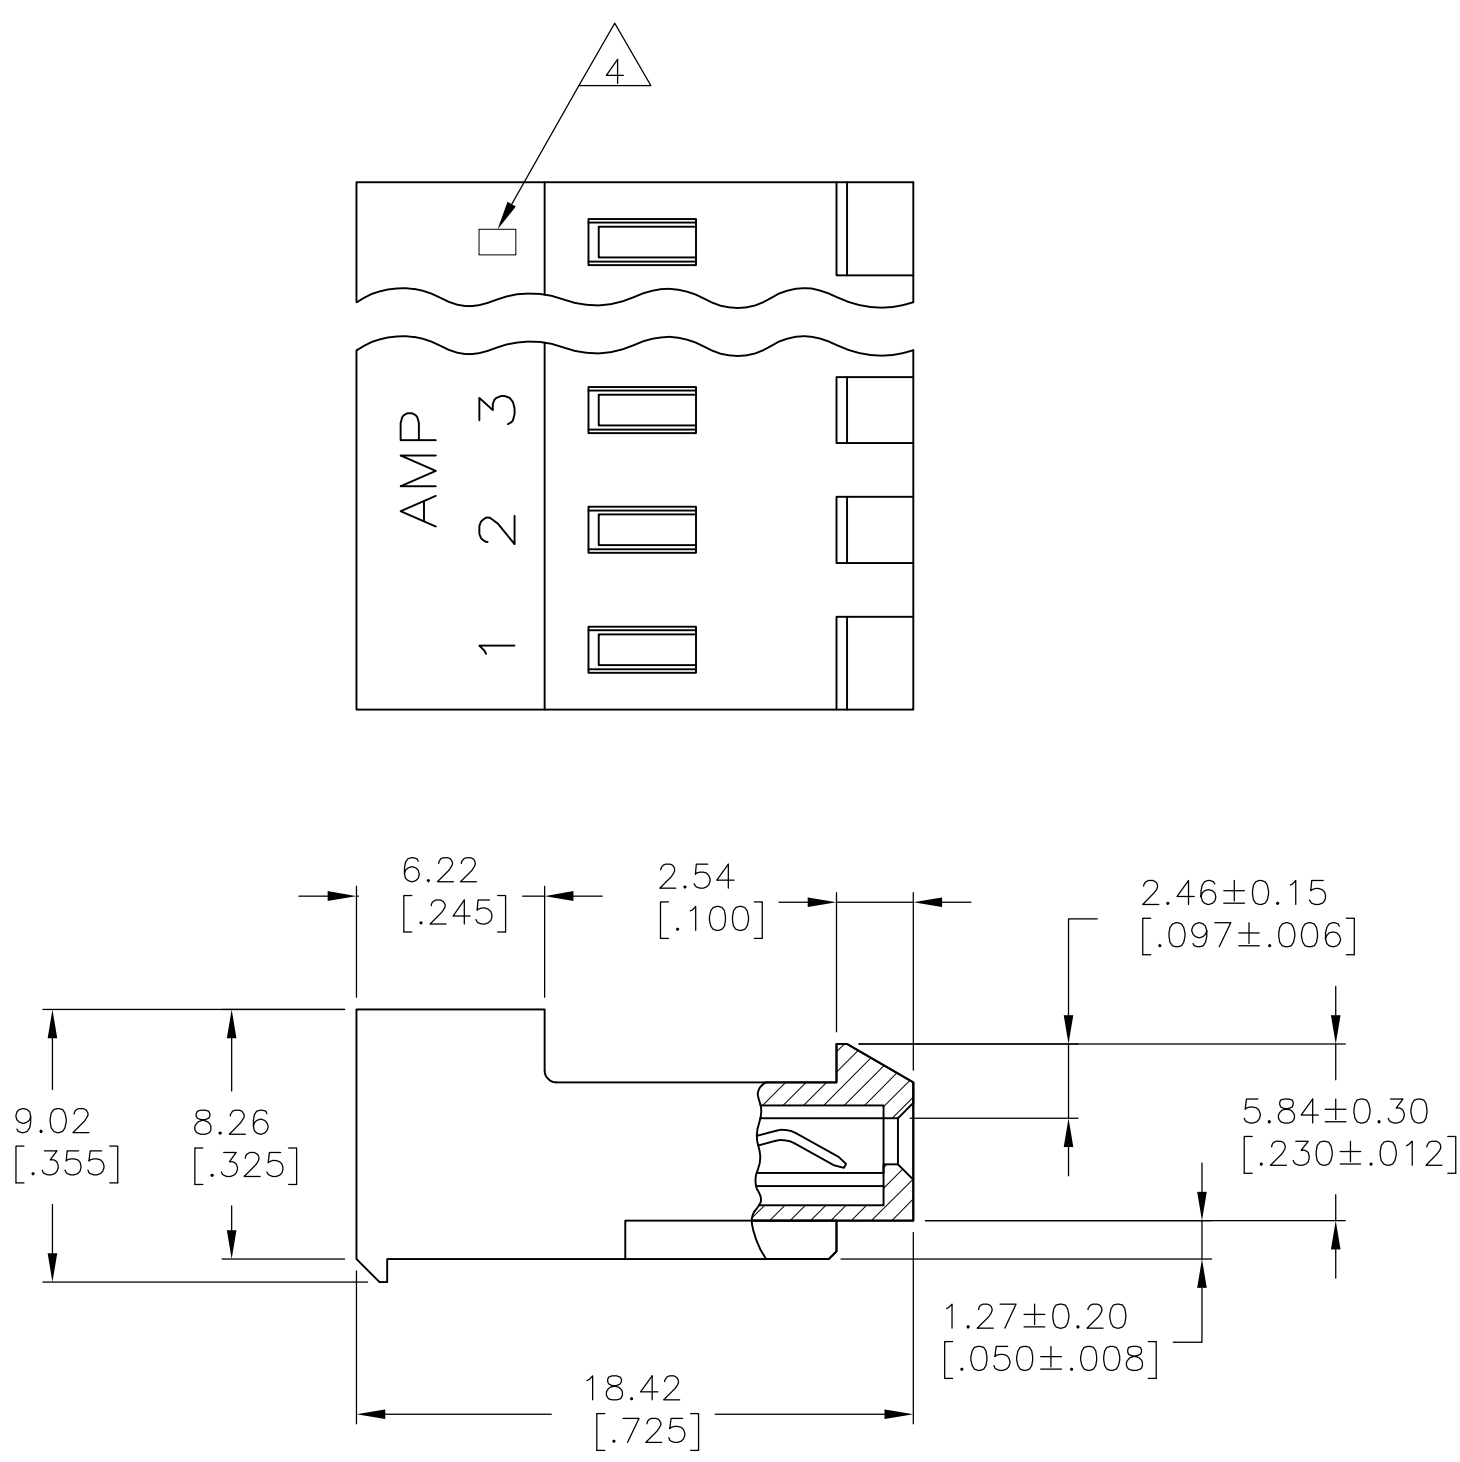

- 1

MATERIAL: CONNECTOR – NYLON UL94–V2.
CONTACTS – 0.30[.012] THICK COPPER ALLOY
(BRIGHT TIN–LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 640430–2 THRU 2–640430–4).
(MATTE WHISKER MITIGATED TIN 0.00203[.000080]
MIN. THICKNESS OVER NICKEL UNDERPLATE FOR
3–640430–2 THRU 5–640430–4).
- 2

CONTACTS ACCEPT 26 AWG WIRE WITH 2.41[.095] MAX
INSULATION DIAMETER.
- 3

CONTACTS MUST ACCEPT 1.14±0.03[.045]
POST AND REMAIN LOCKED IN POSITION.
- 4


IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY
NOT APPEAR ON ALL ASSEMBLIES.
- 5

DIMENSIONS IN BRACKETS ARE IN INCHES.
- 6

HOUSING FEATURES ARE: CLOSED END WITH LOCKING
RAMP.
- 7

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 8

BLUE COLOR STRIPE ON HOUSING (NOT SHOWN) MAY RUN DOWN BETWEEN RIBS.

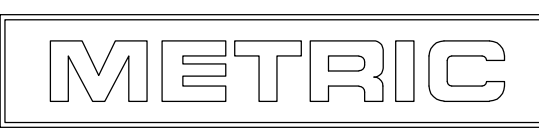

	95.10[3.744]	24	5–640430–4
	91.13[3.588]	23	5–640430–3
	87.17[3.432]	22	5–640430–2
	83.21[3.276]	21	5–640430–1
	79.25[3.120]	20	5–640430–0
	75.29[2.964]	19	4–640430–9
	71.32[2.808]	18	4–640430–8
	67.36[2.652]	17	4–640430–7
	63.40[2.496]	16	4–640430–6
	59.44[2.340]	15	4–640430–5
	55.47[2.184]	14	4–640430–4
	51.51[2.028]	13	4–640430–3
	47.55[1.872]	12	4–640430–2
	43.59[1.716]	11	4–640430–1
	39.62[1.560]	10	4–640430–0
	35.66[1.404]	9	3–640430–9
	31.70[1.248]	8	3–640430–8
	27.74[1.092]	7	3–640430–7
	23.77[.936]	6	3–640430–6
	19.81[.780]	5	3–640430–5
	15.85[.624]	4	3–640430–4
	11.89[.468]	3	3–640430–3
	7.92[.312]	2	3–640430–2
△ SUPERCEDED	95.10[3.744]	24	2–640430–4
△ SUPERCEDED	91.13[3.588]	23	2–640430–3
△ SUPERCEDED	87.17[3.432]	22	2–640430–2
△ SUPERCEDED	83.21[3.276]	21	2–640430–1
△ SUPERCEDED	79.25[3.120]	20	1–640430–0
△ SUPERCEDED	75.29[2.964]	19	1–640430–9
△ SUPERCEDED	71.32[2.808]	18	1–640430–8
△ SUPERCEDED	67.36[2.652]	17	1–640430–7
△ SUPERCEDED	63.40[2.496]	16	1–640430–6
△ SUPERCEDED	59.44[2.340]	15	1–640430–5
△ SUPERCEDED	55.47[2.184]	14	1–640430–4
△ SUPERCEDED	51.51[2.028]	13	1–640430–3
△ SUPERCEDED	47.55[1.872]	12	1–640430–2
△ SUPERCEDED	43.59[1.716]	11	1–640430–1
△ SUPERCEDED	39.62[1.560]	10	1–640430–0
△ SUPERCEDED	35.66[1.404]	9	640430–9
△ SUPERCEDED	31.70[1.248]	8	640430–8
△ SUPERCEDED	27.74[1.092]	7	640430–7
	23.77[.936]	6	640430–6
	19.81[.780]	5	640430–5
	15.85[.624]	4	640430–4
	11.89[.468]	3	640430–3
	7.92[.312]	2	640430–2
	DIM A	NO. OF CIRCUITS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± 0.13 [.005]

4 PLC ± -

ANGLES ± -

FINISH 1

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

1

DWN
S. CARPENTER
08JUL2003

CHK
D. BOSSI
08JUL2003

APVD
D. BOSSI
08JUL2003

PRODUCT SPEC
108–1051

APPLICATION SPEC
114–1020

WEIGHT
–

CUSTOMER DRAWING

TE Connectivity

NAME
MTA 156 CONNECTOR ASSEMBLY,
26 AWG, STANDARD
–

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=640430

RESTRICTED TO
–

SCALE
4:1

SHEET
1 OF 1

REV
V