
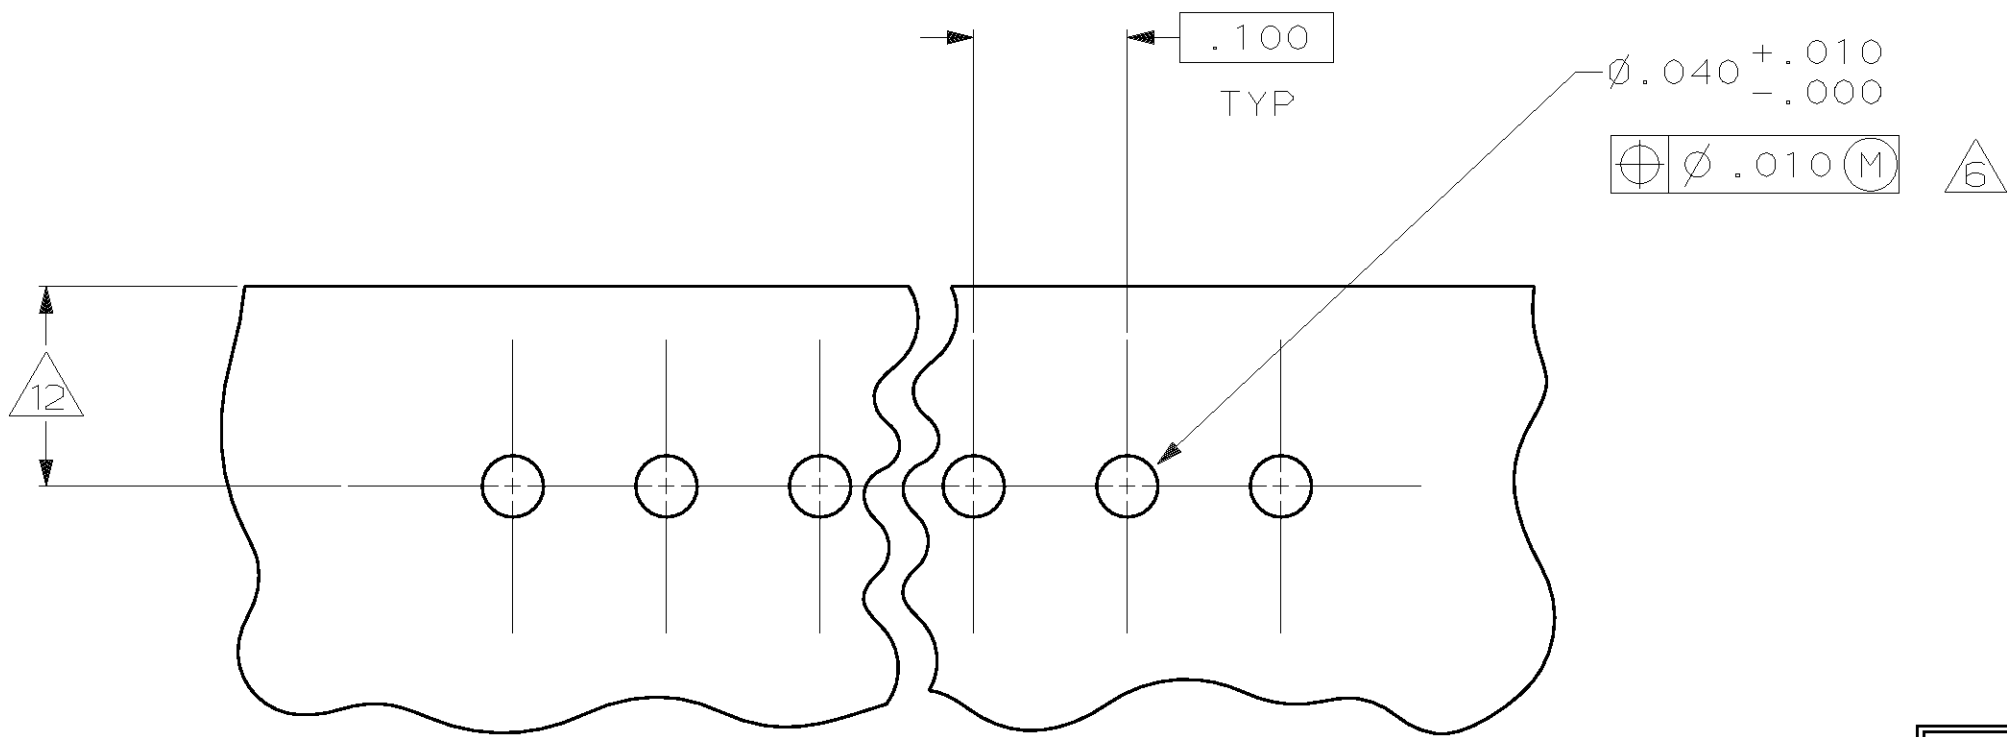
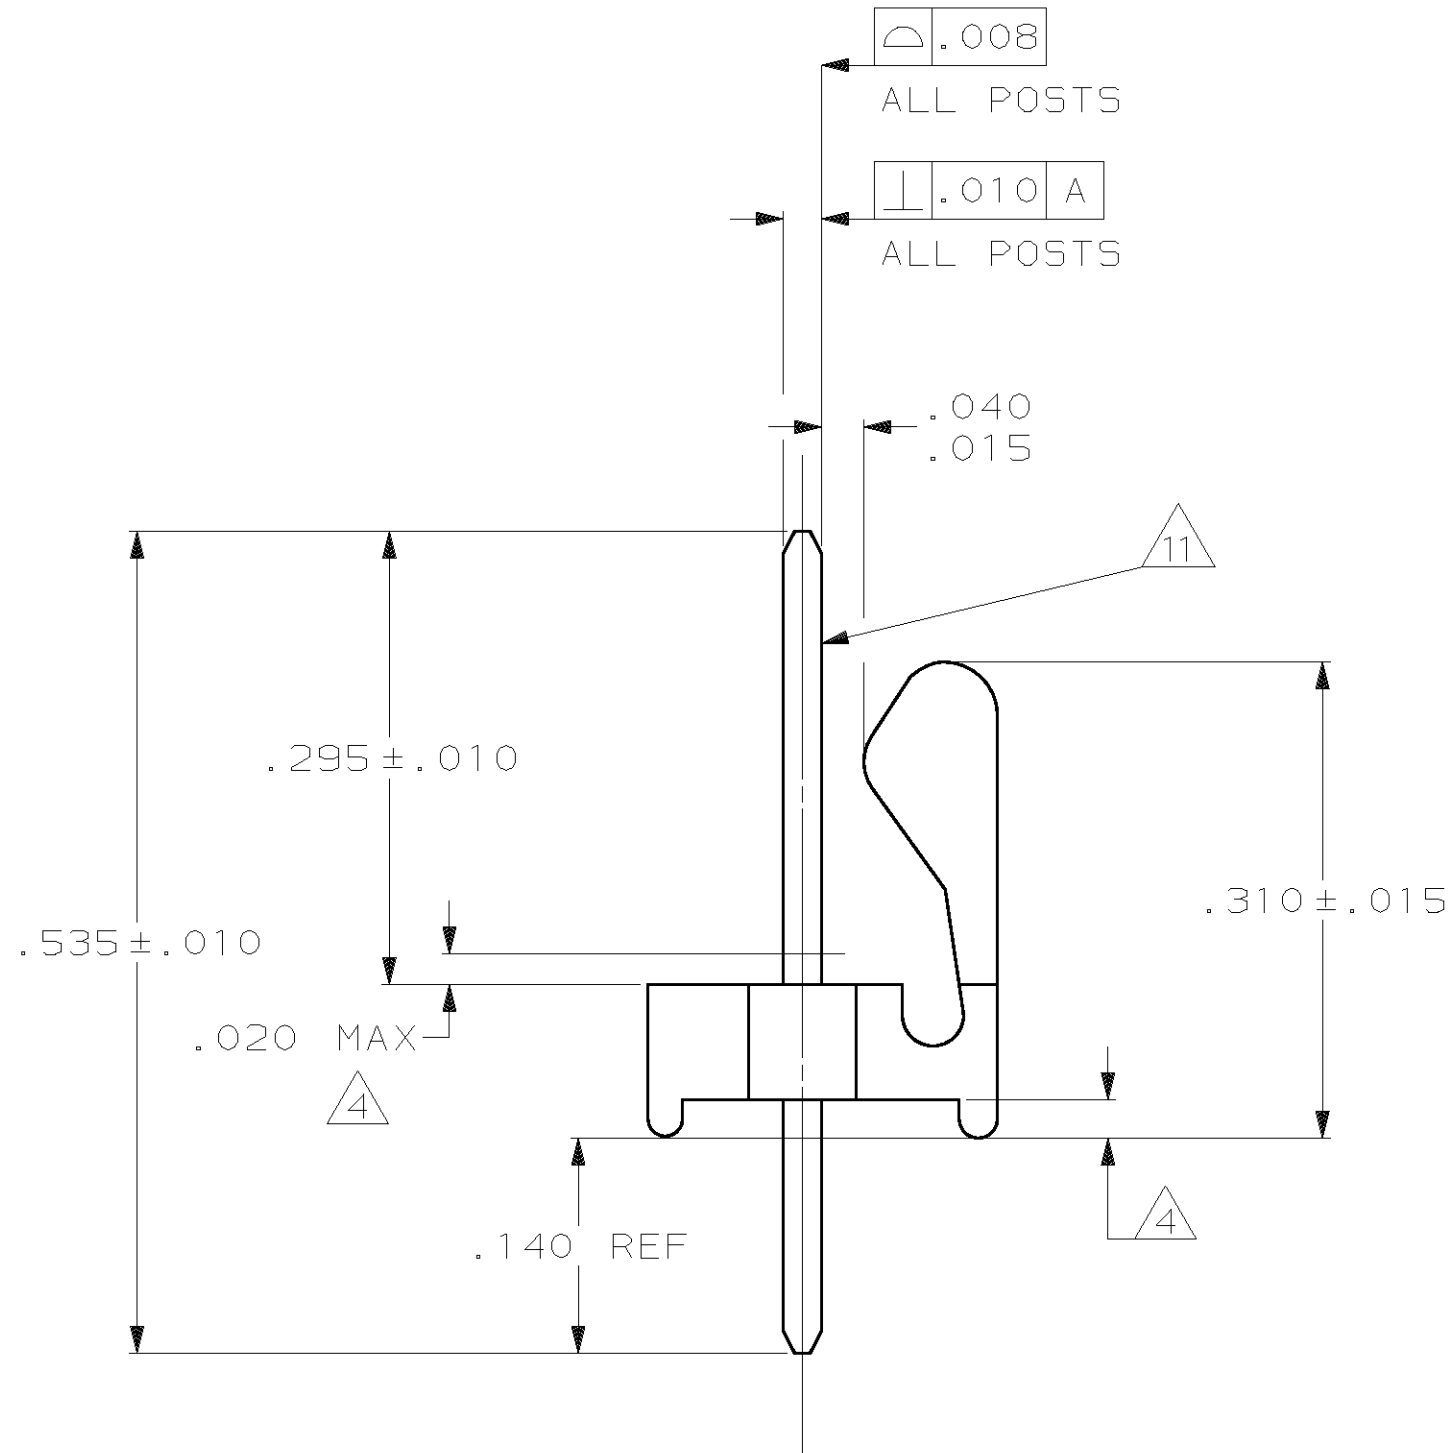
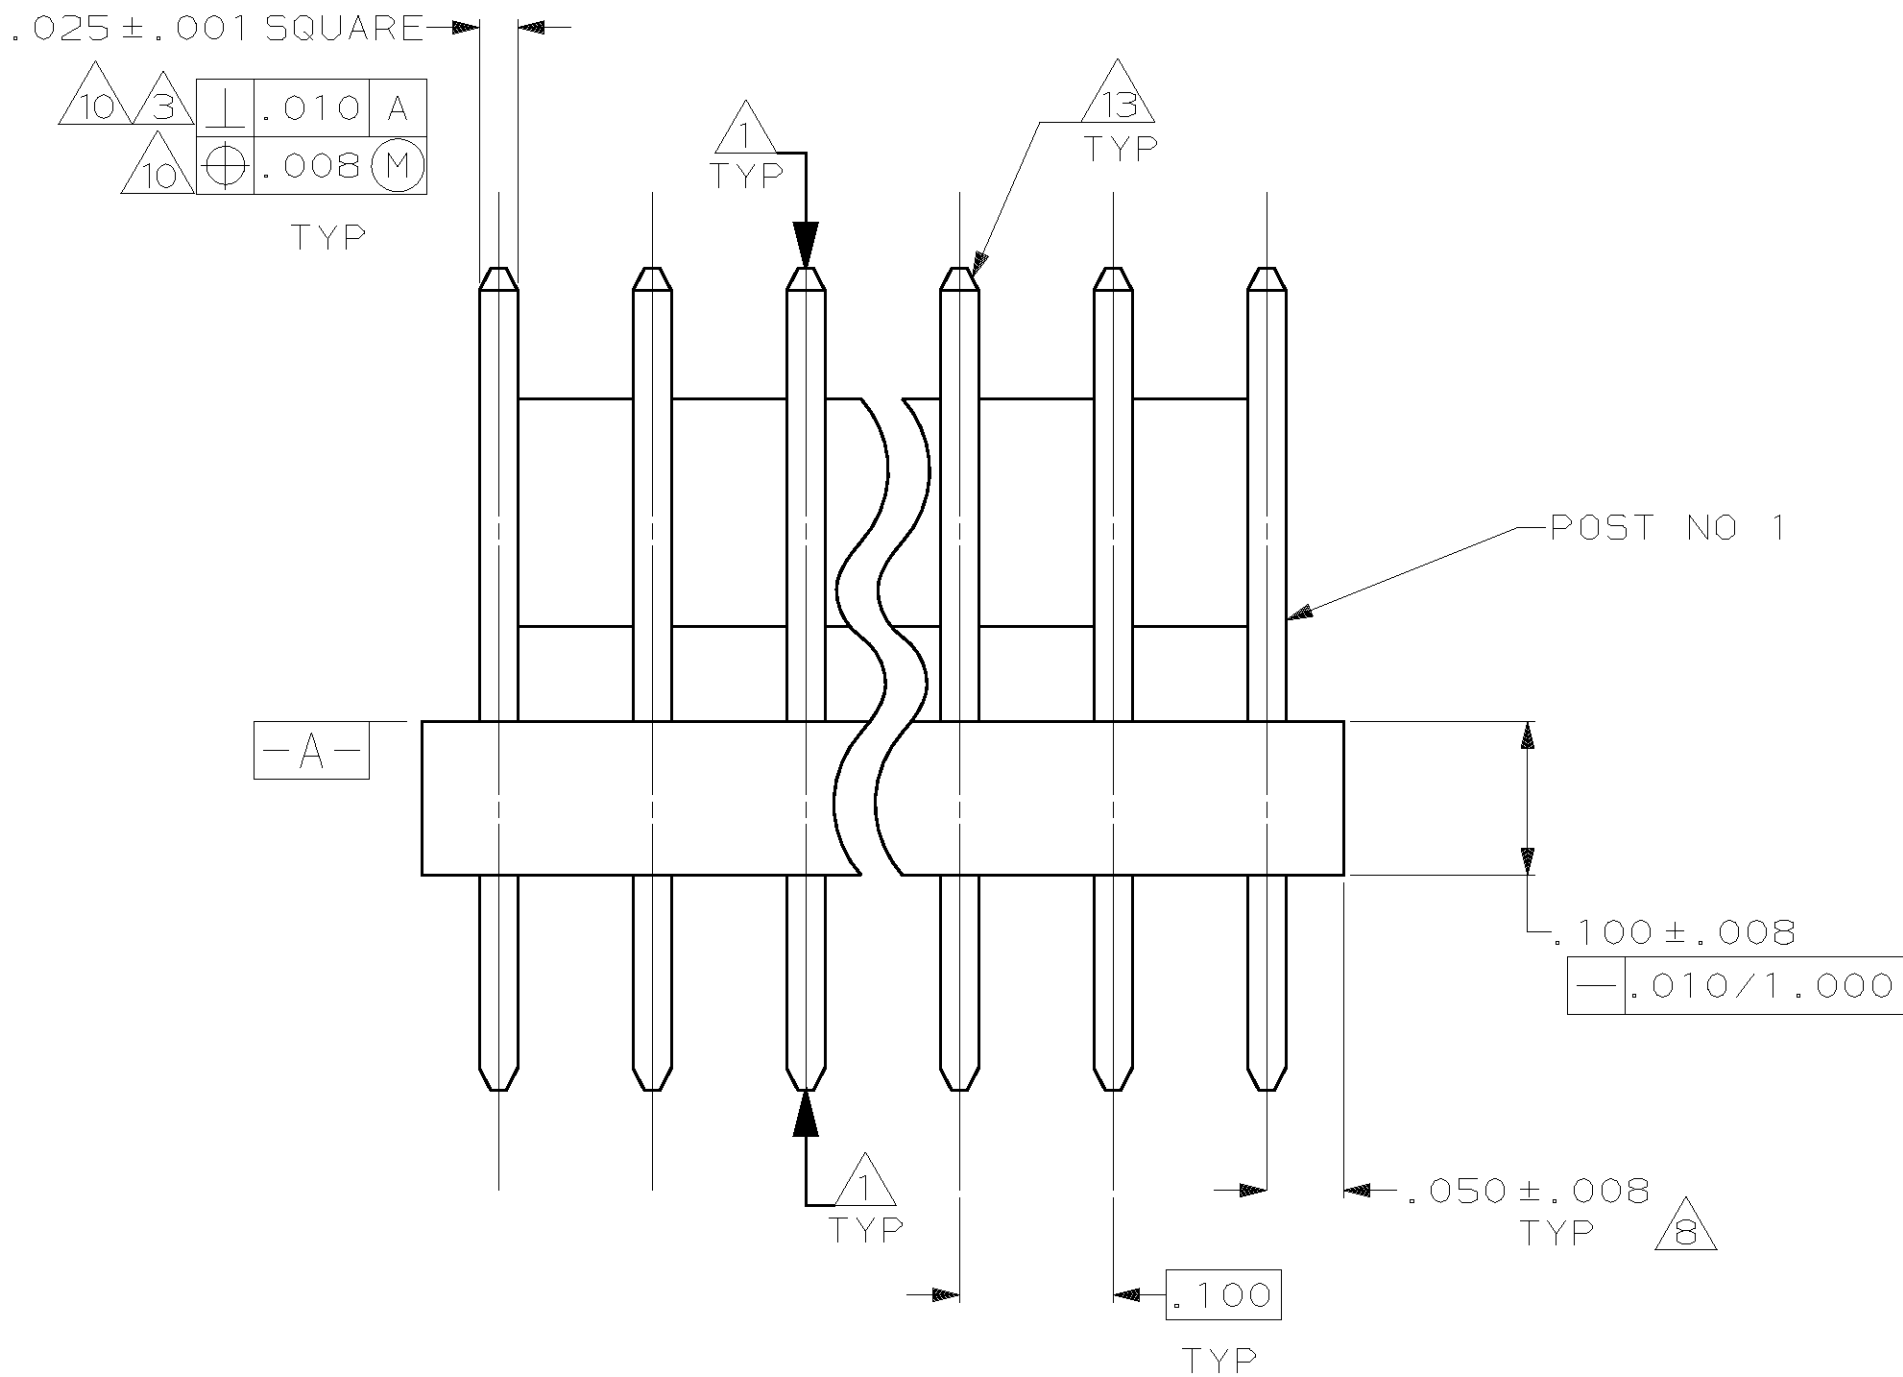


LOC	DIST	P	F	REVISIONS			DATE	APPD
				ZONE	LTR	DESCRIPTION		
CM	54			V		REV PER EC 061B-0221-98	26-FEB-99	JH RS

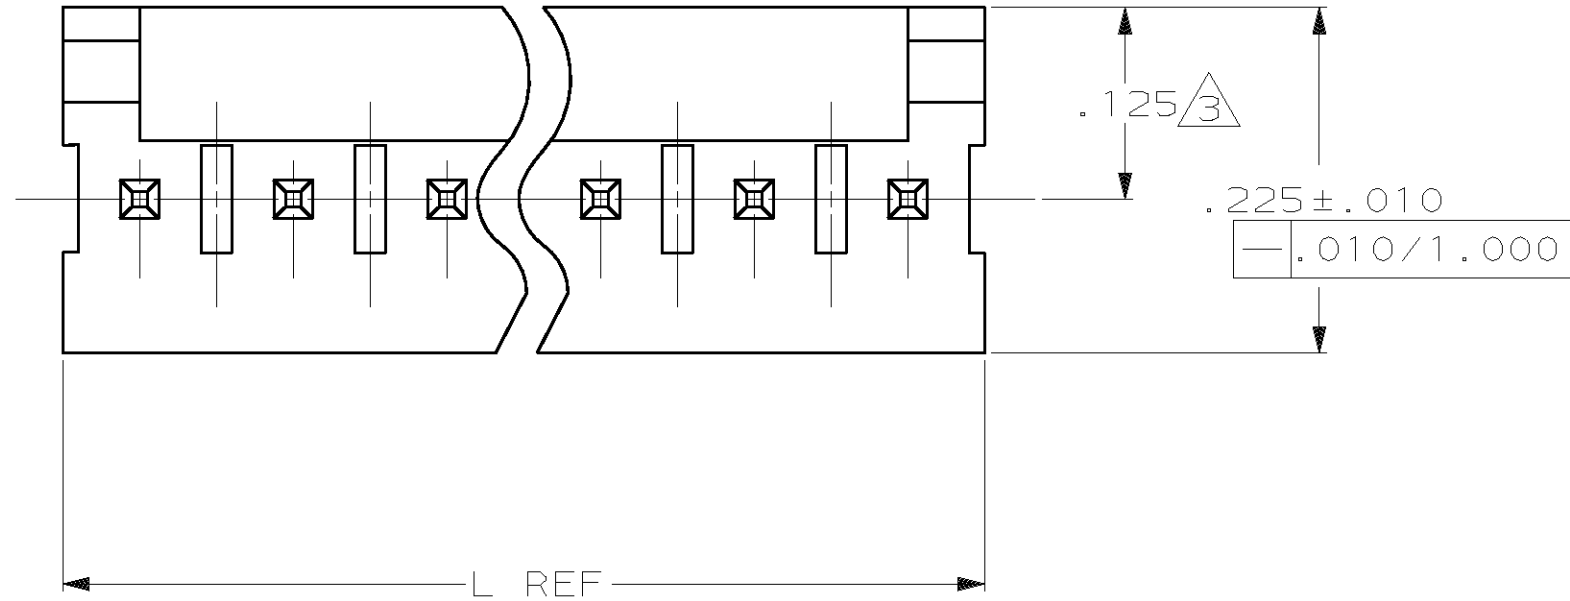

RECOMMENDED MOUNTING HOLE PATTERN
FOR .063 THICK P.C. BOARD

		1.000	25.40
.035	0.89	.535	13.59
.032	0.81	.310	7.87
.025	0.64	.295	7.49
.020	0.51	.225	5.72
.015	0.38	.140	3.56
.010	0.25	.130	3.30
.008	0.20	.125	3.18
.005	0.13	.100	2.54
.003	0.08	.063	1.60
.001	0.03	.050	1.27
.000	0.00	.040	1.02
IN	MM	IN	MM

CONVERSION TABLE

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

- POST TO WITHSTAND 13 NEWTONS (3 LBS) MIN. AXIAL FORCE IN BOTH DIRECTIONS SHOWN WITHOUT DISLODGING.
- TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- MEASURED AT SURFACE -A-
- PLASTIC FLASH PERMITTED IN THIS AREA.
- PARTS COMPLY WITH AMP SOLDERABILITY SPEC. NO. 109-11-2.
- ONE HOLE MAY BE UNDERSIZED (.032-.035 DIA) FOR ASSEMBLY RETENTION DURING WAVE SOLDERING.
- MATERIAL: HEADER-THERMOPLASTIC POLYESTER
UL94V-0 (NATURAL)
POST-COPPER ALLOY (TIN-PLATED)
- COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- PLASTIC BURRS CAUSED BY CUT-OFF TOOLING ARE PERMITTED WITHIN THE MAXIMUM TOLERANCE ENVELOPE.
- POSTS TO BE MEASURED WHEN STRIP IS HELD FLAT.
- POSTS MUSTS WITHSTAND TWO 90° BENDS AGAINST EXTRUSION WITHOUT BREAKING.
- DIMENSION SHOULD BE .130 MIN WHEN MATING WITH A MTA 100 CONNECTOR ASSEMBLY OR A CST 100 CONNECTOR.
- PIN BURR OF .005 MAX. VERTICAL AND .003 MAX. HORIZONTAL PERMITTED AT POST TIPS ON BOTH ENDS.

2.800	71.12	28	2-640456-8
2.700	68.58	27	2-640456-7
2.600	66.04	26	2-640456-6
2.500	63.50	25	2-640456-5
2.400	60.96	24	2-640456-4
2.300	58.42	23	2-640456-3
2.200	55.88	22	2-640456-2
2.100	53.34	21	2-640456-1
2.000	50.80	20	2-640456-0
1.900	48.26	19	1-640456-9
1.800	45.72	18	1-640456-8
1.700	43.18	17	1-640456-7
1.600	40.64	16	1-640456-6
1.500	38.10	15	1-640456-5
1.400	35.56	14	1-640456-4
1.300	33.02	13	1-640456-3
1.200	30.48	12	1-640456-2
1.100	27.94	11	1-640456-1
1.000	25.40	10	1-640456-0
.900	22.86	9	640456-9
.800	20.32	8	640456-8
.700	17.78	7	640456-7
.600	15.24	6	640456-6
.500	12.70	5	640456-5
.400	10.16	4	640456-4
.300	7.62	3	640456-3
.200	5.08	2	640456-2
IN	MM	NO OF POSITIONS PART NUMBER	
L			

PART NO			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm (INCHES) TOLERANCES ON : 2 PLC DEC ± . 3 PLC DEC ± .005 ANGLES ± 0°30'			
DR 3-16-93 L. SMITH		AMP Incorporated Harrisburg, PA 17105-3608	
CHK 3-16-93 R. SWING		NAME MTA 100 HEADER ASSEMBLY, FRICTION LOCK, NOTCHED, .025 SQUARE STRAIGHT POST, TIN PLATED	
APPD 4-15-93 R. SPEER		SIZE D	
APPD 4-15-93 R. SPEER		CAGE CODE 00779	
PRODUCT SPEC -		DRAWING NO C-640456	
FINISH -		SCALE 8:1	
WEIGHT -		SHEET 1 OF 1	

CUSTOMER DRAWING