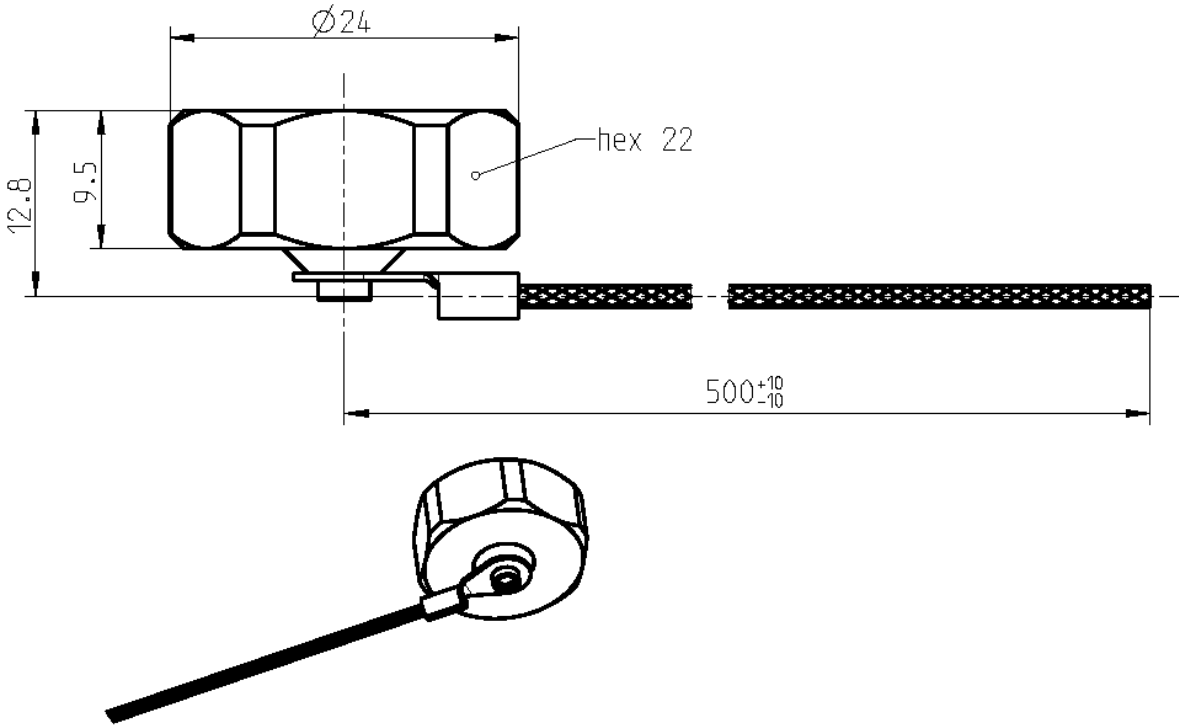


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.0

Technical Data Sheet - Draft		Rosenberger
4.1-9.5 / 4.3-10	Protection Cap with cord	65Z001-001N
		
All dimensions are in mm; tolerances according to ISO 2768 m-H		
Description Protection cap for 4.1-9.5 and 4.3-10 female connectors.		
Material and plating		
Connector parts Protection Cap Gasket	Material Brass PVC	Plating White bronze(e.g. Optalloy®)
Mechanical data Torque (recommended) 10 to 15 Nm		
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Email : info@rosenberger.de Page 1 / 2

Technical Data Sheet - Draft				Rosenberger			
4.1-9.5 / 4.3-10		Protection Cap with cord		65Z001-001N			
Environmental data Temperature range -55°C to +155°C Thermal shock MIL-STD-202, Meth. 107, Cond. B Corrosion MIL-STD-202, Meth. 101, Cond. B Vibration MIL-STD-202, Meth. 204, Cond. B Shock MIL-STD-202, Meth. 213, Cond. I Moisture resistance MIL-STD-202, Meth. 106 Degree of protection (mated pair) IEC 60529, IP68 RoHS compliant							
Weight Weight 11.7 g/pce							
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.							
Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
J. Gramsamer	05/11/14	J. Gramsamer	12.11.14	100	14-v660	S. Huber-Siegl	12.11.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Email : info@rosenberger.de			Page 2 / 2