

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.


| LOC | DIST |
|---|---|
| ES | 00 |


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | J3 | ADDED NEW DASH -23. | 06DEC2010 | IL | SZ |
| | J4 | ADDED NEW DASH NUMBER 2--4 | 12AUG2012 | CZ | SZ |
| | J6 | REV PER ECR-13-014088 | 06SEP2013 | CZ | SZ |
| | J7 | ADD NEW DASH NUMBER 2-5 | 10FEB2015 | CZ | SZ |

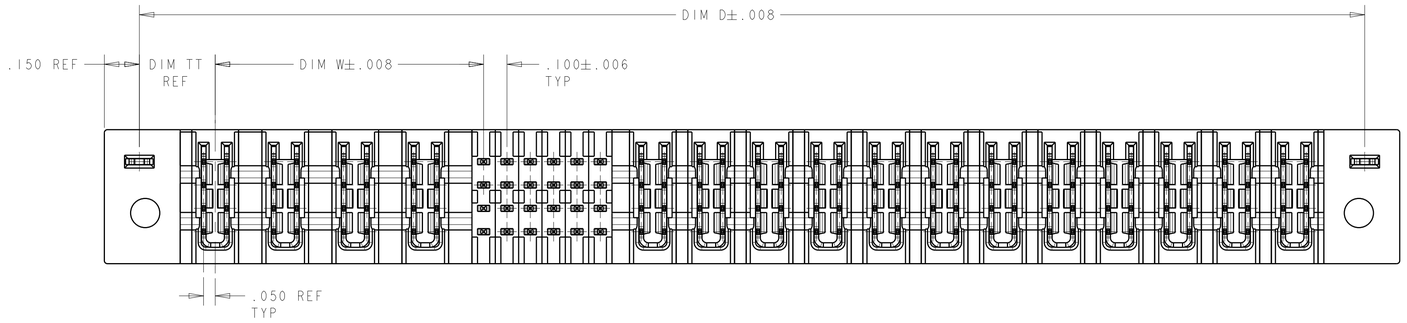

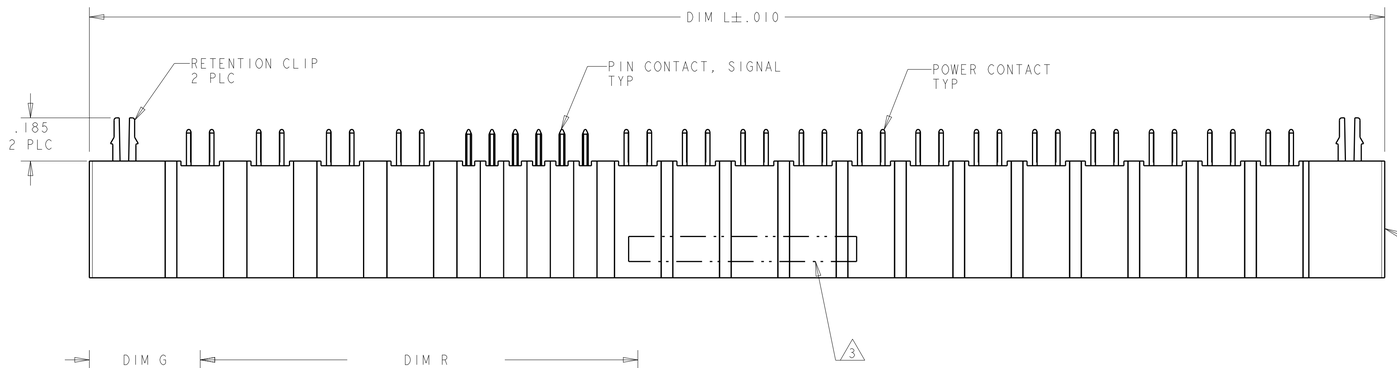

SECTION H-H

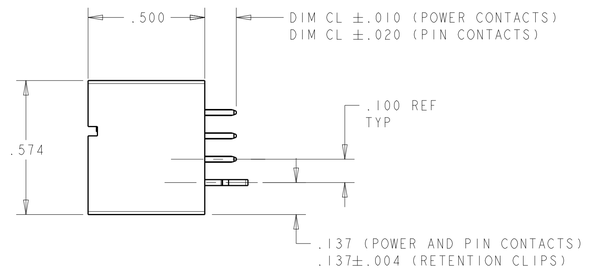


1. HEADER HOUSING: THERMO PLASTIC, BLACK, UL94 V-0; CONTACTS AND RETENTION CLIPS: COPPER ALLOY.
2. CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
3. "AMP", PART NUMBER AND DATE CODE MARKED IN THIS AREA. PARTS UNDER 2.50 LONG MAY BE MARKED ON BOTH SIDES.
4. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
6. APPLIES TO POWER MODULES ON LEFT SIDE OF SIGNAL CAVITIES OF HOUSING.
7. APPLIES TO POWER MODULES ON RIGHT SIDE OF SIGNAL CAVITIES OF HOUSING.
8. MECHANICAL CONNECTOR KEEP OUT ZONE.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL 1 -
FINISH 2 -

DWN J.McCLINTON 22MAR2005
CHK D.TROUT 22MAR2005
APVD R.WHYNE 22MAR2005
PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 10 | REV J7

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| | DIM"CL" | DIM "TT" | DIM "W" | DIM "U" | DIM "T" | DIM "S" | DIM "R" | DIM "L" | DIM "K" | DIM "G" | DIM "D" | RETENTION CLIP | DESCRIPTION | PART NUMBER |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| J7 | .135 | .300 | .175 | 1.600 | - | - | 1.050 | 1.950 | .275 | .450 | 1.650 | YES | 1P + 32S + 1P | 2-6600330-5 |
| | .135 | .300 | .175 | 1.300 | - | - | .750 | 1.650 | .275 | .450 | 1.350 | YES | 1P + 20S + 1P | 2-6600330-4 |
| | .135 | .175 | - | .400 | - | - | - | .750 | .200 | .375 | .450 | YES | 4S | 2-6600330-3 |
| | .135 | .300 | .425 | 1.600 | .250 | .250 | .800 | 1.950 | .275 | .450 | 1.650 | YES | 2P + 12S + 2P | 2-6600330-1 |
| | .135 | .300 | .925 | 3.200 | .250 | .250 | 1.900 | 3.550 | .275 | .450 | 3.250 | YES | 4P + 36S + 4P | 2-6600330-0 |
| | .135 | .300 | .975 | 3.000 | .250 | .250 | 1.700 | 3.350 | .275 | .450 | 3.050 | YES | 4P + 24S + 4P | 1-6600330-9 |
| | .135 | .300 | .375 | 2.400 | .200 | .200 | 1.650 | 2.750 | .275 | .450 | 2.450 | YES | 2HDP + 48S + 2HDP | 1-6600330-3 |
| | .135 | .300 | .675 | 2.400 | .250 | .250 | 1.350 | 2.750 | .275 | .450 | 2.450 | YES | 3P + 24S + 3P | 1-6600330-2 |
| | .135 | .325 | 1.700 | 4.500 | .300 | .300 | 2.400 | 4.850 | .300 | .475 | 4.550 | YES | 6ACP + 24S + 6ACP | 1-6600330-1 |
| | .135 | .300 | 2.175 | 5.400 | .250 | .250 | 2.850 | 5.750 | .275 | .450 | 5.450 | YES | 9P + 24S + 9P | 1-6600330-0 |
| | .135 | .300 | .925 | 2.900 | .250 | .250 | 1.600 | 3.250 | .275 | .450 | 2.950 | NO | 4P + 24S + 4P | 6600330-9 |
| | .135 | .300 | .975 | 3.250 | .250 | .250 | 1.700 | 3.600 | .275 | .450 | 3.300 | YES | 4P + 24S + 5P | 6600330-8 |
| | .165 | .300 | .425 | 1.900 | .250 | .250 | 1.100 | 2.250 | .275 | .450 | 1.950 | YES | 2P + 24S + 2P | 6600330-6 |
| | .135 | .300 | 1.375 | 4.000 | .200 | .200 | 2.250 | 4.350 | .275 | .450 | 4.050 | YES | 7P + 32S + 7P | 6600330-5 |
| | .135 | .325 | .225 | 1.575 | - | - | .950 | 1.925 | .300 | .475 | 1.625 | YES | 1P + 24S + 1P | 6600330-4 |
| | .135 | .300 | 1.975 | 4.200 | .300 | .250 | 2.725 | 4.550 | .275 | .450 | 4.250 | YES | 8P + 24S + 4ACP | 6600330-3 |
| | .135 | .325 | .250 | 2.500 | - | - | 1.900 | 2.850 | .300 | .475 | 2.550 | YES | 1P + 60S + 1P | 6600330-2 |
| | .135 | .325 | 1.150 | 5.200 | .250 | .300 | 1.875 | 5.550 | .300 | .475 | 5.250 | YES | 4ACP + 24S + 12P | 6600330-1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -
FINISH - -

DWN J.McCLINTON 22MAR2005
CHK D.TROUT 22MAR2005
APVD R.WHYNE 22MAR2005
PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 2 OF 10 | REV J7


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |

REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| PART NUMBER | ROWS | | POWER | | | | SIGNAL | | | | | | POWER | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | P3 | P4 | 1 | 2 | 3 | 4 | 5 | 6 | P5 | P6 | P7 | P8 | P9 | P10 | P11 | P12 | P13 | P14 | P15 | P16 |
| 6600330-1 | D | | SZ | SZ | SZ | SZ | SV | SV | SV | SV | SV | SV | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ |
| | C | | | | | | SV | SV | SV | SV | SV | SV | | | | | | | | | | | | |
| | B | | | | | | SV | SV | SV | SV | SV | SV | | | | | | | | | | | | |
| | A | | | | | | SV | SV | SV | SV | SV | SV | | | | | | | | | | | | |
| 4P+24S+12P | | HD | | | | | | | | | | | | | | | | | | | | | | HD |

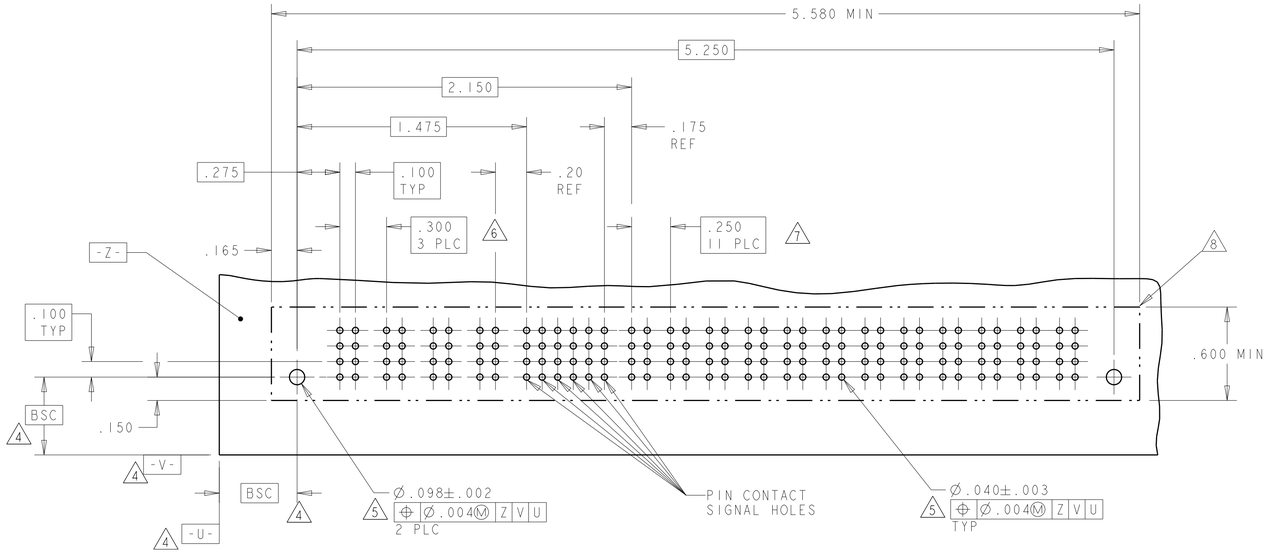



RECOMMENDED PCB LAYOUT 6600330-1
SCALE 2:1

| PART NUMBER | ROWS | | POWER | SIGNAL | | | | | | | | | | | | | | POWER | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | P2 |
| 6600330-2 | D | | SZ | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SZ |
| | C | | | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | |
| | B | | | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | |
| | A | | | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | SV | |
| 1P+60S+1P | | HD | | | | | | | | | | | | | | | | | HD |

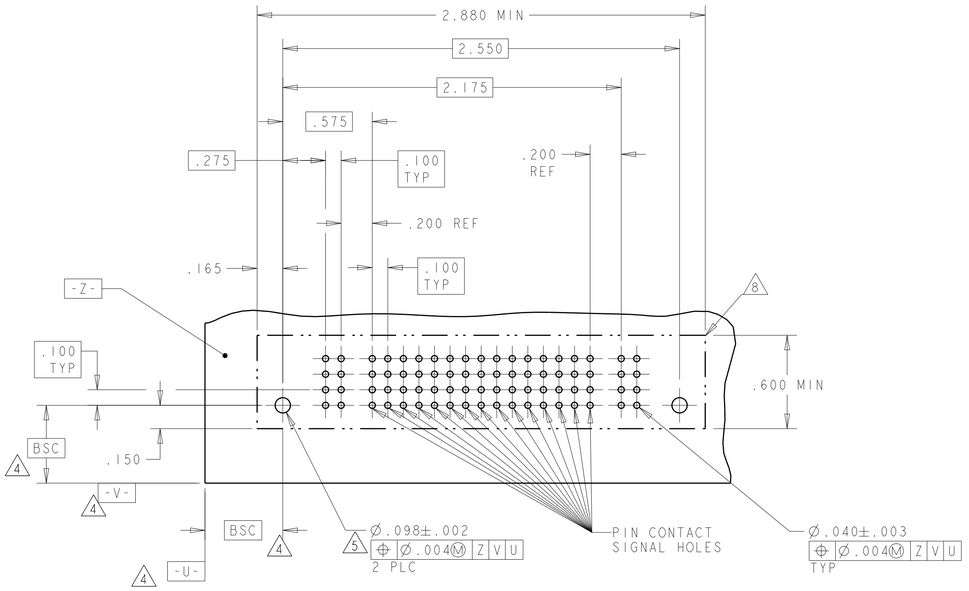



RECOMMENDED PCB LAYOUT 6600330-2
SCALE 2:1

| PART NUMBER | ROWS | | POWER | SIGNAL | | | | | | POWER | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | 1 | 2 | 3 | 4 | 5 | 6 | P2 | |
| 6600330-3 | D | | SZ | SV | SV | SV | SV | SV | SV | SZ | |
| | C | | | SV | SV | SV | SV | SV | SV | | |
| | B | | | SV | SV | SV | SV | SV | SV | | |
| | A | | | SV | SV | SV | SV | SV | SV | | |
| 8P+24S+4ACP | | HD | | | | | | | | | HD |

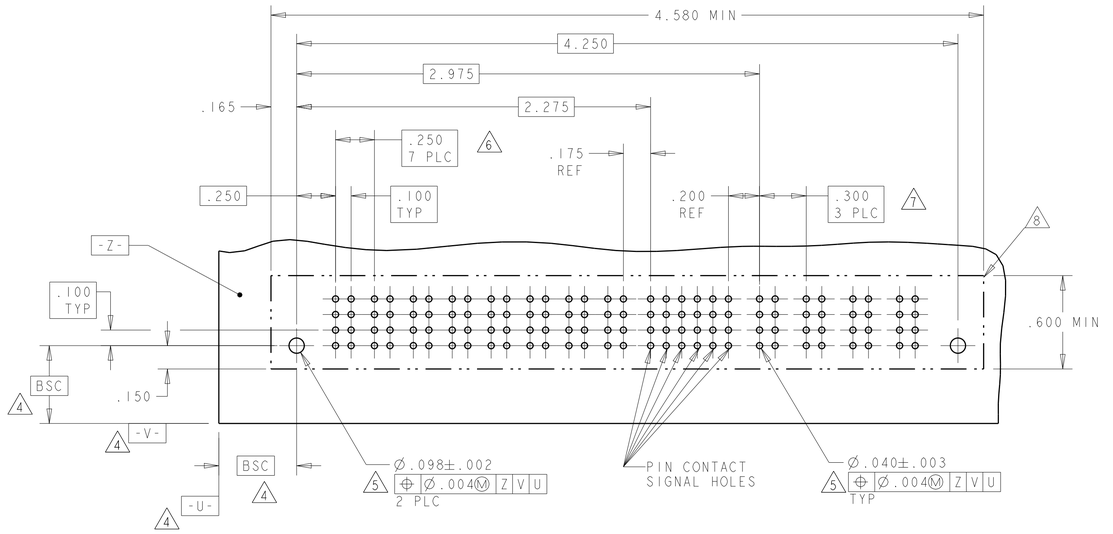


RECOMMENDED PCB LAYOUT 6600330-3
SCALE 2:1

| PART NUMBER | ROWS | | POWER | SIGNAL | | | | | | POWER | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | 1 | 2 | 3 | 4 | 5 | 6 | P2 | |
| 6600330-4 | D | | SZ | SV | SV | SV | SV | SV | SV | SZ | |
| | C | | | SV | SV | SV | SV | SV | SV | | |
| | B | | | SV | SV | SV | SS | SV | SV | | |
| | A | | | SV | SV | SV | SV | SV | SV | | |
| 1P+24S+1P | | HD | | | | | | | | | HD |

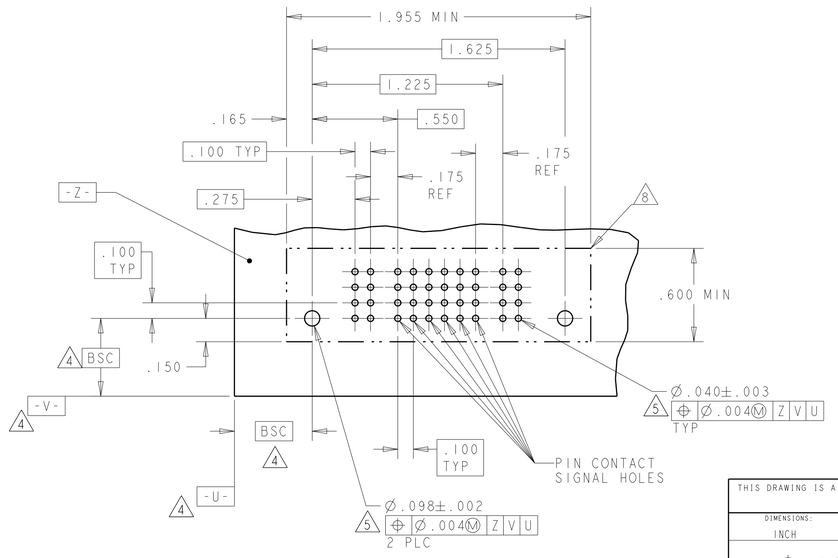


RECOMMENDED PCB LAYOUT 6600330-4
SCALE 2:1

| - | RETENTION CLIP | HD |
|---|---|---|
| STANDARD | SIGNAL CONTACT | SV or MV |
| MLBF | SIGNAL CONTACT | SS or MS |
| - | POWER CONTACT | SZ or MP |
| MATING SEQUENCE | DESCRIPTION | IDENTIFIER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -
FINISH - -

| | | |
|---|---|---|
| DWN | J.McCLINTON | 22MAR2005 |
| CHK | D.TROUT | 22MAR2005 |
| APVD | R.WHYNE | 22MAR2005 |

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 3 OF 10 | REV J7

4805 (3/11)


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |

REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| PART NUMBER | ROWS | | POWER P1 | P2 | P3 | P4 | P5 | P6 | P7 | SIGNAL 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | POWER P8 | P9 | P10 | P11 | P12 | P13 | P14 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 6600330-5 | D | | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SV | SV | SV | SV | SV | SV | SV | SV | SZ | SZ | SZ | SZ | SZ | SZ | SZ | |
| | C | | | | | | | | | SV | SV | SV | SV | SV | SV | SV | SV | | | | | | | | |
| | B | | | | | | | | | SV | SV | SV | SV | SV | SV | SV | SV | | | | | | | | |
| | A | | | | | | | | | SV | SV | SV | SV | SV | SV | SV | SV | | | | | | | | |
| 7P+32S+7P | | HD | | | | | | | | | | | | | | | | | | | | | | | HD |

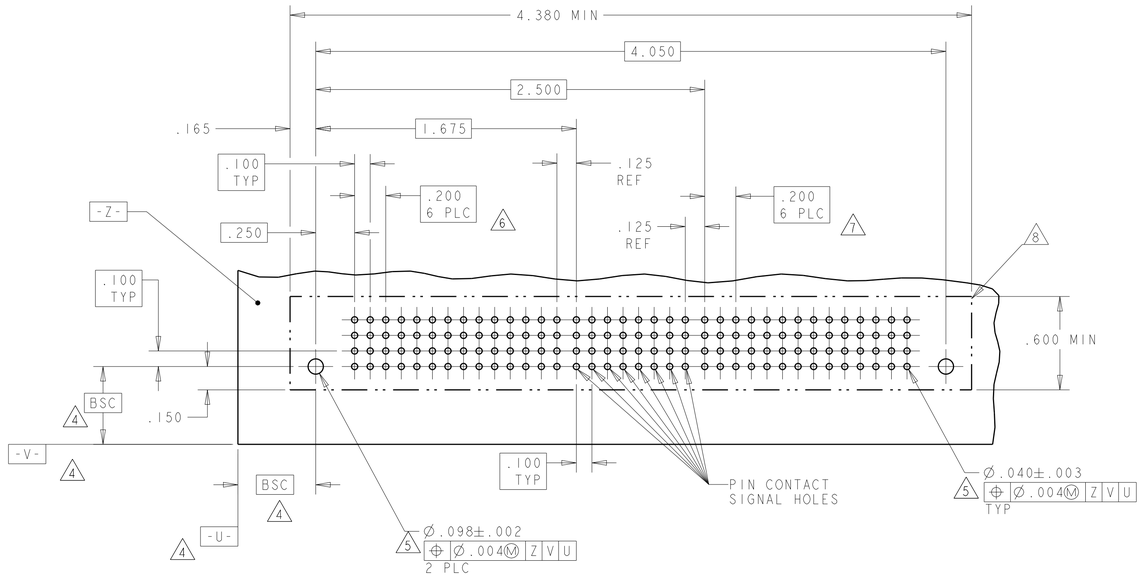


RECOMMENDED PCB LAYOUT 6600330-5
SCALE 2:1


| PART NUMBER | ROWS | | POWER P1 | P2 | SIGNAL 1 | 2 | 3 | 4 | 5 | 6 | POWER P3 | P4 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 6600330-6 | D | | MP | MP | MV | MV | MS | MV | MV | MV | MP | MP | |
| | C | | | | MV | MV | MV | MV | MV | MV | | | |
| | B | | | | MV | MV | MS | MV | MV | MV | | | |
| | A | | | | MV | MV | MV | MV | MV | MV | | | |
| 2P+24S+2P | | HD | | | | | | | | | | | HD |

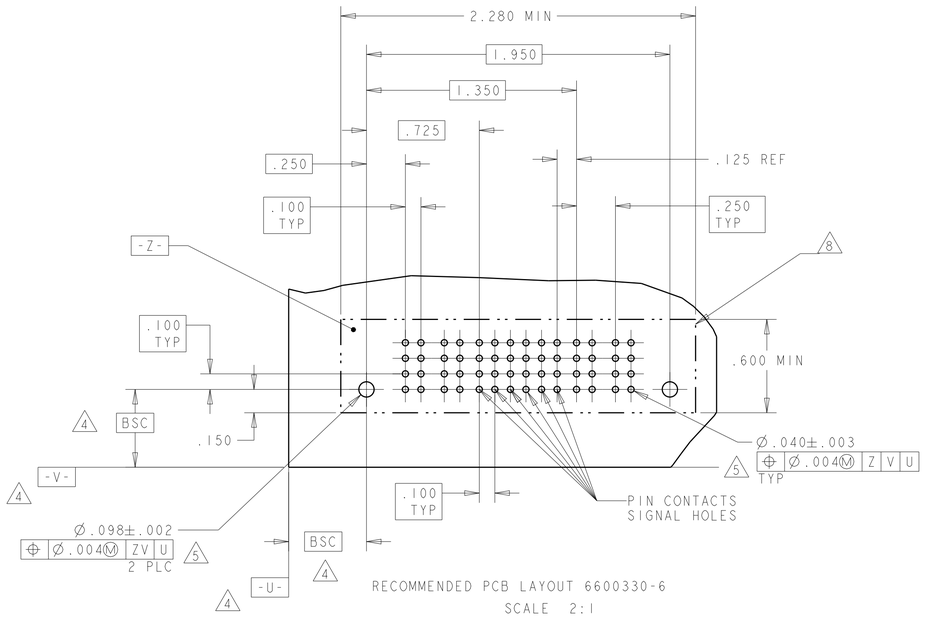


RECOMMENDED PCB LAYOUT 6600330-6
SCALE 2:1


| PART NUMBER | ROWS | | POWER P1 | P2 | P3 | P4 | SIGNAL 1 | 2 | 3 | 4 | 5 | 6 | POWER P5 | P6 | P7 | P8 | P9 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 6600330-8 | D | | SZ | SZ | SZ | SZ | SS | SV | SS | SV | SV | | SZ | SZ | SZ | SZ | SZ | |
| | C | | | | | | SV | SV | SV | SS | SV | | | | | | | |
| | B | | | | | | SV | SS | SV | SV | SV | | | | | | | |
| | A | | | | | | SS | SS | SV | SV | SS | | | | | | | |
| 4P+24S+5P | | HD | | | | | | | | | | | | | | | | HD |

NO CONTACTS LOADED

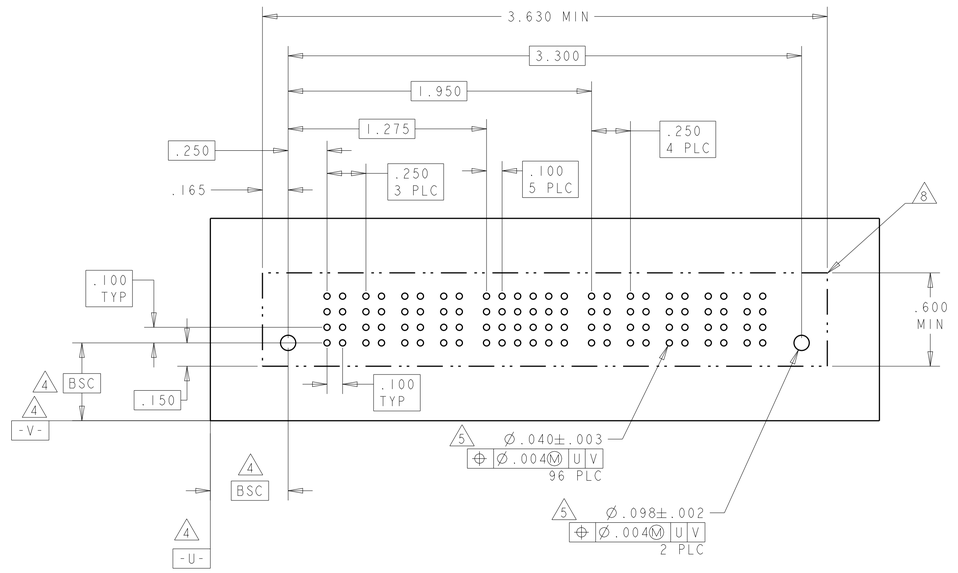


RECOMMENDED PCB LAYOUT FOR 6600330-8

| PART NUMBER | ROWS | | POWER P1 | P2 | P3 | P4 | SIGNAL 1 | 2 | 3 | 4 | 5 | 6 | POWER P5 | P6 | P7 | P8 | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 6600330-9 | D | | SZ | SZ | SZ | SZ | SV | SV | SV | SV | SV | SV | SZ | SZ | SZ | SZ | |
| | C | | | | | | SV | SV | SV | SV | SV | SV | | | | | |
| | B | | | | | | SV | SV | SV | SV | SV | SV | | | | | |
| | A | | | | | | SV | SV | SV | SV | SV | SV | | | | | |
| 4P+24S+4P | | | | | | | | | | | | | | | | | |

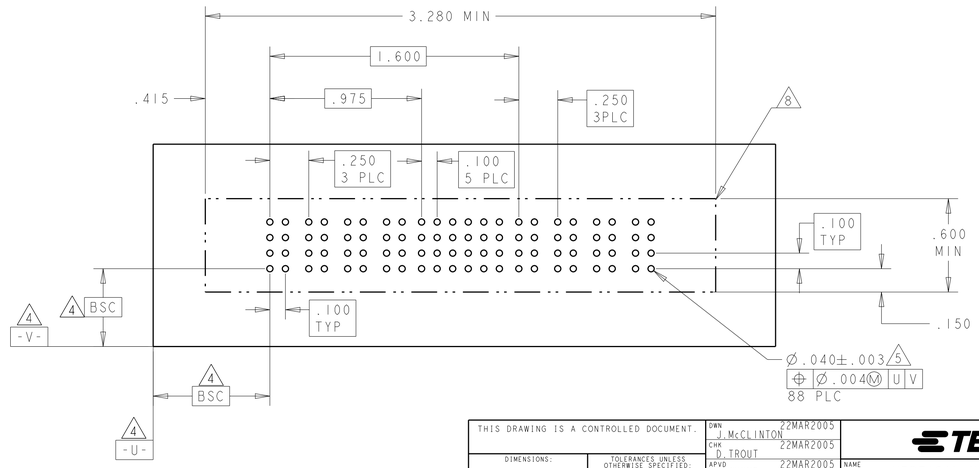


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -
FINISH - -

DWN J. McCLINTON 22MAR2005
CHK D. TROUT 22MAR2005
APVD R. WHYNE 22MAR2005
PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 4 OF 10 | REV J7


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| PART NUMBER | ROWS | | POWER | | | | | | | | | SIGNAL | | | | | | POWER | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | P3 | P4 | P5 | P6 | P7 | P8 | P9 | 1 | 2 | 3 | 4 | 5 | 6 | P10 | P11 | P12 | P13 | P14 | P15 | P16 | P17 | P18 | |
| 1-6600330-0 | D | | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SV | SV | SV | SV | SV | SV | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | SZ | |
| | C | | | | | | | | | | | SV | SV | SV | SV | SV | SV | | | | | | | | | | |
| | B | | | | | | | | | | | SV | SV | SV | SV | SV | SV | | | | | | | | | | |
| | A | | | | | | | | | | | SV | SV | SV | SV | SV | SV | | | | | | | | | | |
| 9P+24S+9P | | HD | | | | | | | | | | | | | | | | | | | | | | | | | HD |

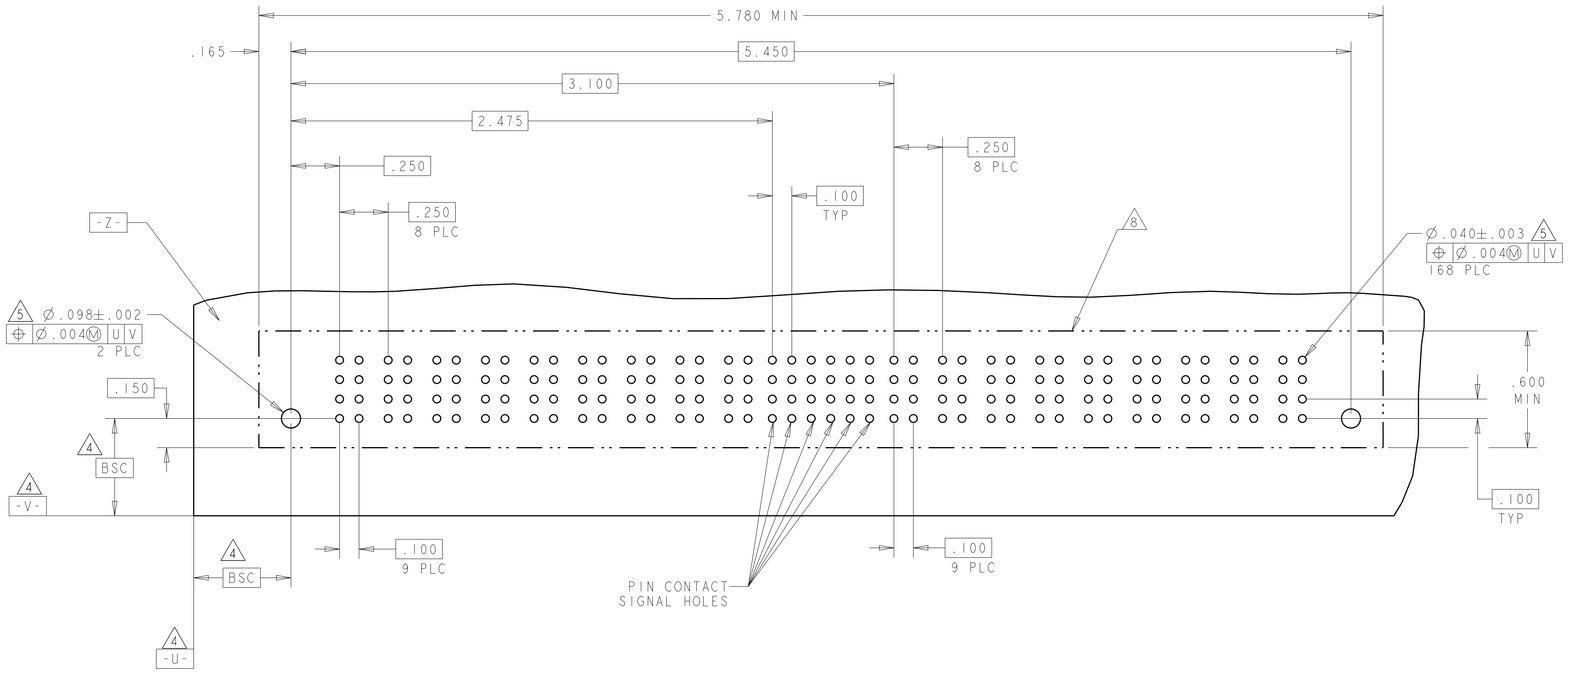


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -
FINISH - -

DWN J.McCLINTON 22MAR2005
CHK D.TROUT 22MAR2005
APVD R.WHYNE 22MAR2005
PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 5 OF 10 | REV J7


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| PART NUMBER | ROWS | | POWER | | | | | | SIGNAL | | | | | | POWER | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | P3 | P4 | P5 | P6 | 1 | 2 | 3 | 4 | 5 | 6 | P7 | P8 | P9 | P10 | P11 | P12 | |
| 1-6600330-1 | D | | SZ | SZ | SZ | SZ | SZ | SZ | SV | SV | SV | SV | SV | SV | SZ | SZ | SZ | SZ | SZ | SZ | |
| | C | | | | | | | | SS | SS | SS | SS | SS | SS | | | | | | | |
| | B | | | | | | | | SS | SS | SS | SS | SS | SS | | | | | | | |
| | A | | | | | | | | SS | SS | SS | SS | SS | SS | | | | | | | |
| 6ACP+24S+6ACP | | HD | | | | | | | | | | | | | | | | | | | HD |

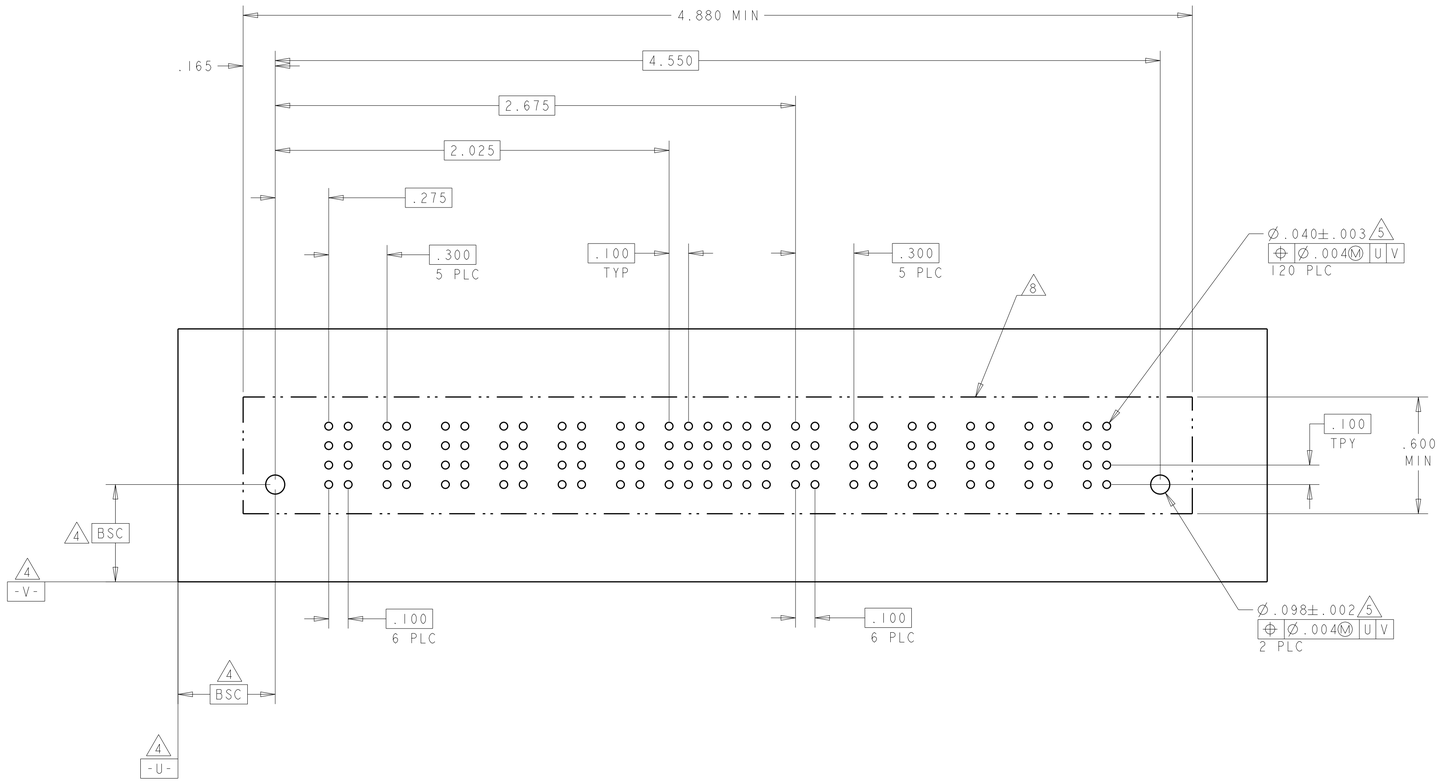


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -

FINISH - -

DWN J.McCLINTON 22MAR2005
CHK D.TROUT 22MAR2005
APVD R.WHYNE 22MAR2005

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING SCALE 4:1 SHEET 6 OF 10 REV J7

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |


REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| PART NUMBER | ROWS | | POWER | | | SIGNAL | | | | | | POWER | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | P3 | 1 | 2 | 3 | 4 | 5 | 6 | P4 | P5 | P6 | |
| 1-6600330-2 | D | | SZ | SZ | SZ | SV | SV | SV | SV | SV | SV | SZ | SZ | SZ | |
| | C | | | | | SV | SV | SV | SV | SV | SV | | | | |
| | B | | | | | SV | SV | SV | SV | SV | SV | | | | |
| | A | HD | | | | SV | SV | SV | SV | SV | SV | | | | HD |
| 3P + 24S + 3P | | | | | | | | | | | | | | | |

F2

| PART NUMBER | ROWS | | POWER | | SIGNAL | | | | | | | | | | | | POWER | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | P3 | P4 | |
| 1-6600330-3 | D | | SZ | SZ | SV | SV | SS | SS | SV | SS | SS | SV | SS | SS | SV | SV | SZ | SZ | |
| | C | | | | SS | SS | SV | SS | SS | SS | SS | SV | SS | SS | SS | SS | | | |
| | B | | | | SV | SV | SS | SS | SS | SS | SS | SS | SV | SS | SS | SS | | | |
| | A | HD | | | SS | SS | SV | SS | SS | SS | SS | SV | SS | SS | SS | SS | | | HD |
| 2HDP + 48S + 2HDP | | | | | | | | | | | | | | | | | | | |

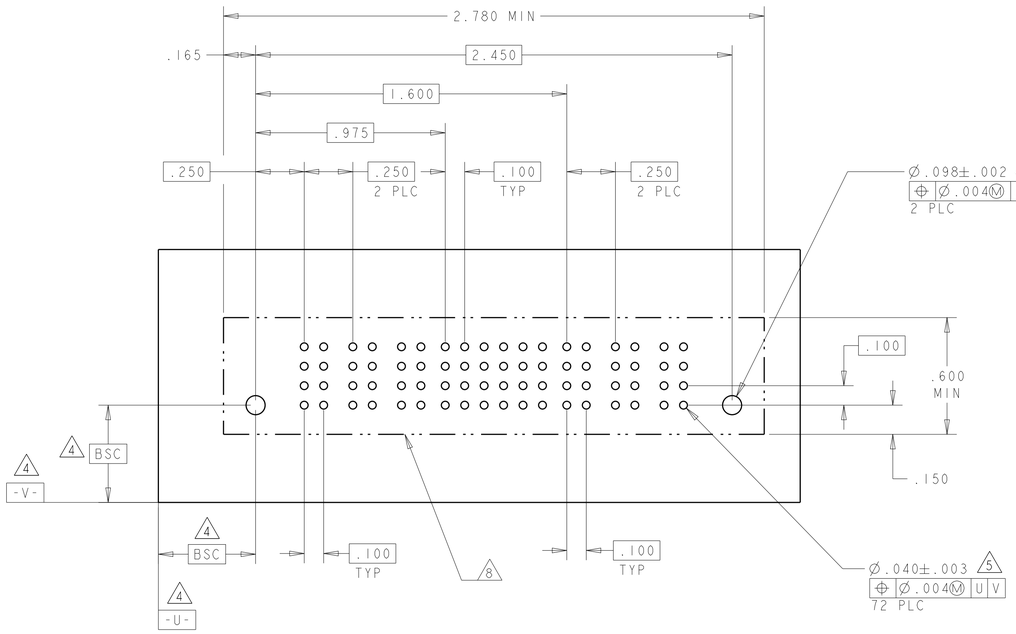

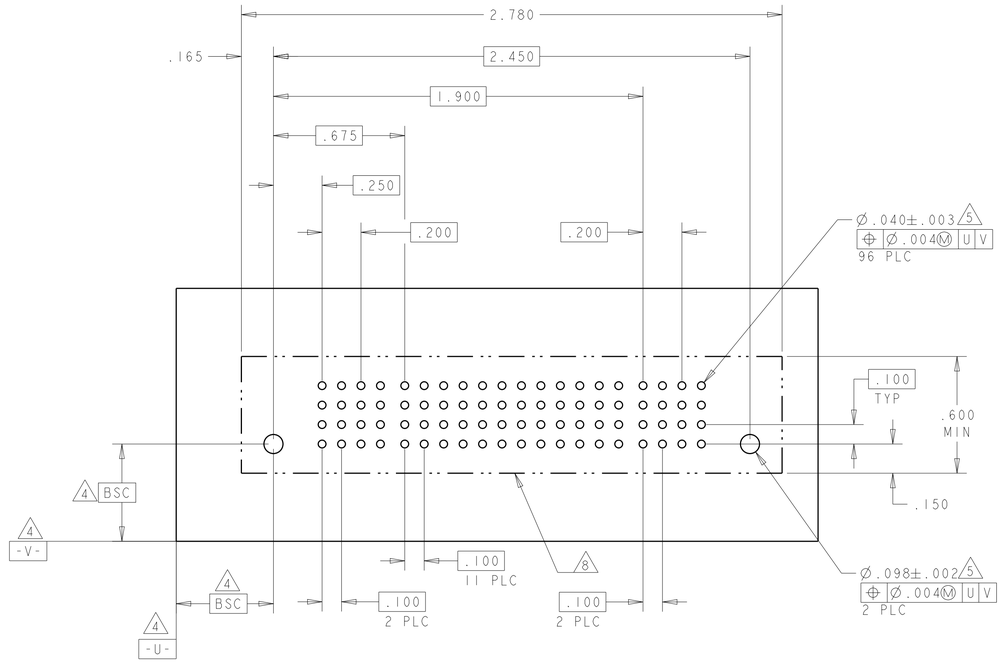
THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -

FINISH - -

| | |
|---|---|
| DWN J.McCLINTON | 22MAR2005 |
| CHK D.TROUT | 22MAR2005 |
| APVD R.WHYNE | 22MAR2005 |
| PRODUCT SPEC | 108-1973 |
| APPLICATION SPEC | 114-13038 |
| WEIGHT - | |

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 7 OF 10 | REV J7

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |

REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |


(H)

| PART NUMBER | ROWS | | POWER | | | | SIGNAL | | | | | | POWER | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | P3 | P4 | 1 | 2 | 3 | 4 | 5 | 6 | P5 | P6 | P7 | P8 | |
| 1-6600330-9 | D | | SZ | SZ | SZ | SZ | SS | SS | SS | SS | SV | SS | SZ | SZ | SZ | SZ | |
| | C | | | | | | SS | SS | SS | SS | SV | SS | | | | | |
| | B | | | | | | SS | SS | SS | SS | SV | SS | | | | | |
| | A | | | | | | SS | SS | SV | SS | SV | SS | | | | | |
| 4P+24S+4P | | HD | | | | | | | | | | | | | | | HD |

(J)

| PART NUMBER | ROWS | | POWER | | | | SIGNAL | | | | | | | | | POWER | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | P3 | P4 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | P5 | P6 | P7 | P8 | |
| 2-6600330-0 | D | | SZ | SZ | SZ | SZ | SV | SV | SV | SV | SV | SV | SV | SV | SV | SZ | SZ | SZ | SZ | |
| | C | | | | | | SV | SV | SV | SV | SV | SV | SV | SV | SV | | | | | |
| | B | | | | | | SV | SV | SV | SV | SV | SV | SV | SV | SV | | | | | |
| | A | | | | | | SV | SV | SV | SV | SV | SV | SV | SV | SV | | | | | |
| 4P+36S+4P | | HD | | | | | | | | | | | | | | | | | | HD |

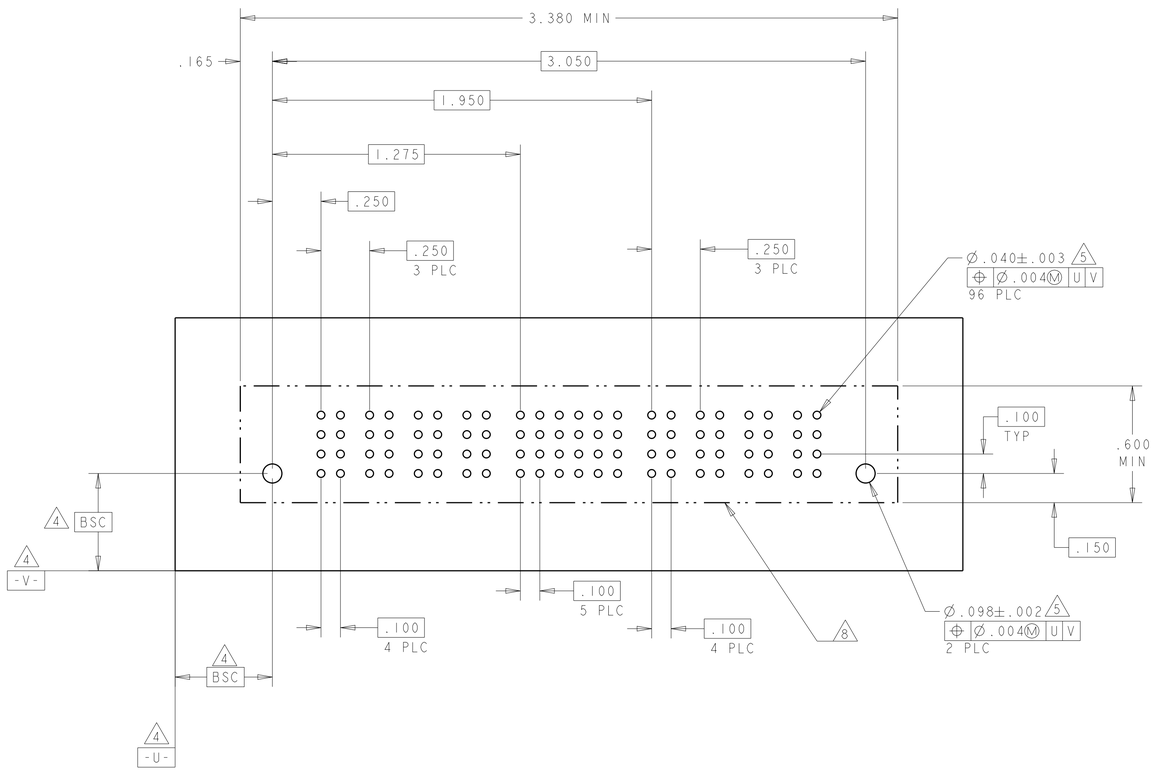

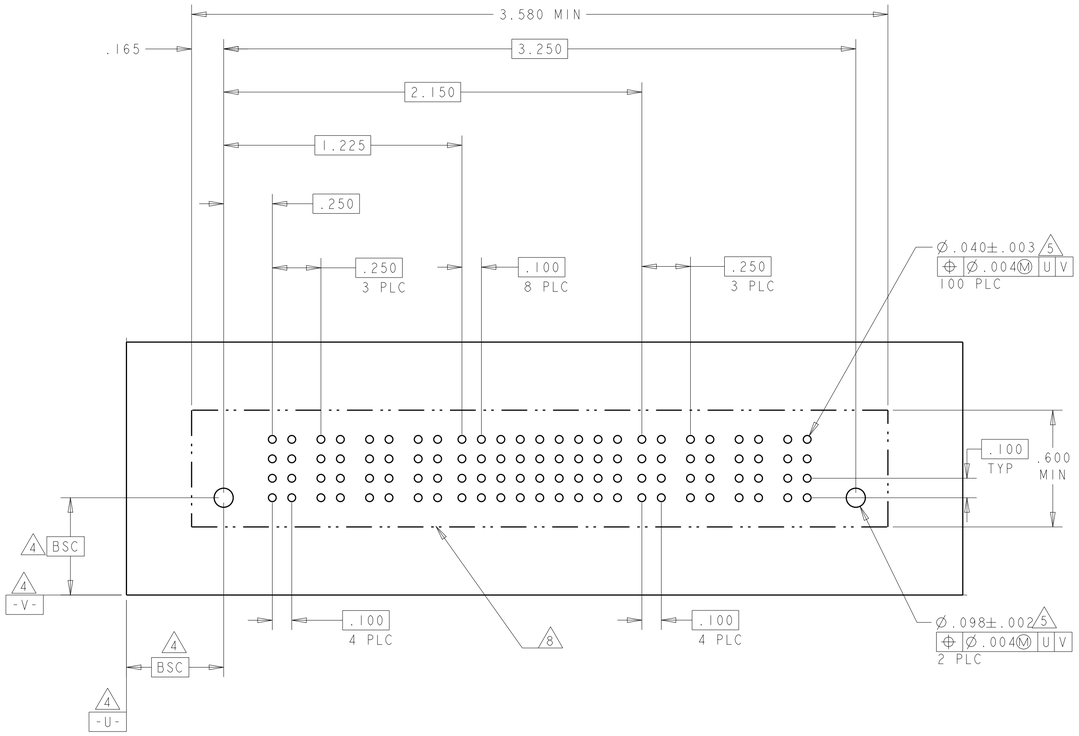
THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -
FINISH - -

DWN J.McCLINTON 22MAR2005
CHK D.TROUT 22MAR2005
APVD R.WHYNE 22MAR2005
PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

CUSTOMER DRAWING

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

SCALE 4:1 SHEET 8 OF 10 REV J7

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |


REVISIONS


| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| PART NUMBER | ROWS | | POWER | | SIGNAL | | | POWER | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | P2 | 1 | 2 | 3 | P3 | P4 | |
| 2-6600330-1 | D | | SZ | SZ | SV | SV | SV | SZ | SZ | |
| | C | | | | SV | SV | SV | | | |
| | B | | | | SV | SV | SV | | | |
| | A | HD | | | SV | SV | SV | | | HD |
| 2P + 12S + 2P | | | | | | | | | | |

J3

| PART NUMBER | ROWS | | SIGNAL | |
|---|---|---|---|---|
| | | | 1 | |
| 2-6600330-3 | D | | SV | |
| | C | | SV | |
| | B | | SV | |
| | A | | SV | |
| 4S | | HD | | HD |

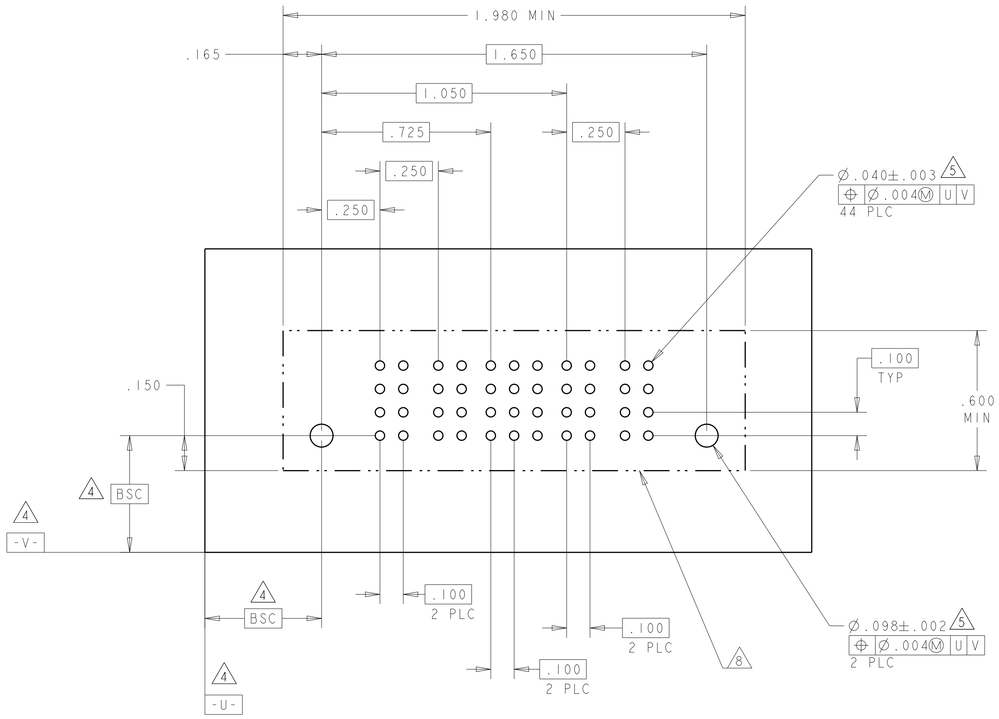

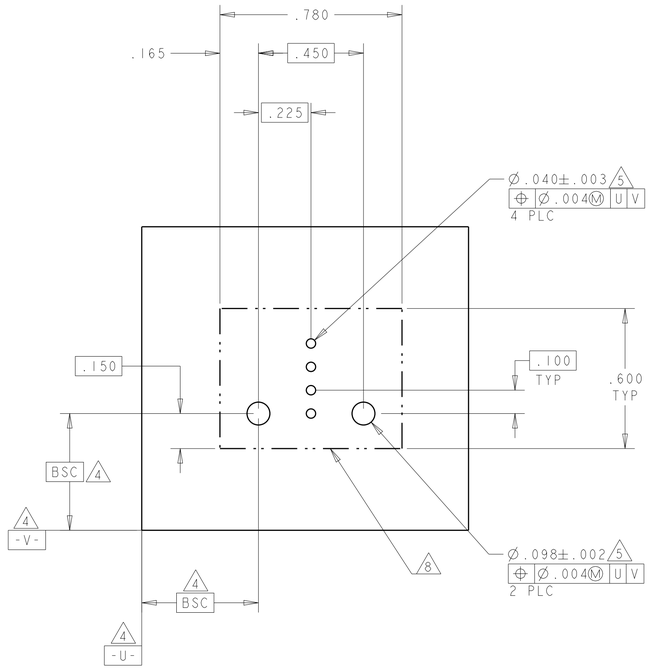
THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -
FINISH - -

| | | |
|---|---|---|
| DWN | J.McCLINTON | 22MAR2005 |
| CHK | D.TROUT | 22MAR2005 |
| APVD | R.WHYNE | 22MAR2005 |
| PRODUCT SPEC | 108-1973 | |
| APPLICATION SPEC | 114-13038 | |
| WEIGHT | - | |

TE Connectivity

NAME: VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING | SCALE 4:1 | SHEET 9 OF 10 | REV J7


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 TE CONNECTIVITY ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| ES | 00 |


REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | - | SEE SHEET 1 | - | - | - |

| PART NUMBER | ROWS | | POWER | SIGNAL | | | | | POWER | |
|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | 1 | 2 | 3 | 4 | 5 | P2 | |
| 2-6600330-4 | D | | SZ | SV | SV | SV | SV | SV | SZ | |
| | C | | | SV | SV | SV | SV | SV | | |
| | B | | | SV | SV | SV | SV | SV | | |
| | A | | | SV | SV | SV | SV | SV | | |
| IP+20S+IP | | HD | | | | | | | | HD |

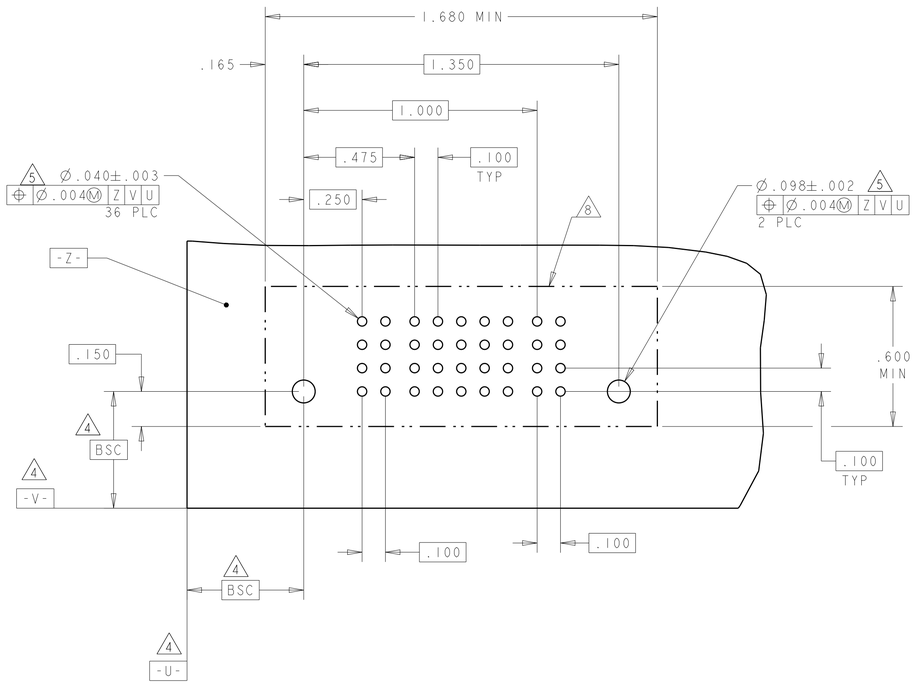


| PART NUMBER | ROWS | | POWER | SIGNAL | | | | | | | | POWER | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | P1 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | P2 | |
| 2-6600330-5 | D | | SZ | SV | SV | SV | SV | SV | SV | SV | SV | SZ | |
| | C | | | SV | SV | SV | SV | SV | SV | SV | SV | | |
| | B | | | SV | SV | SV | SV | SV | SV | SV | SV | | |
| | A | | | SV | SV | SV | SV | SV | SV | SV | SV | | |
| IP+32S+IP | | HD | | | | | | | | | | | HD |

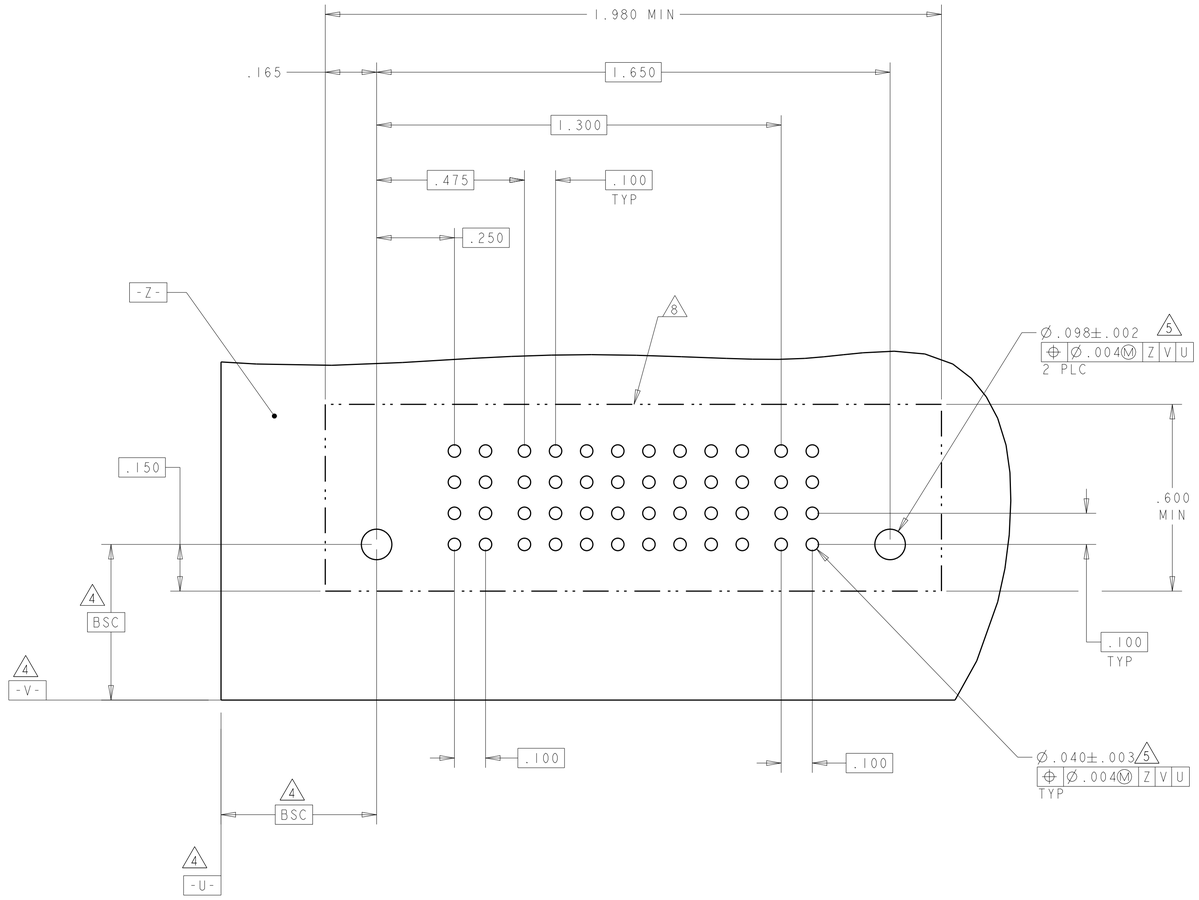


THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±.005
4 PLC ±.0020
ANGLES ±-

MATERIAL - -

FINISH - -

DWN J.McCLINTON 22MAR2005
CHK D.TROUT 22MAR2005
APVD R.WHYNE 22MAR2005

PRODUCT SPEC 108-1973
APPLICATION SPEC 114-13038
WEIGHT -

TE Connectivity

NAME VERTICAL HEADER ASSEMBLY W/ GUIDES AND SOLDER TAILS MULTI-BEAM XL

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A1 | 00779 | C-6600330 | - |

CUSTOMER DRAWING

SCALE 4:1 SHEET 10 OF 10 REV J7