
VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

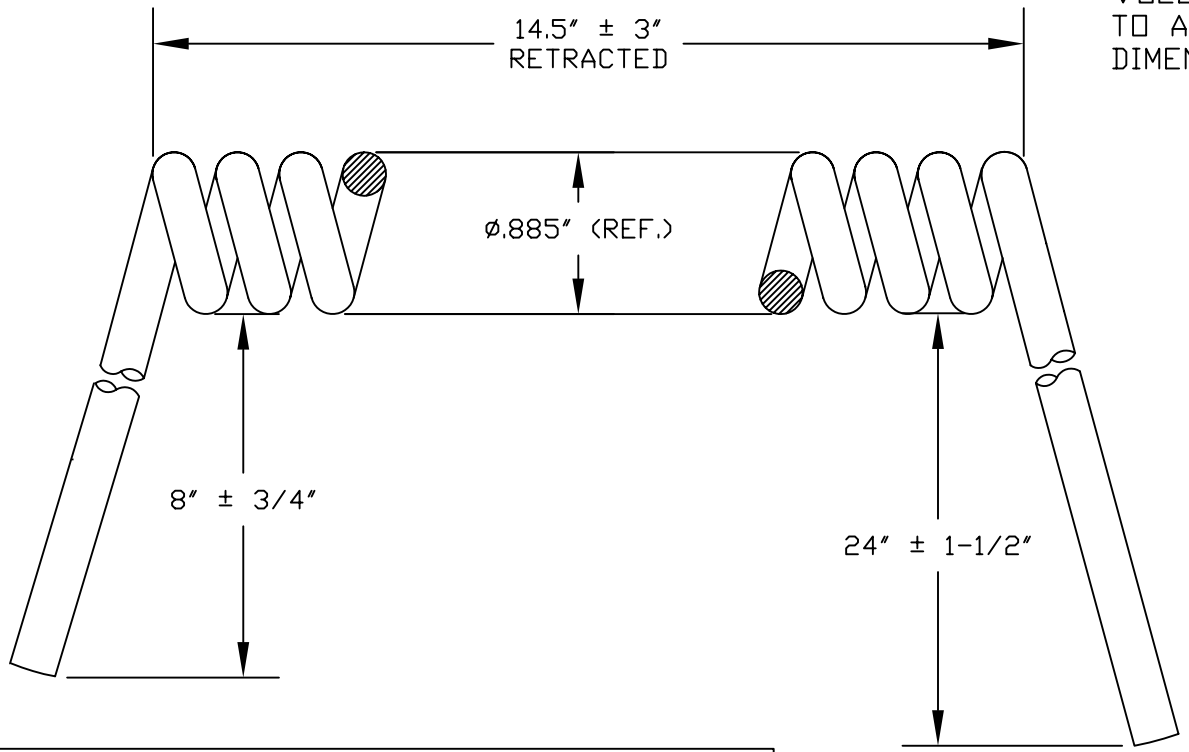

NOTES

1) CORDAGE: 26AWG, 7 CONDUCTOR, PVC, FOIL WRAP/SPIRAL SHIELD, 80°C, BLACK
2) COPPER CONDUCTOR TO BE MADE UP OF 19 STRANDS OF 38AWG TINNED COPPER.
3) JACKETED SINGLES WILL BE BLACK, WHITE, RED, GREEN, BROWN, BLUE, AND ORANGE IN COLOR.
4) CORDAGE O.D.: .250″ NOM.
5) APPROVALS: UL AWM 2464
6) RATING: 300 VOLTS
7) CARTON QTY TBD.
8) ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

REV	DESCRIPTION	DATE
1	PRELIMINARY RELEASE	12/19/08

Volex CUD

FORM IN71-07 REV.A

- ☒ Indianapolis, IN
- ☐ Conover, N.C.
- ☐ Freemont, CA
- ☐ Aguascalientes, MX
- ☐ Tijuana, Mexico
- ☐ Hermosillo, MX
- ☐ Clinton, AR
- ☐ Kanata, Canada

Proprietary Notice:

This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

ROHS COMPLIANT

FINISH: JACKET: SMOOTH

SCALE: NOT TO SCALE

ECO: N/A

TOLERANCE UNLESS OTHERWISE SPECIFIED
.XXX ± .005
.XX ± .02
.X ± .03
FRACT. ± 1/32
ANGULAR ± 1/2°

ITEM DESCRIPTION: RETRACTILE CORD - NORTH AMERICAN

APPROVED	DRAWN BY	DATE:
MAF	MAF	12/19/08

PART NO. 6665

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Volex:

6665 10 1