HMC712ALP3CE

v02.0617

GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, 5 - 26.5 GHz

Typical Applications

The HMC712ALP3CE is ideal for:

- Point-to-Point Radio
- VSAT Radio
- Test Instrumentation
- Microwave Sensors
- Military, ECM & Radar

Features

Wide Bandwidth: 5 - 26.5 GHz

Excellent Linearity: +28 dBm Input P1dB


Wide Attenuation Range: 28 dB

Absorptive Topology

Singe or Dual Control Operation

16 Lead 3x3mm SMT Package: $9mm^2$

Functional Diagram

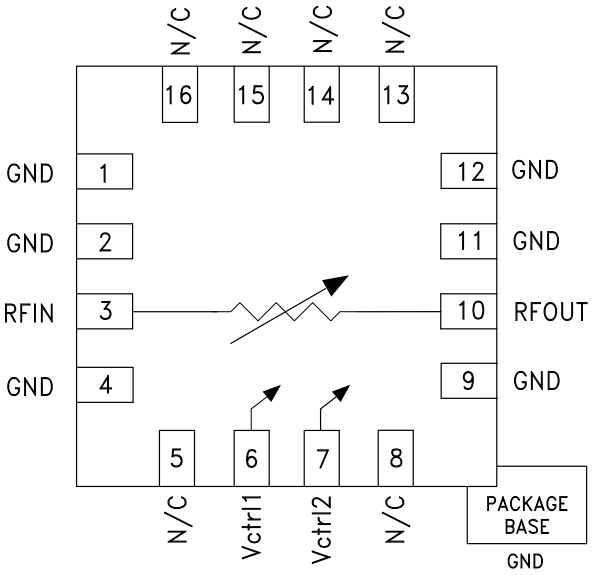

General Description

The HMC712ALP3CE is an absorptive Voltage Variable Attenuator (VVA) which operates from 5 - 26.5 GHz and is ideal in designs where an analog DC control signal must be used to control RF signal levels over a 28 dB amplitude range. It features two shunt-type attenuators which are controlled by two analog voltages, Vctrl1 and Vctrl2. Optimum linearity performance of the attenuator is achieved by first varying Vctrl1 of the 1st attenuation stage from -5V to 0V with Vctrl2 fixed at -5V. The control voltage of the 2nd attenuation stage, Vctrl2, should then be varied from -5V to 0V, with Vctrl1 fixed at 0V. The HMC712ALP3CE is housed in a RoHS compliant 3x3 mm QFN leadless package

Furthermore, if the Vctrl1 and Vctrl2 pins are connected together it is possible to achieve the full analog attenuation range with only a small degradation in input IP3 performance. Applications include AGC circuits and temperature compensation of multiple gain stages in microwave point-to-point and VSAT radios.


Electrical Specifications, T_A = +25° C, 50 Ohm system

Parameter		Min.	Typ.	Max.	Units
Insertion Loss	5 - 10 GHz 10 - 15 GHz 15 - 26.5 GHz		2.3 3 4.2	3.5 4 5.7	dB dB dB
Attenuation Range	5 - 10 GHz 10 - 15 GHz 15 - 26.5 GHz	19 21 23	27 32 37		dB dB dB
Input Return Loss			12		dB
Output Return Loss			10		dB
Input Power for 1 dB Compression (any attenuation)			28		dBm
Input Third Order Intercept (Two-tone Input Power = 10 dBm Each Tone)			32		dBm


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
Phone: 781-329-4700 • Order online at www.analog.com
Application Support: Phone: 1-800-ANALOG-D


Attenuation vs. Frequency over Vctrl
Vctrl1 = Variable, Vctrl2 = -5V

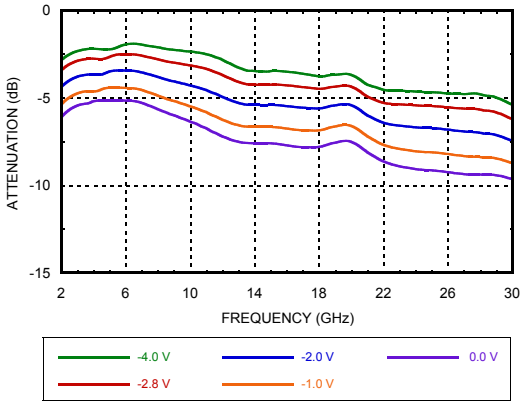


Attenuation vs. Frequency over Vctrl
Vctrl1 = 0V, Vctrl2 = Variable

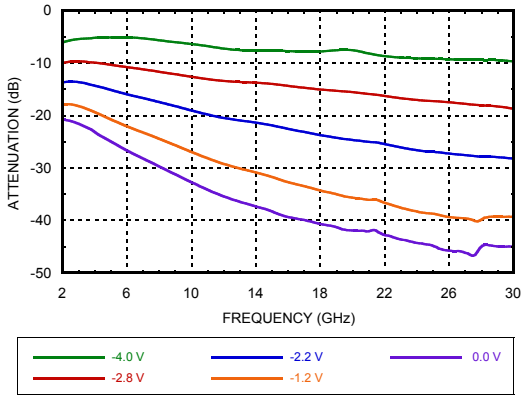


Attenuation vs. Vctrl1
Over Temperature @ 10 GHz, Vctrl2 = -5V

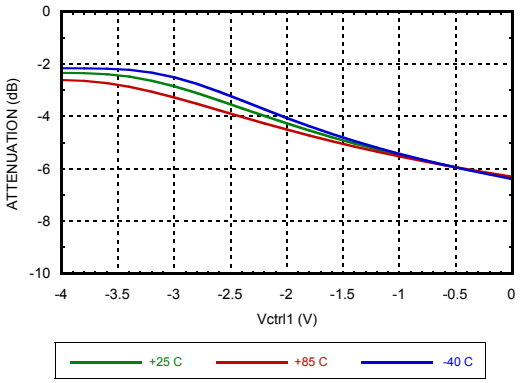


Attenuation vs. Vctrl2
Over Temperature @ 10 GHz, Vctrl1 = 0V

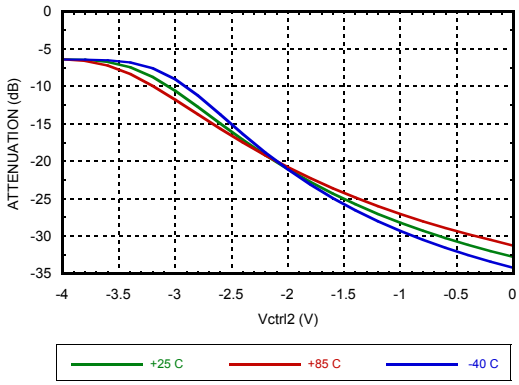


Attenuation vs. Pin @ 10 GHz
Vctrl1 = Variable, Vctrl2 = -5V

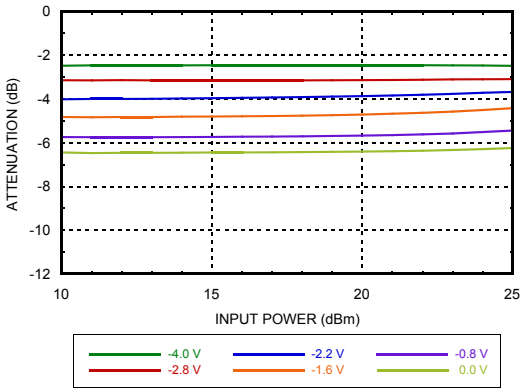


Insertion Phase vs. Vctrl1, Vctrl2 = -5V

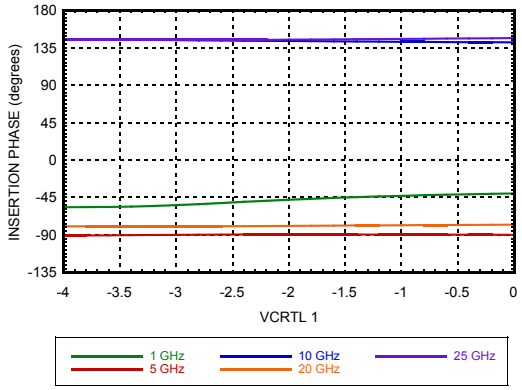


Insertion Phase vs. Vctrl2, Vctrl1 = 0V

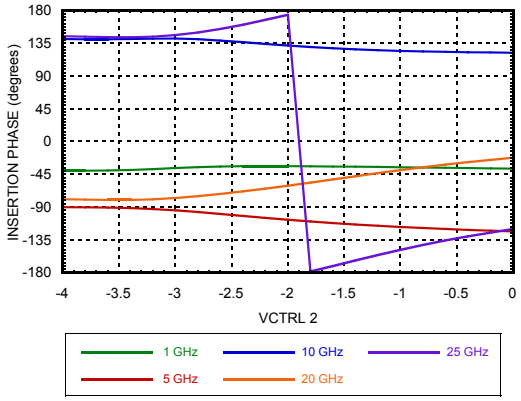


Input Return Loss
Vctrl1 = Variable, Vctrl2 = -5V

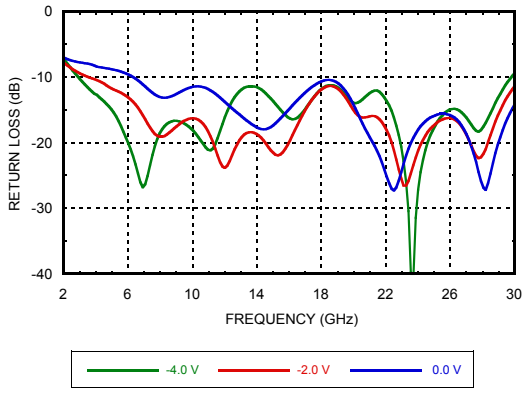


Input Return Loss
Vctrl1 = 0V, Vctrl2 = Variable

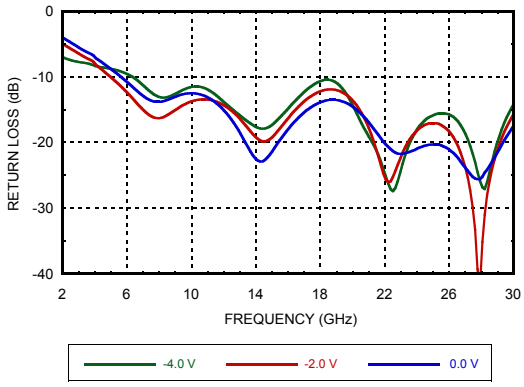


Output Return Loss
Vctrl1 = Variable, Vctrl2 = -5V

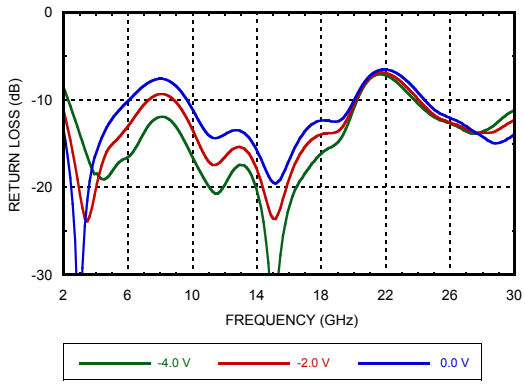


Output Return Loss
Vctrl1 = 0V, Vctrl2 = Variable

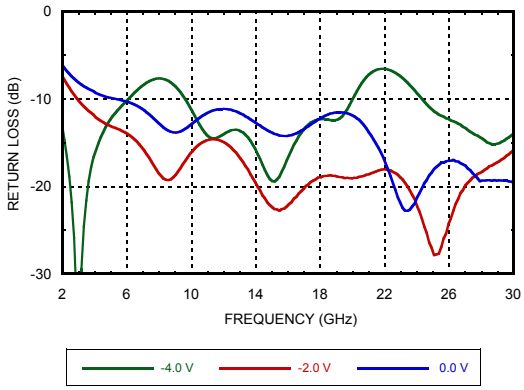


Input IP3 vs Input Power @ 10 GHz Vctrl1 = Variable, Vctrl2 = -5V

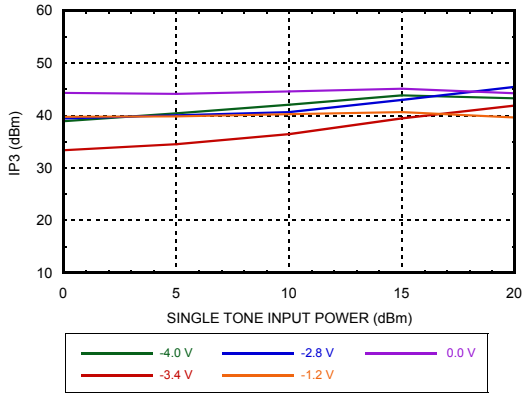


Input IP3 vs. Input Power Over Frequency Vctrl1 = -2.0V, Vctrl2 = -5V (Worst Case IP3)

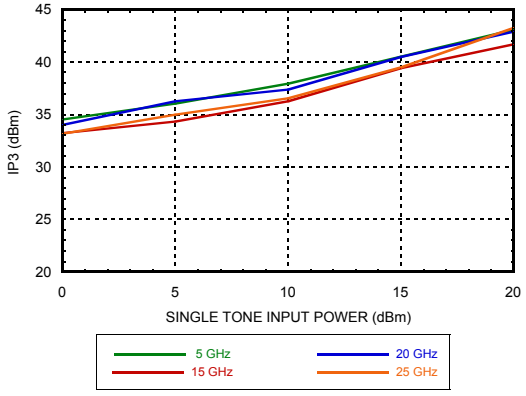


Input IP3 vs. Input Power Over Temperature @ 10 GHz, Vctrl1 = -2.0V, Vctrl2 = -5V

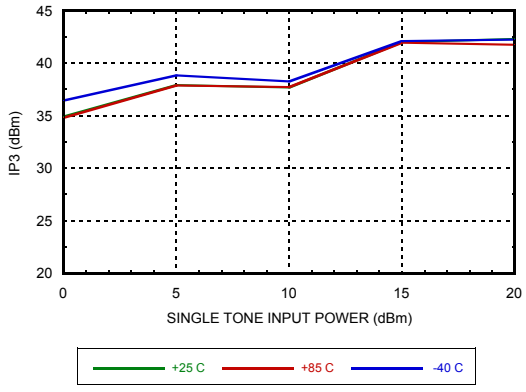


Attenuation vs. Frequency over Vctrl Vctrl1 = Vctrl2

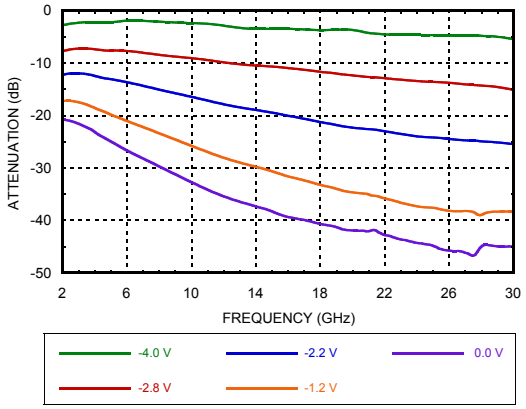

Attenuation vs. Vctrl over Temperature @ 10 GHz, Vctrl1 = Vctrl2

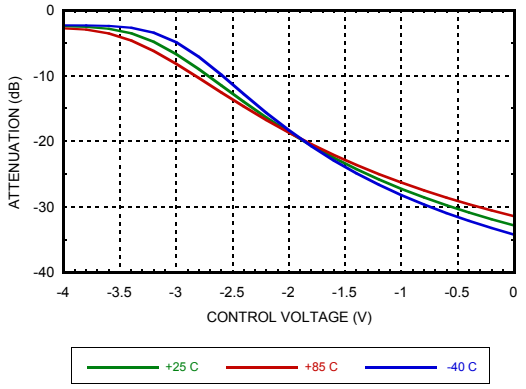


Attenuation vs. Input Power over Vctrl Vctrl1 = Vctrl2

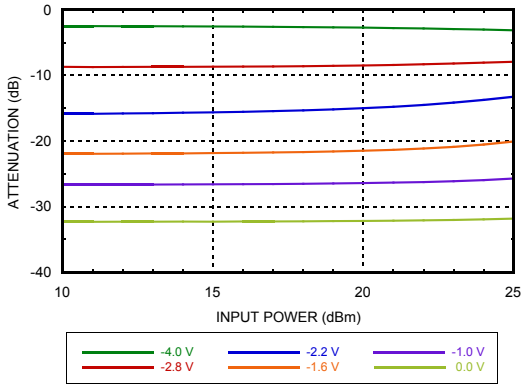


GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, 5 - 26.5 GHz


Input Return Loss, Vctrl1 = Vctrl2

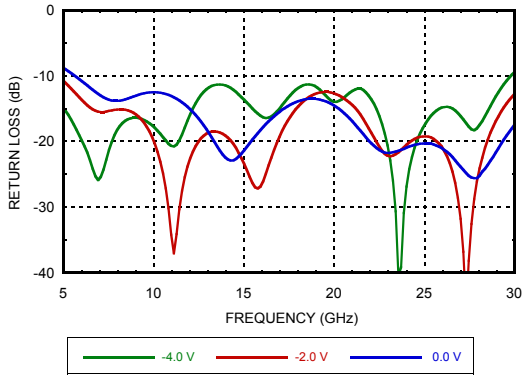

Output Return Loss, Vctrl1 = Vctrl2

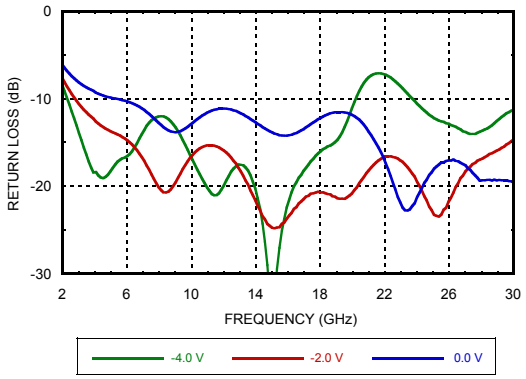

Input IP3 vs. Input Power Over Vctrl @ 10 GHz, Vctrl1 = Vctrl2

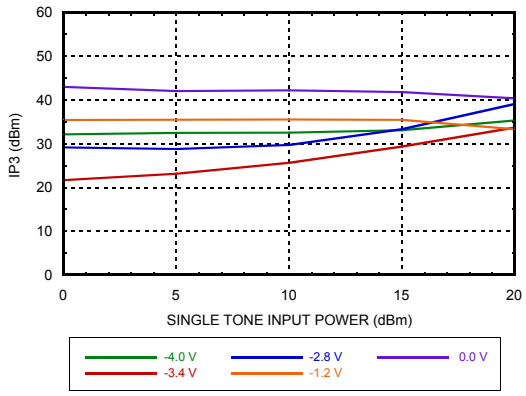

Absolute Maximum Ratings


RF Input Power	+30 dBm
Control Voltage Range	+0.3 to -6V
Channel Temperature	175 °C
Continuous Pdiss (T = 85 °C)	1W
Thermal Resistance (Channel to ground paddle)	66 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HBM)	Class 0 (Passed 150V)

Control Voltages

Vctrl1	-5 to 0V @ 10 µA
Vctrl2	-5 to 0V @ 10 µA

ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

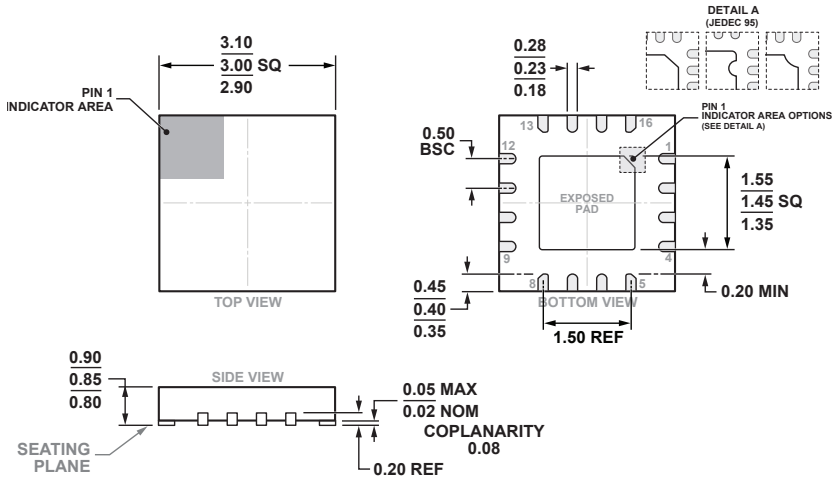

COMPLIANT WITH JEDEC STANDARDS MO-220-VEED-4





16-Lead Lead Frame Chip Scale Package [LFCSP]
3 x 3 mm Body and 0.85 mm Package Height
(CP-16-52)
Dimensions shown in millimeters

Package Information


Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking [1]
HMC712ALP3CE	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL3 [2]	H712A XXXX

[1] 4-Digit lot number XXXX
[2] Max peak reflow temperature of 260 °C


Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1, 2, 4, 9, 11, 12 Ground Paddle	GND	Ground paddle must be connected to RF/DC ground.	
3	RFIN	This pin is DC coupled and matched to 50 Ohms. A blocking capacitor is required if RF line potential is not equal to 0V.	
5, 8, 13 - 16	N/C	These pins should be connected to PCB RF ground to maximize performance.	
6	Vctrl1	Control Voltage 1	
7	Vctrl2	Control Voltage 2	
10	RFOUT	This pin is DC coupled and matched to 50 Ohms. A blocking capacitor is required if RF line potential is not equal to 0V.	

Application Circuit

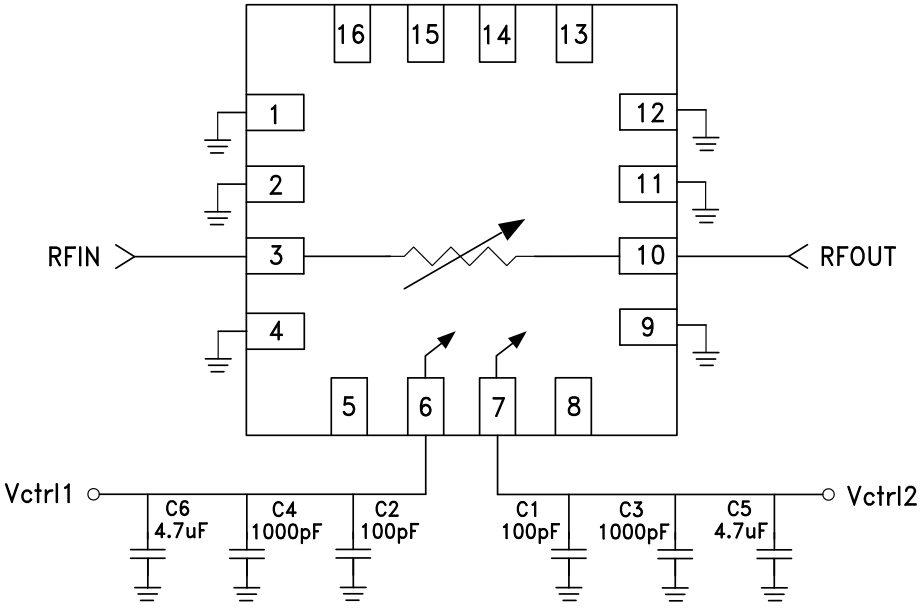

Evaluation PCB

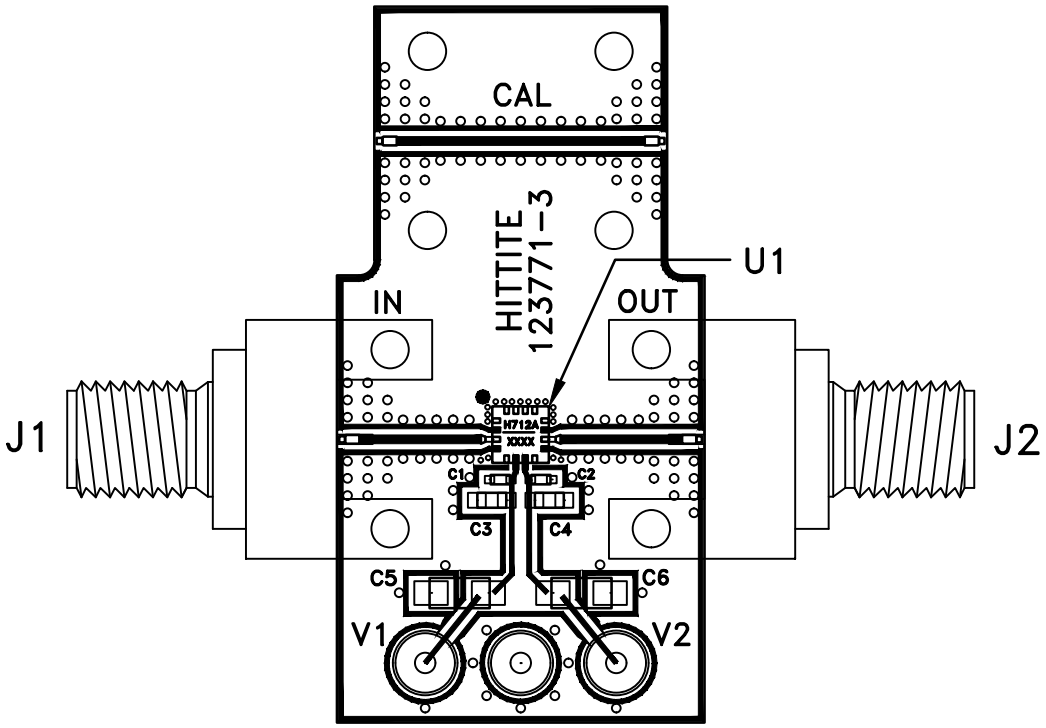

List of Materials for EV1HMC712ALP3CE [1]

Item	Description
J1, J2	PCB Mount SMA RF Connector
C1, C2	100 pF Capacitor, 0402 Pkg.
C3, C4	1000 pF Capacitor, 0603 Pkg.
C5, C6	4.7 µF Capacitor, Tantalum
V1, V2	DC Pin
U1	HMC712ALP3CE Voltage Variable Attenuator
PCB [2]	123771 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 4350

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Analog Devices upon request.