



6602,3 SERIES 6702,3 SERIES 6802,3 SERIES

FEATURES

- Type N Connectors Standard
- Options from DC to 4 GHz
- High Power, Trombone Style Coaxial Structure
- MIL Grade Materials and Processing
- -40 to +125° C Operating Temperature Range

SPECIFICATIONS

Model	6602	6702	6802	6603	6703	6803
Frequency Range (GHz)	DC-2	DC-2	DC-2	DC-4	DC-4	DC-4
Phase Shift, min (°/GHz)	290	290	290	190	190	190
Phase Shift, min (°/GHz/Shaft Turn)	5.7	5.7	5.7	5.7	3.8	5.7
Insertion Phase, Nominal @ Min Phase Setting (°/GHz)	950	950	980	790	700	820
Number of Turns, min	50	50	48	33	50	32
VSWR max	1.35	1.35	1.35	1.60	1.60	1.60
Insertion Loss, max (dB)	0.5	0.5	0.5	0.5	0.5	0.5
Power						
Average (Watts)	350	350	350	350	350	350
Peak (Watts)	2500	2500	2500	2500	2500	2500
Time Delay, Nominal @ Min Phase Setting (nsec)	2.6	2.6	2.7	2.2	1.9	2.3
Length (L)						
Inches	6.55	9.55	6.35	4.93	6.94	4.73
Centimeters	16,64	24,26	16,13	12,52	17,63	12,01
Length (L1)						
Inches	---	9.17	---	---	6.56	---
Centimeters	---	23,29	---	---	16,66	---
Weight						
Ounces	33	45	38	27	42	32
Grams	934	1274	1075	764	1188	906

NOTES:

1. 1 Degree per GHz of Phase Shift equals 2.78 picoseconds of time delay.
2. Average and Peak Power are given at ambient temperature and altitude with Type N Connectors. Power is further limited by the power threshold level of selected connector style.






API Technologies RF2M ● 8 Executive Drive ● Hudson, NH 03051

Phone: 888-553-7531 ● Fax: 603.459.1605

micro.apietech.com

OUTLINE DRAWINGS

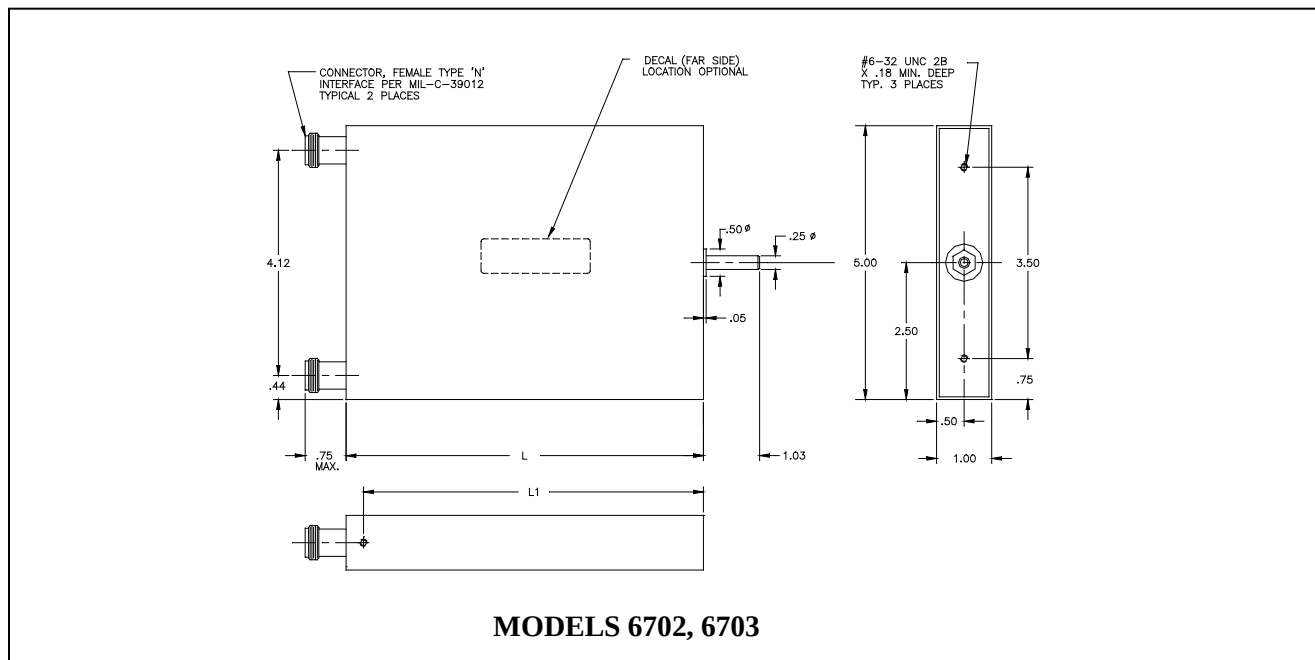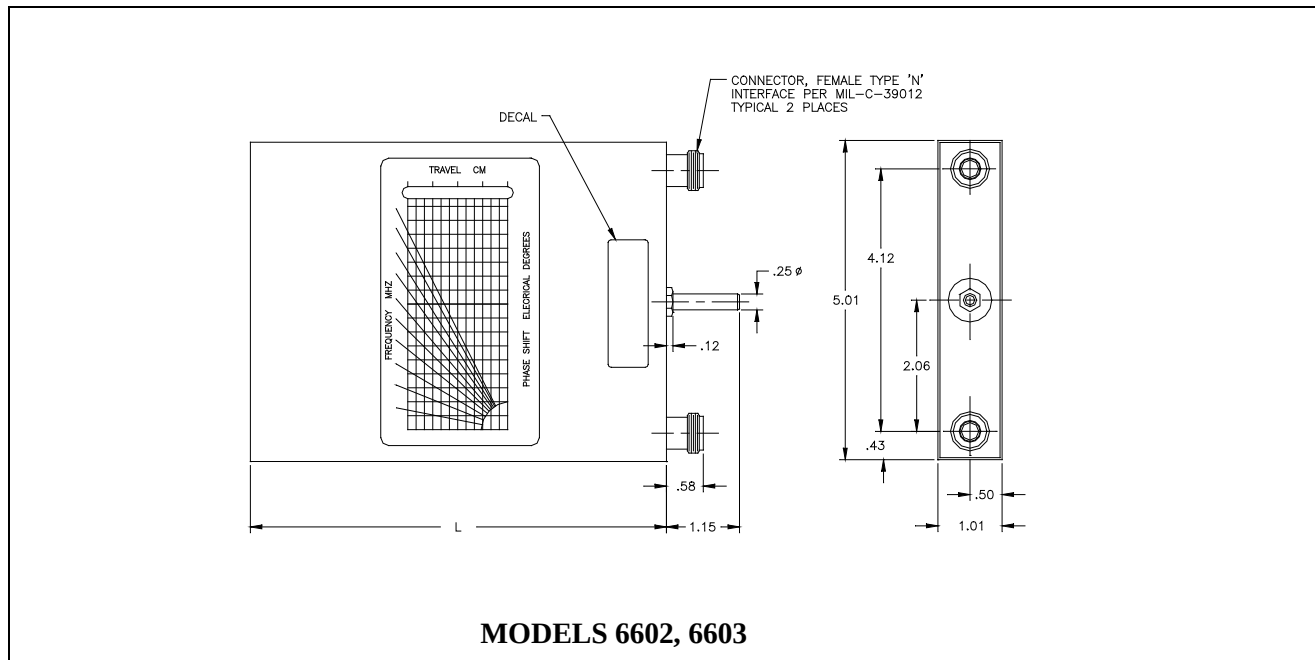

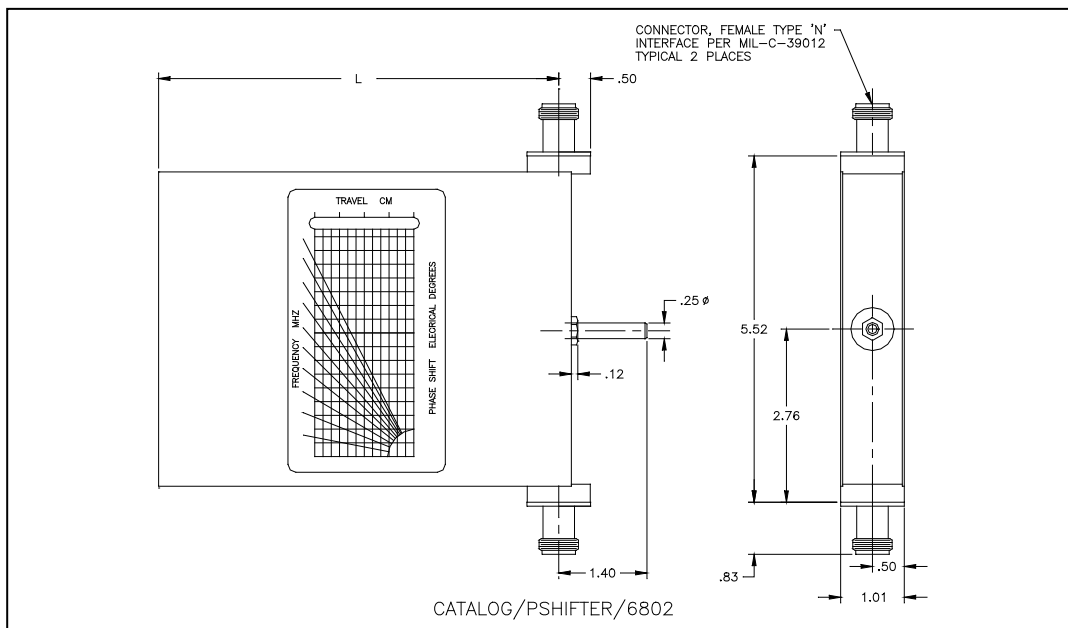

MODELS 6802, 6803

ORDERING INFORMATION

DRIVE SHAFT AND CONNECTOR OPTIONS:

- Only the following standard control options are available. The base model is available without additional options.
- Add suffix as designated below to the ordering model number.

MODEL # PLUS	DESCRIPTION
-2	Turns Counter With Built In Shaft Lock
-3	SMA Type RF Connectors
-5	Control Knob with No Locking Feature
-15	Shaft Lock With Control Knob
-135	Shaft Lock With Control Knob and SMA Type RF Connectors
-23	Turns Counter With Built In Shaft Lock and SMA Type RF Connectors.

(-1) SHAFT LOCK	(-2) TURNS COUNTER W/ SHAFT LOCK	(-5) CONTROL KNOB
		D= 0.9" L=1.0"

MISCELLANEOUS:

- API Technologies "Standard Warranty and Order Terms and Conditions" apply to all orders.
- All specifications subject to change without notice.
- Check "Ordering and Availability Listing" for delivery and ordering information.
- Contact our local Manufacturers Representative for pricing.

Specification Revision - 010813



API Technologies RF2M ● 8 Executive Drive ● Hudson, NH 03051
 Phone: 888-553-7531 ● Fax: 603.459.1605
micro.apietech.com