

26 dB DC Pass

# High Power Signal Tap

ZARC-26-12+

50Ω 100W 20 to 100 MHz

## The Big Deal

- High Power Handling, 100 W
- Excellent Mainline Loss, 0.1 dB typ.
- Excellent VSWR, 1.1:1 typ.



CASE STYLE: AW1564

## Product Overview

The ZARC-26-12+ high power signal tap is ideal for monitoring up to 100 W RF signals in SW and VHF applications. Overall dimensions are 3.00" x 2.81" x 2.03" high. The rugged aluminum alloy case features stainless steel SMA connectors and an anodized aluminum heat sink, enclosing a welded module for reliable, long-term performance.

Feature	Advantages
0.1 dB typ. mainline loss	Extremely low internal power dissipation, reducing mainline loss and internal temperature for high reliability
±0.2 dB coupling flatness	Provides highly accurate sampling of signal power
VSWR 1.1:1 typ	Excellent 50Ω impedance matching minimizes interference with signal integrity
DC Pass up to 3A	Suitable for applications using remote antenna control or other remote motorized requirements
100 W input maximum	High power capacity, combined with excellent insertion loss and VSWR, supports operation in transmitters and base stations for amateur radio, PMR, FM, broadcast TV, aviation, and military applications

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



26 dB DC Pass

# High Power Signal Tap

50Ω 100W 20 to 100 MHz

## ZARC-26-12+



CASE STYLE: AW1564

Connectors	Model
SMA	ZARC-26-12-S+

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input	100W max.
DC Current (IN-OUT)	3A

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

INPUT	1
OUTPUT	2
COUPLED	3


### Outline Drawing

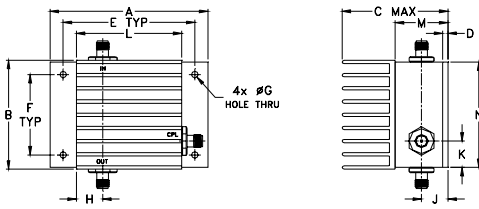

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
3.00	2.06	2.03	.10	2.500	1.525	.125
76.20	52.32	51.56	2.54	63.50	38.74	3.18
H	J	K	L	M	N	wt
.50	.50	.50	2.00	1.00	2.00	grams
12.70	12.70	12.70	50.80	25.40	50.80	230

### Electrical Schematic

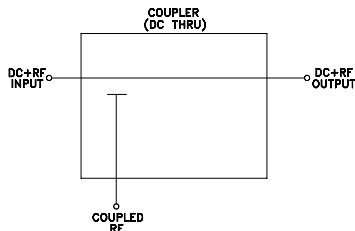

### Features

- excellent mainline loss, 0.1 dB typ.
- very flat coupling  $\pm 0.2$  dB typ.
- excellent VSWR, 1.1 typ.

### Applications

- instrumentation
- amateur radio




### Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
<b>Frequency Range</b>		20		100	MHz
<b>Mainline Loss</b> (above theoretical 0.011 dB)	20	—	0.03	0.10	dB
	60	—	0.06	0.15	
	100	—	0.10	0.20	
<b>Coupling*</b> (IN-CPL, OUT-CPL)	20 - 100		26.3		dB
	20	25.9	26.2	26.6	
	60	25.8	26.3	26.8	
<b>Coupling Flatness</b> ( $\pm$ )	20 - 60	—	0.05	0.20	dB
	60 - 100	—	0.10	0.25	
	20	25	36	—	
<b>Return Loss (Input)</b>	60	20	27	—	
	100	18	23	—	
	20	25	36	—	dB
<b>Return Loss (Output)</b>	60	20	27	—	
	100	18	23	—	
	<b>Return Loss (Coupling)</b>	20	25	45	—
60		25	34	—	
100		20	30	—	
<b>Input Power</b>	20 - 100	—	—	100	W

\* Coupling can be used for both forward and reversed direction.

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB)		Return Loss (dB)		Cpl
		In-Cpl	Out-Cpl	In	Out	
20.00	0.03	26.23	26.23	43.05	42.30	47.14
30.00	0.03	26.21	26.22	40.25	39.82	41.93
40.00	0.04	26.23	26.24	37.78	37.57	38.81
50.00	0.04	26.24	26.27	36.20	35.75	36.68
60.00	0.05	26.26	26.28	34.69	34.33	34.95
70.00	0.05	26.27	26.31	33.39	33.15	33.47
80.00	0.06	26.28	26.33	32.20	31.90	32.19
90.00	0.06	26.28	26.35	31.24	30.91	31.06
95.00	0.07	26.28	26.36	30.73	30.51	30.54
100.00	0.07	26.28	26.37	30.29	30.05	30.04

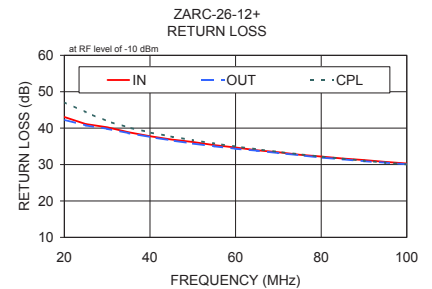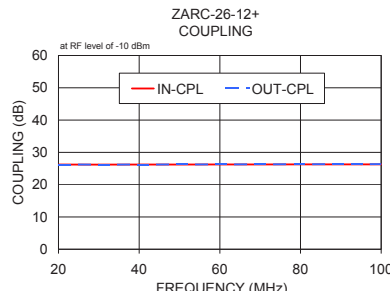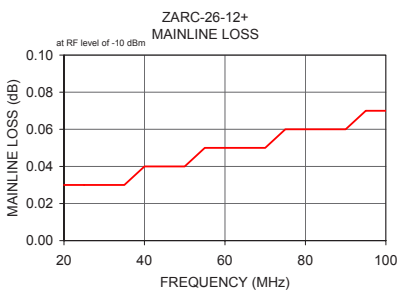

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/WCLStore/terms.jsp](http://www.minicircuits.com/WCLStore/terms.jsp)



[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A  
M151107  
ED-14165/1  
ZARC-26-12+  
CH/CP/AM  
151007  
Page 2 of 2