

Qseven® Module based on Freescale® i.MX6 ARM Processor

conga-QMX6

Up to Freescale i.MX6 Quad ARM Cortex A9 with 1.0 GHz

Multimedia Performance with HDMI & LVDS interface

Extended longevity, up to 10 years


Extended temperature

Q S E V E N



Formfactor	Qseven Rev. 2.0, 70x70 mm
CPU	Freescall® i.MX6 Solo ARM Cortex A9 up to 1.0 GHz, 512B L2 cache Freescall® i.MX6 Dual Lite ARM Cortex A9 up to 1.0 GHz, 512KB L2 cache Freescall® i.MX6 Dual ARM Cortex A9 up to 1.0GHz, 1MB L2 cache Freescall® i.MX6 Quad ARM Cortex A9 up to 1.0GHz, 1MB L2 cache Core Frequency: 1.0 Ghz for commercial grade 800 Mhz for industrial grade
DRAM	Up to 2 GByte onboard DDR3 memory, 1066 MT/s
Ethernet	1x 1 Gbit Ethernet
I/O Interfaces	5x USB 2.0 (shared with 1x USB OTG client), 1x SATA II (optional), 1x SDIO, 1x PCIe 2.0, I²C Bus, CAN Bus, SPI
Mass Storage	Onboard Solid State Drive (eMMC) up to 16 GByte (optional) Onboard MicroSD socket
Sound	I²S, AC97
Graphics	Integrated in Freescale i.MX6 Series Video (VPU), 2D Graphics (GPU2D) and 3D Graphics (GPU3D), 3D graphics with 4 shaders up to 200MT/s, dual stream 1080p/720p decoder/en- coder. OpenGL, OpenCL and OpenVG 1.1
Video Interfaces	HDMI v1.4 support supported by Qseven specification. 2x LVDS (2x 24 bit) / 1x LVDS (1x 24 bit) up to WUXGA resolution. 1920x1200 pixel and HD1080. Supports 18bit and 24bit dual channel up to WUXGA 1920x1200.
Features	Watchdog Timer I²C bus (fast mode, 400 kHz, multi-master) JTAG debug interface CAN interface Camera Interface MIPI CSI-2 on flat foil connector High Precision Real Time Clock
Embedded Software Features	U-Boot boot loader
Operating Systems	Android, Windows Embedded Compact 7, Linux BSPs with OS drivers and tools.
Power Consumption	Typ. application ~3-5 Watt @ 5V
Temperature Range	Operating: 0 to +60°C commercial grade -40 to +85°C industrial grade Storage: -40 to +85°C
Humidity	Operating: 10 to 90% r. H. non cond. Storage: 5 to 95% r. H. non cond.
Size	70 x 70 mm (2¾" x 2¾")

conga-QMX6 - Block diagram

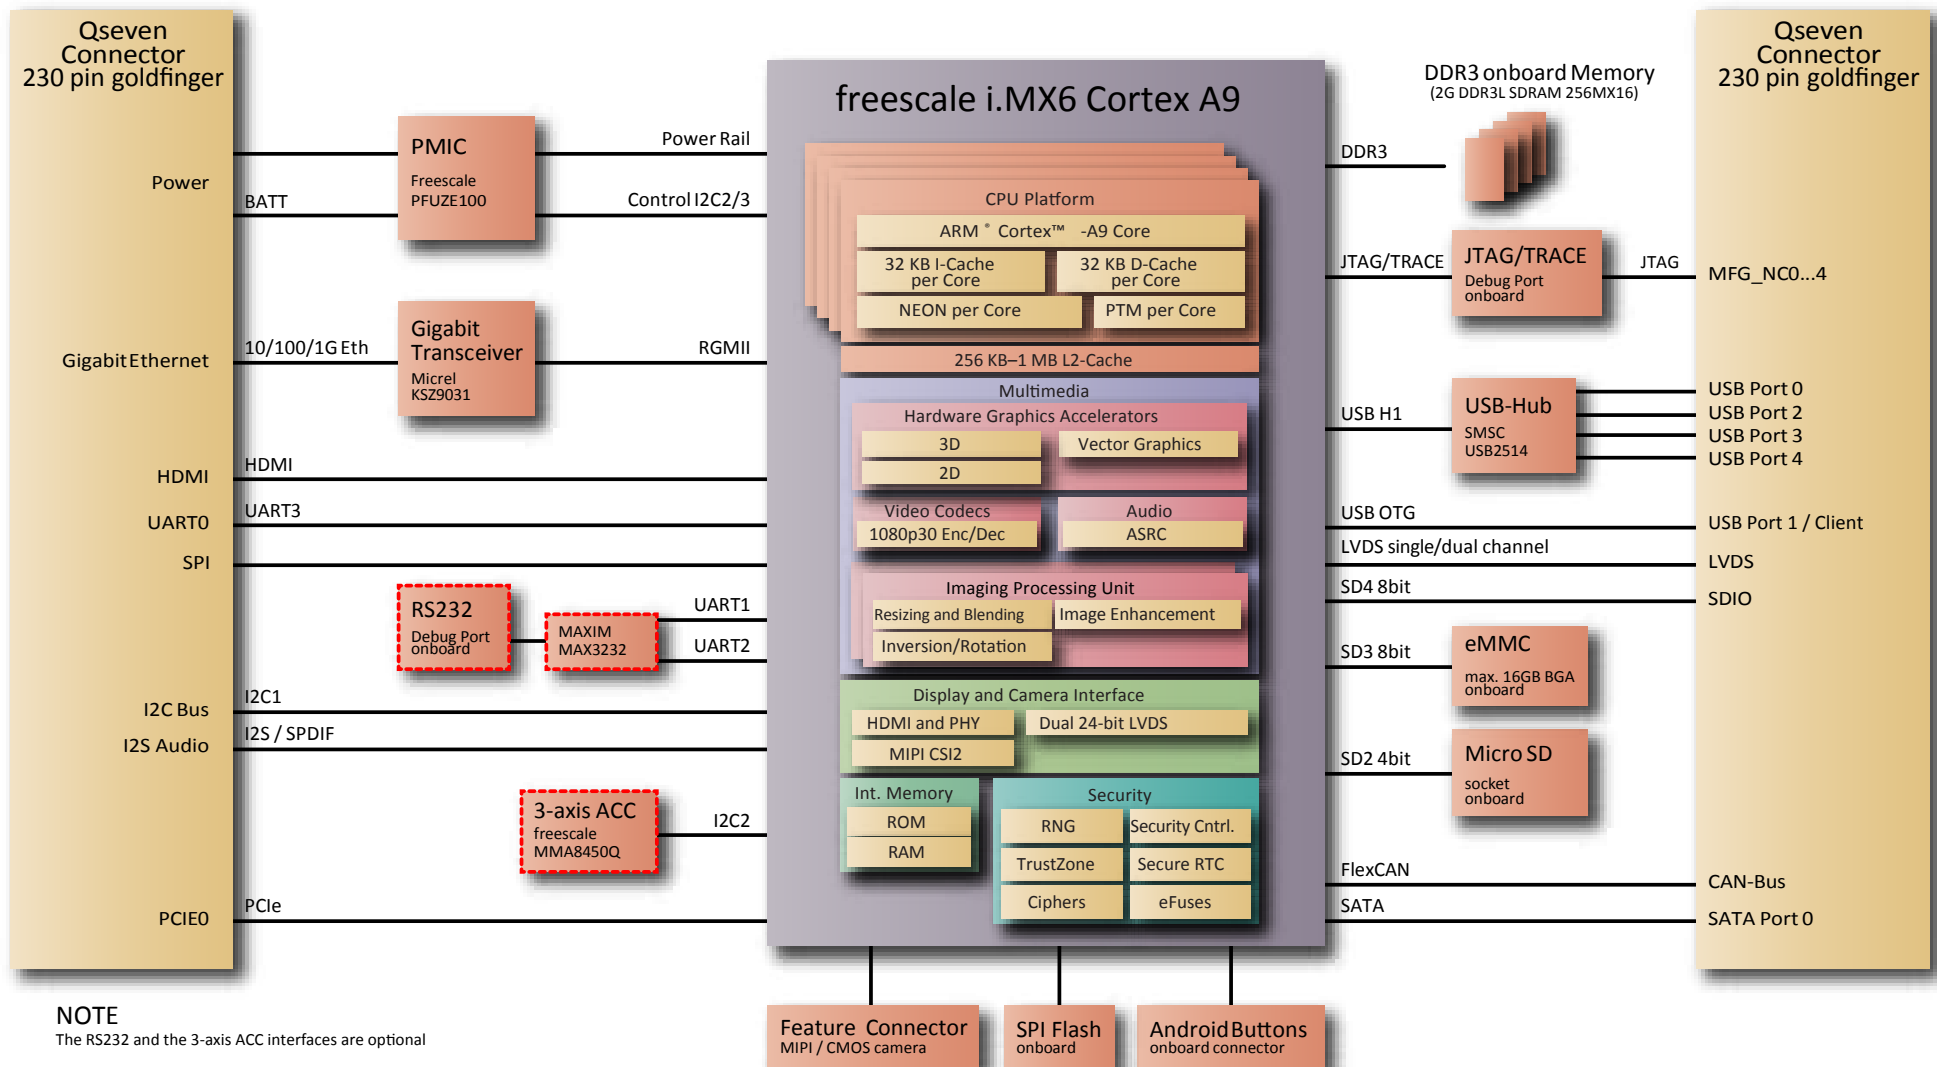

conga-QMX6 - Order information

Article	PN	Cores	Clock speed	L2 Cache	3D Graphics	2D Graphics	RAM	SATA
conga-QMX6/SC-1G eMMC4	016100	1	1 GHz (commercial temperature)	512 KB	1 shader	1 engine	1 GByte DDR3 400 Mhz	-
conga-QMX6/DCL-1G eMMC4	016101	2		512 KB	1 shader	1 engine	1 GByte DDR3 400 Mhz	-
conga-QMX6/DC-1G eMMC4	016102	2		1 MB	4 shader	2 engines	1 GByte DDR3 533 Mhz	SATA II
conga-QMX6/QC-1G eMMC4	016103	4		1 MB	4 shader	2 engines	1 GByte DDR3 533MHz	SATA II
conga-QMX6/QC-2G eMMC4	016104	4		1 MB	4 shader	2 engines	2 GByte DDR3 533MHz	SATA II
conga-QMX6/ISC-1G eMMC4	016110	1	800 MHz (industrial temperature)	512 KB	1 shader	1 engine	1 GByte DDR3 400MHz	
conga-QMX6/iDCL-1G eMMC4	016111	2		512 KB	1 shader	1 engine	1 GByte DDR3 400MHz	-
conga-QMX6/iDC-1G eMMC4	016112	2		1 MB	4 shader	2 engines	1 GByte DDR3 533MHz	SATA II
conga-QMX6/iQC-1G eMMC4	016113	4		1 MB	4 shader	2 engines	1 GByte DDR3 533MHz	SATA II
conga-QMX6/HSP1	016160	Standard heatspreader with 1mm gap pad for Qseven module conga-QMX6 for processors with LIDDED FCBGA package.						
conga-QMX6/HSP2	016161	Standard heatspreader with 2mm gap pad for Qseven module conga-QMX6 for processors with plastic MAP BGA package.						
conga-QMX6/HSP3	016162	Standard heatspreader with heat stack solution for Qseven module conga-QMX6 for processors with open silicon FCBGA package.						

Engineering Tools / Accessories for Qseven		
conga-HDMI/ADD2 Card	500025	The conga-HDMI ADD2 Card is used to connect a HDMI Display directly to the SDVO ADD2-N Slot of the QEVAL
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-QKIT/ARM	077500	Starterkit for Qseven evaluation arrier boards, including conga-QEVAL/ARM

© 2013 congatec AG. All rights reserved. All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. The products may include software. Use of the software is subject to the terms and conditions set out in the respective owner's license agreements, which are available at www.congatec.com and/or upon request. Product names, logos, brands, and other trademarks featured or referred to within this datasheet, or the congatec website, are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG, our products, or our website.
Rev. September 25, 2013 MD