



PBX LOW VOLTAGE TELEPHONE PROTECTOR

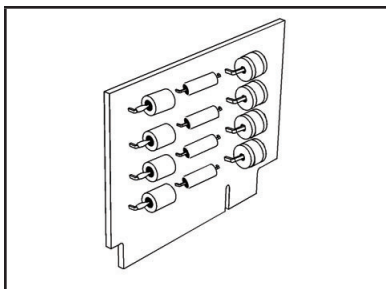

TEL50B

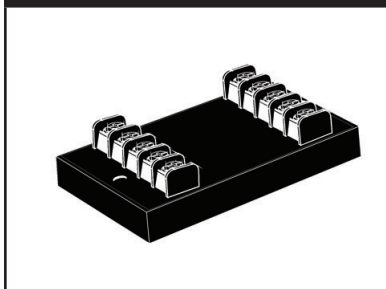

TEL50E

DESCRIPTION

The TEL50B/E is a two-stage transient voltage protector that provides primary and secondary protection against lightning, inductive switching and electrostatic discharge (ESD) transient threats. The first stage diverts the transient current through the ground terminal return path and the second stage clamps the voltage to a safe level without interruption of service.

The TEL50B/E is designed to protect telcom lines from common mode (line-to-ground) transients. There are four (4) independent lines referenced to the ground terminals.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A - 5/50ns
- Compatible with IEC 61000-4-5 (Surge): 95A, 8/20 μ s, Level 4 (Line-Gnd) & 48A, Level 4 (Line-Line)
- Designed for $\pm$ 50 Volt (Peak) Telephone Lines
- 4 Wire, Line-to-Ground Protection
- Permanent Two-Stage Protection
- Subnanosecond Response Time
- Automatic Reset - Does Not Interrupt Service
- Effective Against Lightning, Inductive Switching and ESD

APPLICATIONS

- Telcom Terminal Equipment
- Data/Telcom Interfaces
- Dedicated Fax & Modems

MECHANICAL CHARACTERISTICS

- Approximate Weight: 28 grams (TEL50B) & 142 grams (TEL50E)
- Flammability Rating UL 94V-0

TYPICAL DEVICE CHARACTERISTICS

MAXIMUM RATINGS @ 25°C Unless Otherwise Specified			
PARAMETER	SYMBOL	VALUE	UNITS
Peak Operating Line Voltage	V_{OP}	±50	Volts
Operating Line Current	I_O	200	mA
Transient Voltage	-	10	kV/Wire
Transient Current - 8/20μs waveform	-	10	kA/Wire
Transient Current - 8/20μs waveform	-	40	kA/Protector
Operating Temperature	T_A	-55 to 100	°C
Storage Temperature	T_{STG}	-55 to 100	°C
Response Time	-	< 1	ns

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified				
PART NUMBER	MAXIMUM CLAMPING VOLTAGE (8/20μs) @ ±500A V_C VOLTS	MAXIMUM LINE THROUGHPUT RESISTANCE R OHMS	MAXIMUM LEAKAGE CURRENT @ ±50V _{OP} I_D μA	MAXIMUM CAPACITANCE @ 0V, 1MHz C pF
TEL50B/E	95.0	12	5	800

INSTALLATION INSTRUCTIONS

There are five (5) terminals on both the line and equipment side of the TEL50E - four telcom line terminals and one ground terminal. The ground terminal, as shown on the label, is connected internally. A single ground connection is sufficient. However, it is recommended that both ground connections be used for a lower impedance path to earth. This connection can be made through the green AC power ground wire or a known earth ground. The ground wire should be #14 stranded wire.

Incoming telcom lines are cut or disconnected from the equipment to insert the TEL50E product. The line side of the terminals are to be connected to outside telephone or telecommunication lines that carry the transient threats into the equipment to be protected. The equipment side of the terminals are to be connected to the equipment to be protected. The location of the product should be such that these wires are as short as possible. A #18 or 20 gauge wire can be used for these connections.

The TEL50B requires an edge connector interface for installation. A standard 15 position edge connector can be used. When mounting or wiring the connectors onto a printed circuit board, be sure that the correct terminals are soldered. The line side of the board connections are finger contacts 2 thru 5. The boards are conformal coated for limited protection against moisture.

ProTek's telcom line protector is designed with a short circuit failure mode to give maximum protection. A fuse, PTC, fusible link, or circuit breaker is recommended for each signal line on the input (line) side of the protector for those applications that require an open circuit failure mode.

Caution: A low DC resistance ground may not be indicative of a good lightning ground. Lightning contains a broad spectrum of frequencies - up to 1 MHz. A low impedance path to ground at the transient frequencies is necessary. A ground strap is recommended or a #6 AWG stranded wire. For wire lengths over 1.5 meters, there may be some excessive line to earth potential under severe thunderstorm conditions. For these applications, an additional protector may be necessary at the equipment interface.


PACKAGE INFORMATION

TEL50B OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	12.7	-	0.50
B	-	76.2	-	3.0
C	-	48.2	-	1.90
D	-	7.6	-	0.30
E	-	17.8	-	0.7

NOTES


1. I/O contacts spaced at 0.156" (3.96mm) centers.

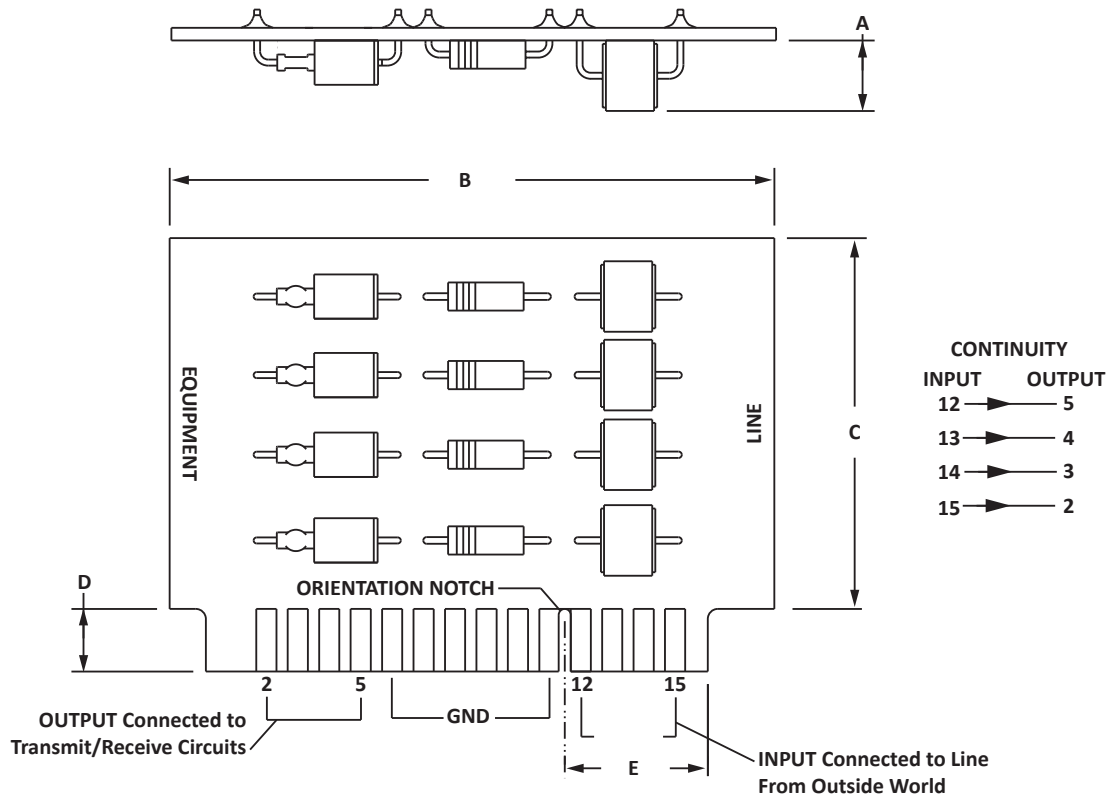

PACKAGE INFORMATION

TEL50E OUTLINE DIMENSIONS

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	95.5	-	3.8
B	82.22	82.98	3.235	3.265
C	-	57.2	-	2.25
D	-	30.2	-	1.125
E	-	15.5	-	0.61
F	-	30.2	-	1.19

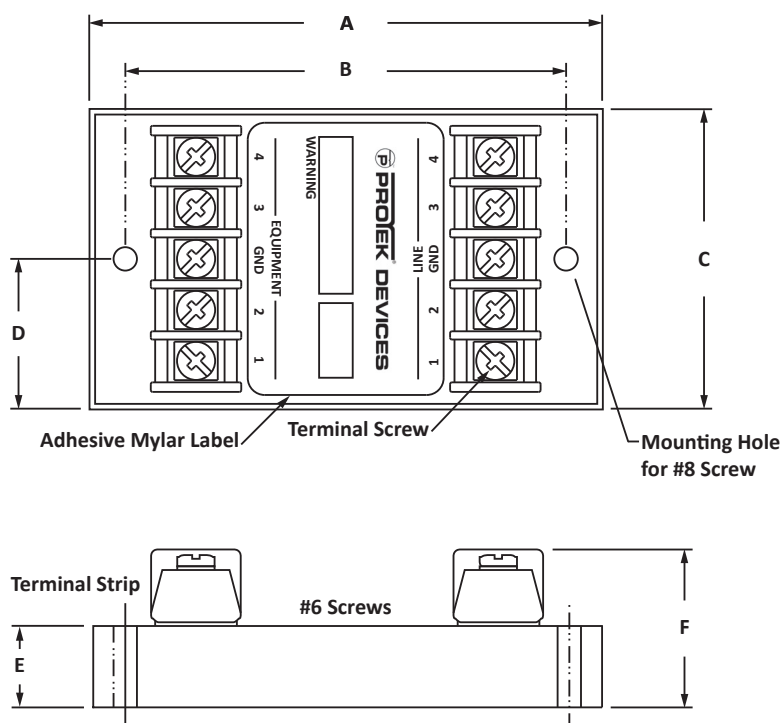

ORDERING INFORMATION

BASE PART NUMBER	MARKING
TEL50B	Logo, Date Code, Terminal Designations and Part Number
TEL50E	Logo, Date Code, Terminal Designations and Part Number

COMPANY INFORMATION

COMPANY PROFILE

ProTek Devices, based in Tempe, Arizona USA, is a manufacturer of Transient Voltage Suppression (TVS) products designed specifically for the protection of electronic systems from the effects of lightning, Electrostatic Discharge (ESD), Nuclear Electromagnetic Pulse (NEMP), inductive switching and EMI/RFI. With over 25 years of engineering and manufacturing experience, ProTek designs TVS devices that provide application specific protection solutions for all electronic equipment/systems.

ProTek Devices Analog Products Division, also manufactures analog interface, control, RF and power management products.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: 602-414-5109
Customer Service: 602-414-5114

By Fax

General: 602-431-2288

By E-mail:

Sales: sales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

Web

www.protekdevices.com
www.protekanalog.com

COPYRIGHT © ProTek Devices 1998 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.