

Product data sheet

Characteristics

70-379-1

Socket, SE Relays, 5A, 14 pins, for printed circuit board, for 782H / 792 relays,



Main

Product Range	Harmony Electromechanical Relays
Product Type	Socket
Product Compatibility	relay 792XDX relay 782XDXH
Number of Terminals	14
Switch Function	4PDT
Contact Composition	4 C/O

Complementary

Rated Current	5 A
[Ue] rated operational voltage	120 V
Contact Terminal Arrangement	Mixed
Connections Terminals	pins for printed circuit board
Fixing Mode	By screws printed circuit boards
Product Weight	0.20 oz (5.8 g)
Width	0.65 in (16.6 mm)
Depth	1.00 in (25.40 mm)

Environment

Ambient Air Temperature for Storage	-40...221 °F (-40...105 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)
Flame Retardance	UL94-V0
Product Certifications	UL CSA CE


Ordering and shipping details

GTIN	03606480277900
------	----------------

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Dimensions

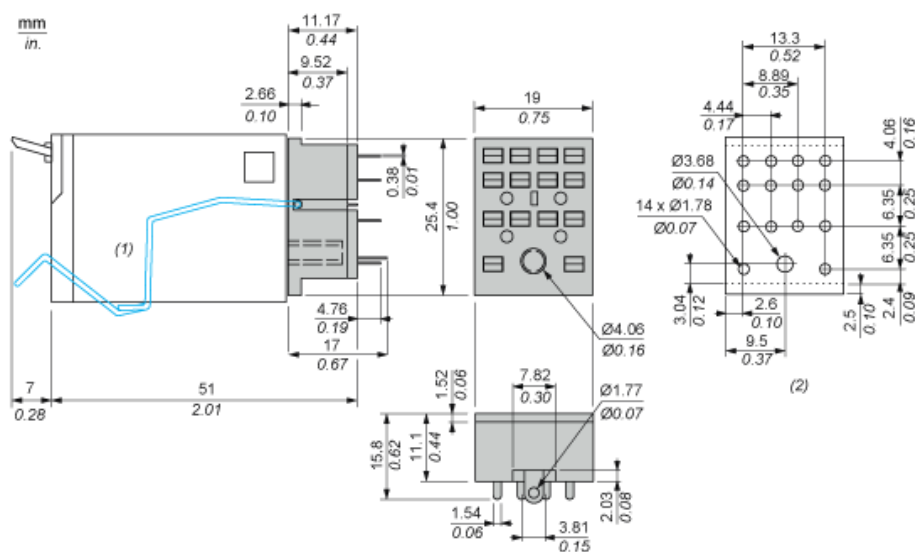

- (1) : Metal hold-down clip
(2) : Recommended circuit board layout top view

Diagram illustrating the pinout for a 16-pin NEMA IEC connector. The pins are arranged in a 4x4 grid. The pins are numbered 1 through 14, with the last two pins labeled A1 and A2. The diagram shows the pin symbols and their corresponding numbers in blue. An arrow points to the pin symbol for pin 14, which is labeled (5) in blue.

- (1) : N.C.
(2) : N.O.
(3) : COM
(4) : Input
(5) : Ground lug