

Technical Data Sheet

Electrical Specifications

Capacitance/Tolerance: 215 μ F, $\pm 10\%$


DC Voltage Rating: 900 VDC

Dielectric/Construction: Metallized Polypropylene film. Single section design

Dielectric

Withstand Voltage: Units 100% tested at a DC potential of 1125 Volts for two minutes at +25°C

ESR vs. Frequency:

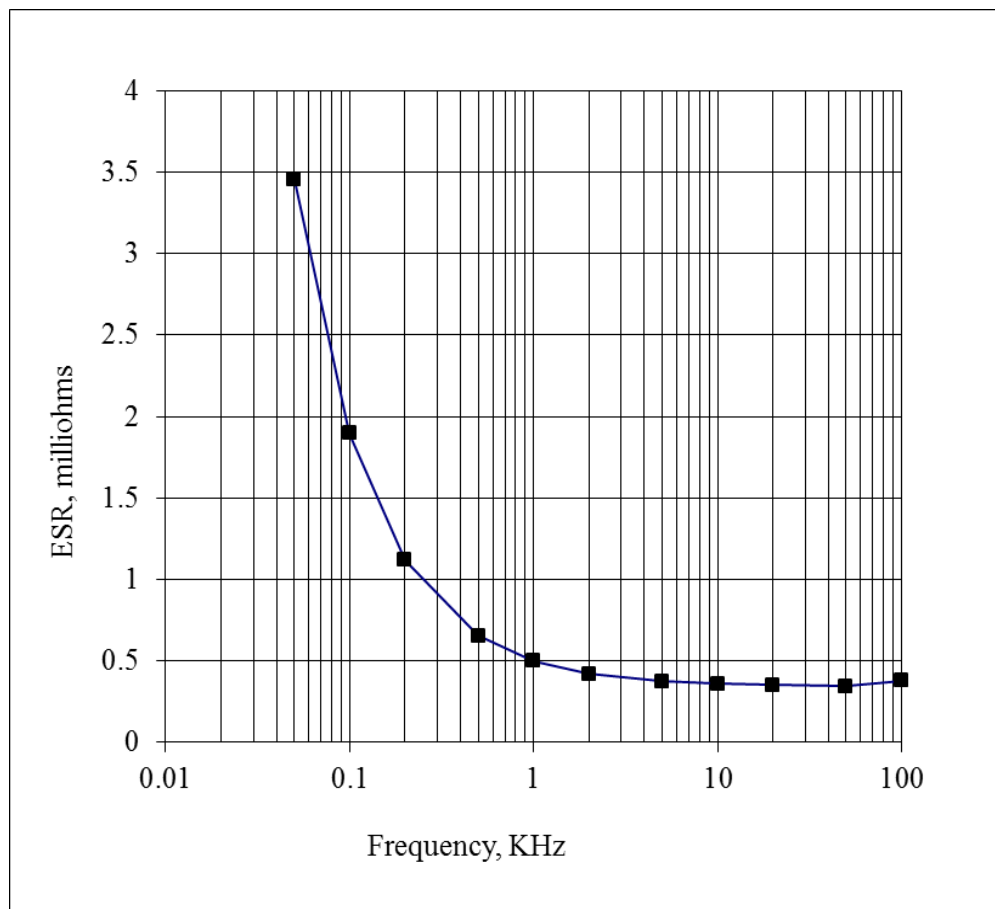

Electrical Specifications (cont'd)

ESL: Less than 5 nH in a suitable laminar bus structure


Thermal resistance: 1.48°C/W (case side cooling only)
1.09°C/W (case and bus side cooling)

Operating Temperature: -40°C to +85°C at full DC voltage rating

Voltage, Temperature De-rating: De-rate voltage linearly to 700 Volts from +85°C to +107°C, with respect to hotspot temperature


System Fault Current Rating: 10,000 Amps maximum (external to the capacitor)

RMS Current Rating:

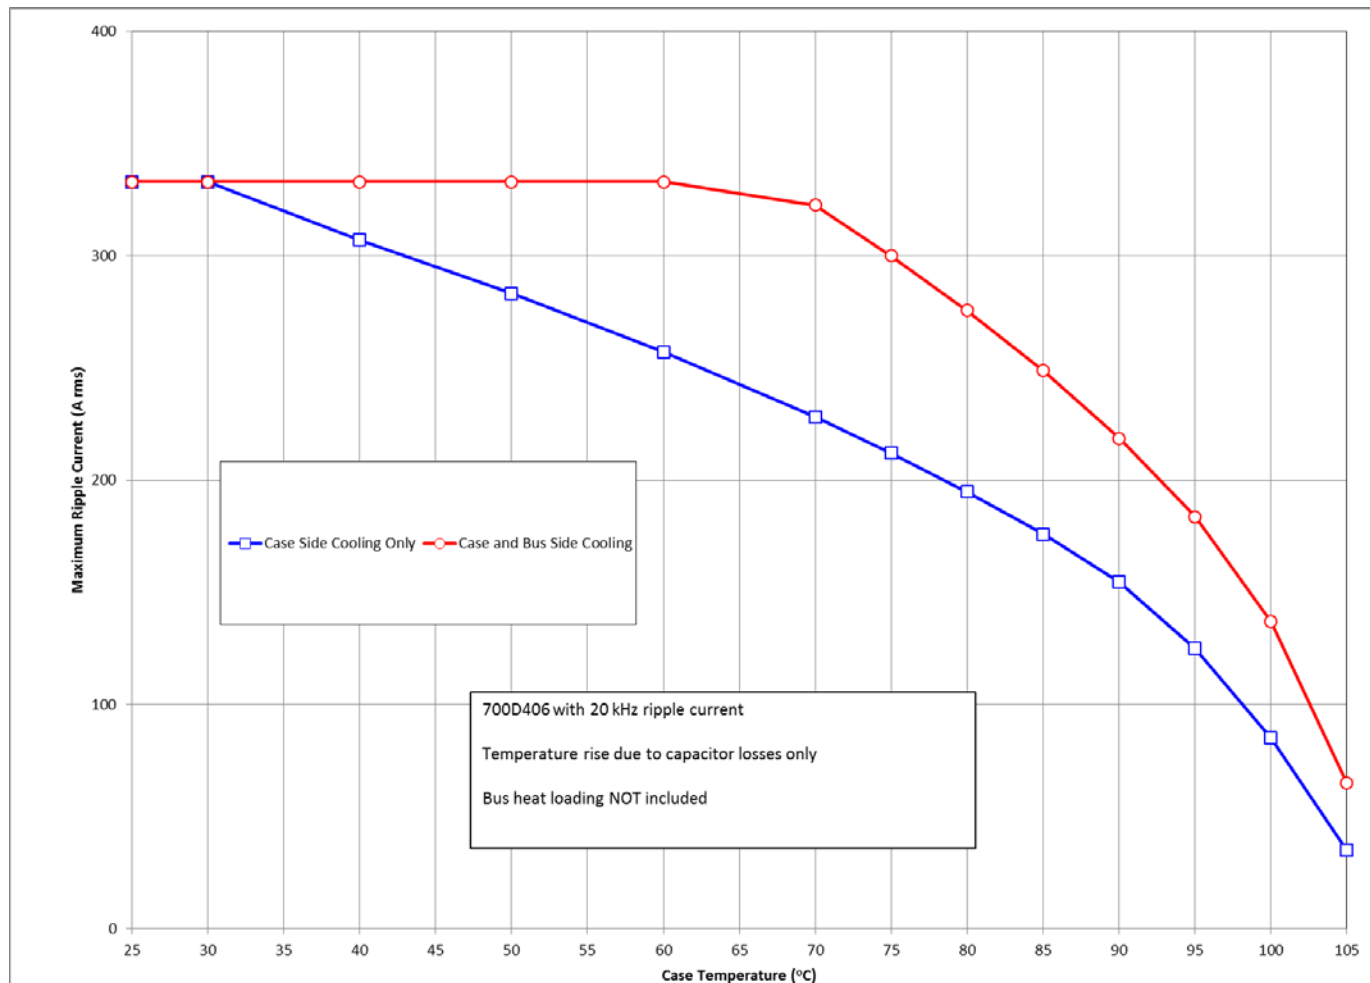

Mechanical Specifications

Dimensions:	See Layout Drawing below for details.	
Terminals:	Tin plated copper, 0.032" thick	
Encapsulation:	Molded polymeric case potted with RTV silicone	
Marking:	SBE 700D406 215 μ F $\pm$ 10% 900 VDC yyww-lot#-unit	SBE Company Identification Unique SBE Part Number Capacitance value and Tolerance DC Voltage Rating Serial Number (date code, lot number, unit number)

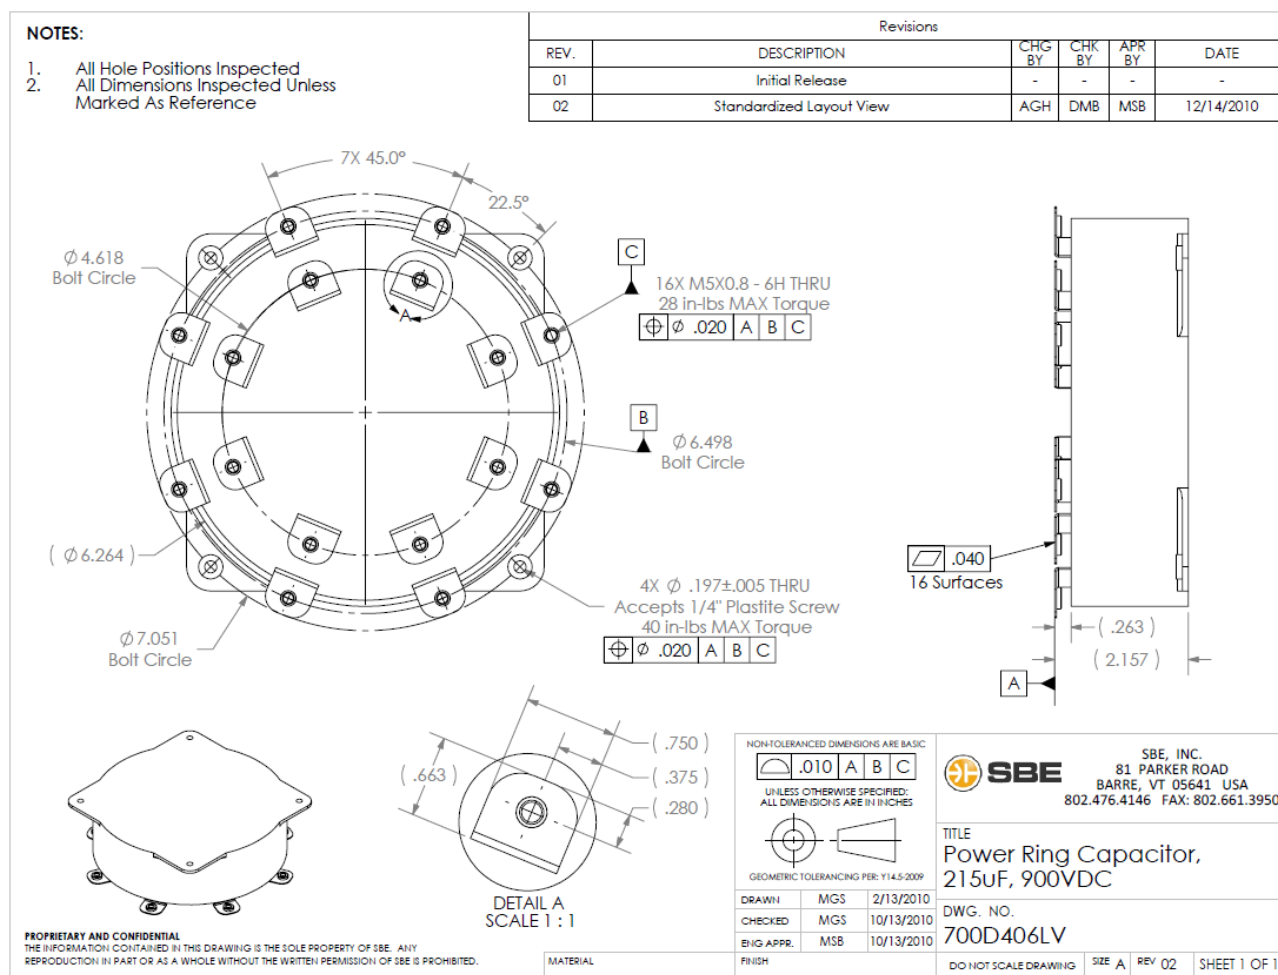

SBE Inc. Power Ring Division
 81 Parker Road • Barre, VT 05641 USA
 Tel: 802-476-4146 • Fax: 802-661-3950
 Email: PowerRing@SBElectronics.com
 Web: www.SBElectronics.com



ISO 9001
QMI-SAI Global

At the Leading Edge of Film Capacitor Technology™