

**Digital Attenuator, 31.5 dB, 6-Bit, TTL Driver
DC - 2.0 GHz**

**AT65-0107
V5**


Features

- Attenuation: 0.5 dB Steps to 31.5 dB
- Low DC Power Consumption
- Plastic SOIC, Wide Body, SMT Package
- Integral TTL Driver
- 50 ohm Impedance
- Test Boards are Available
- Tape and Reel Packaging Available

Description

MM/A-COM's AT65-0107 is a GaAs FET 6-bit digital attenuator with a 0.5 dB minimum step size and a 31.5 dB total attenuation range. This device is in a SOIC-24 wide body, plastic surface mount package. The AT65-0107 is ideally suited for use where accuracy, fast speed, very low power consumption and low costs are required.

SOW-24

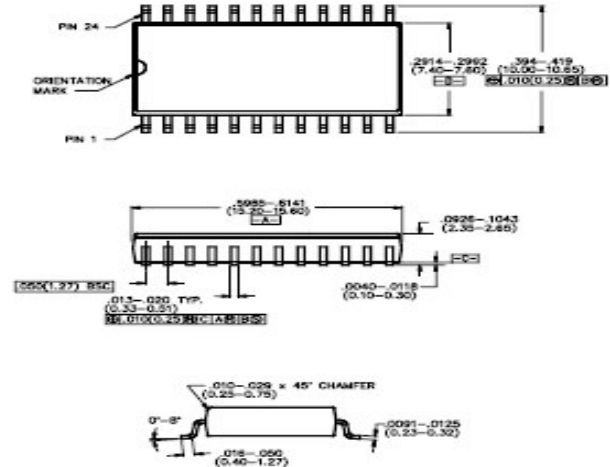

Package outline conforms to JEDEC standard MS-013AD.

Pin Configuration

Pin No.	Function	Pin No.	Function
1	GND	13	RF
2	GND	14	GND
3	GND	15	GND
4	C16	16	GND
5	C8	17	GND
6	-Vee	18	GND
7	+Vcc	19	GND
8	C4	20	GND
9	C2	21	GND
10	C2	22	GND
11	C0.5	23	GND
12	GND	24	RF

Ordering Information

Part Number	Package
AT65-0107	Bulk Packaging
AT65-0107TR	Tape and Reel (1K Reel)
AT65-0107-TB	Units Mounted on Test Board

Note: Reference Application Note M513 for reel size information.

Truth Table

C16	C8	C4	C2	C1	C0.5	Attenuation
0	0	0	0	0	0	Loss, Reference
0	0	0	0	0	1	0.5 dB
0	0	0	0	1	0	1.0 dB
0	0	0	1	0	0	2.0 dB
0	0	1	0	0	0	4.0 dB
0	1	0	0	0	0	8.0 dB
1	0	0	0	0	0	16.0 dB
1	1	1	1	1	1	31.5 dB

0 = TTL Low; 1 = TTL High

**Digital Attenuator, 31.5 dB, 6-Bit, TTL Driver
DC - 2.0 GHz**

**AT65-0107
V5**

Electrical Specifications: T_A = 25°C

Parameter	Test Conditions	Frequency	Units	Min.	Typ.	Max.
Insertion Loss	—	DC - 1.0 GHz	dB	—	3.1	3.6
		DC - 2.0 GHz	dB	—	3.6	4.2
Attenuation Accuracy	Any Bit or Combination of Bits	DC - 2.0 GHz	dB	—	—	±(.3 +4% of atten setting)
VSWR	Full Range	DC - 2.0 GHz	Ratio	—	1.8:1	2.1
Switching Speed ¹	50% Cntl to 90%/10% RF 10% to 90% or 90% to 10%	—	nS	—	75	150
		—	nS	—	20	50
1 dB Compression	— —	50 MHz	dBm	—	+21	—
		0.5 - 2.0 GHz	dBm	—	+29	—
Input IP3	Two-tone inputs up to +5 dBm	50 MHz	dB	—	+35	—
		0.5 - 2.0 GHz	dB	—	+48	—
V _{cc}	—	—	V	4.75	5.0	5.25
-V _{ee}	—	—	V	-8.0	-5.0	-4.75
Logic "0"	Sink Current is 20 µA max.	—	V	0.0	—	0.8
Logic "1"	Source Current is 20 µA max.	—	V	2.0	—	5.0
I _{cc}	V _{cc} min to max, Logic "0" or "1"	—	mA	—	0.2	6
-I _{ee}	-V _{ee} min to max, Logic "0" or "1"	—	mA	—	-0.2	-1

1. Decoupling capacitors (.01µF) are required on power supply lines.

Absolute Maximum Ratings ³

Parameter	Absolute Maximum
Max. Input Power	0.05 GHz
	0.5 - 2.0 GHz
Supply Voltages	V _{cc}
	V _{ee}
	V _{ee}
Logic Voltage ⁴	-0.5V to V _{cc} +0.5V
Control Voltage	-0.5V to V _{cc} +0.5V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +125°C

3. Exceeding any one or combination of these limits may cause permanent damage to this device.

4. Standard CMOS TTL interface, latch-up will occur if logic signal is applied prior to power supply.

Handling Procedures


Please observe the following precautions to avoid damage:

Static Sensitivity


GMIC Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.

Typical Performance Curves @ 25°C


VSWR @ Insertion Loss

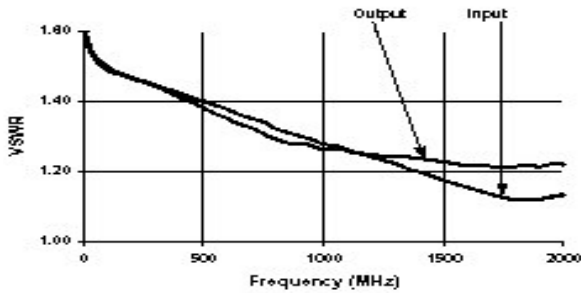


VSWR, 0.5 dB Bit

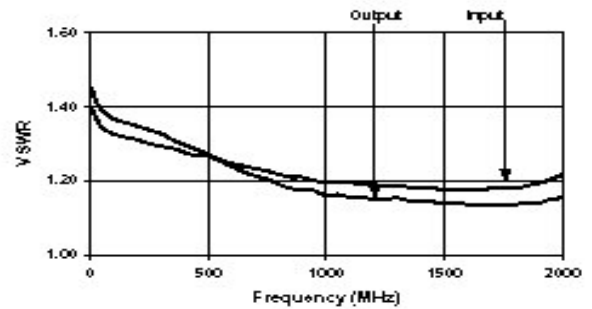


VSWR, 1 dB Bit

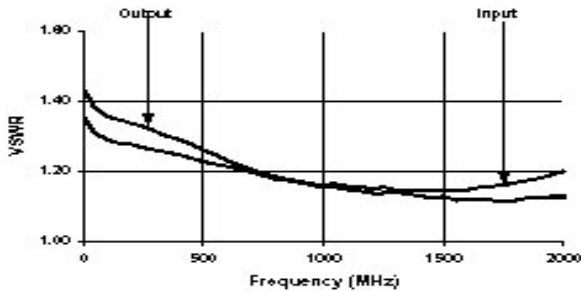


VSWR, 2 dB Bit

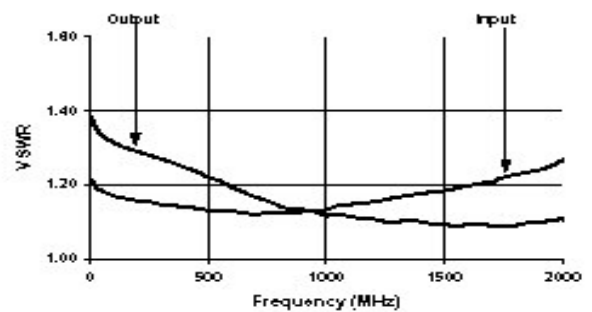


VSWR, 4 dB Bit

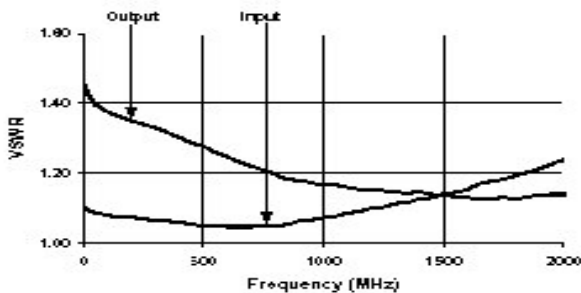


VSWR, 8 dB Bit

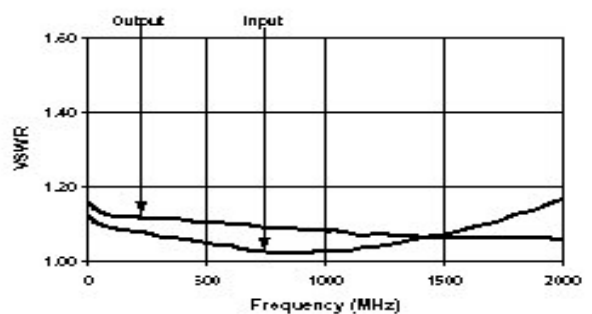

VSWR, 16 dB Bit

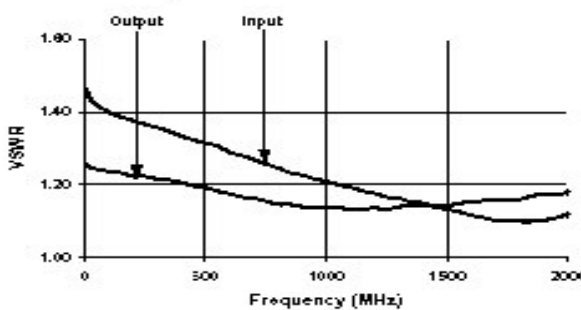


VSWR, Maximum Attenuation

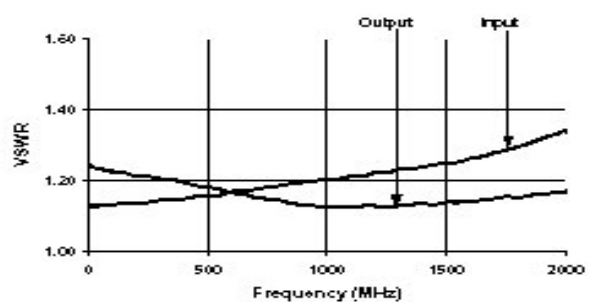


**Digital Attenuator, 31.5 dB, 6-Bit, TTL Driver
DC - 2.0 GHz**

**AT65-0107
V5**


Loss vs. Temperature

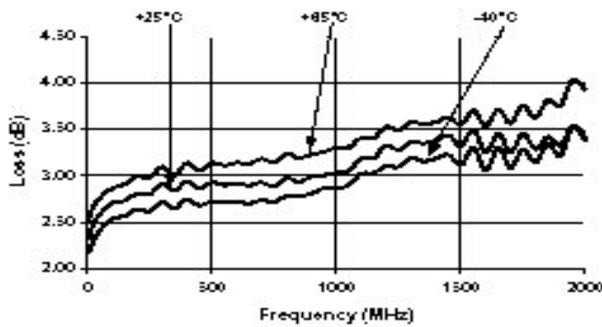


0.5 dB Bit vs. Temperature

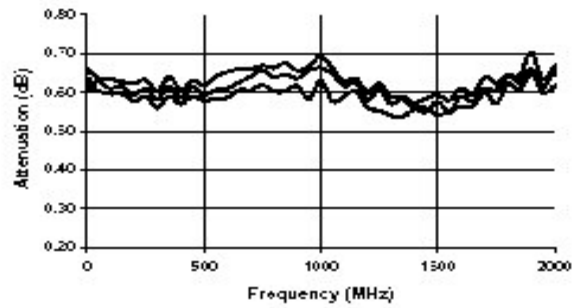


1 dB Bit vs. Temperature

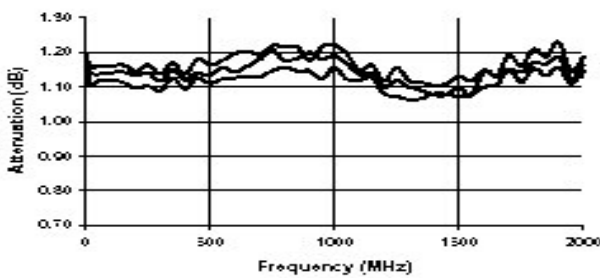


2 dB Bit vs. Temperature

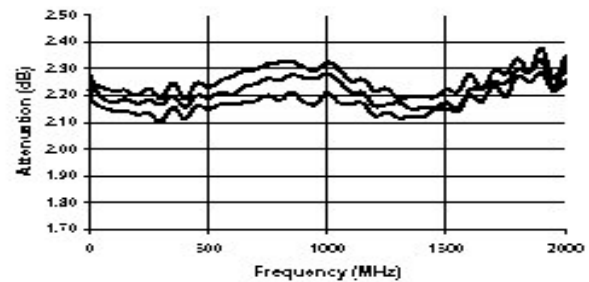


4 dB Bit vs. Temperature

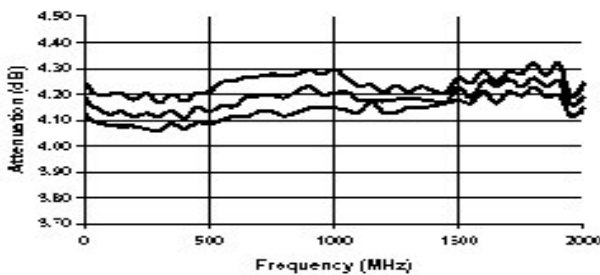

8 dB Bit vs. Temperature

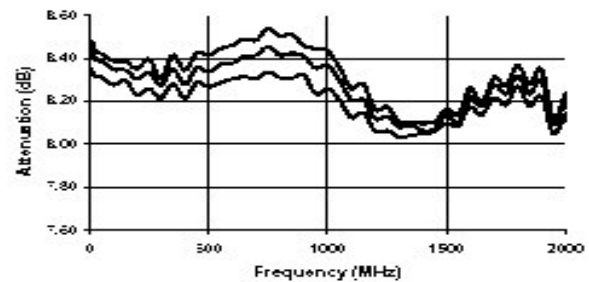

16 dB Bit vs. Temperature

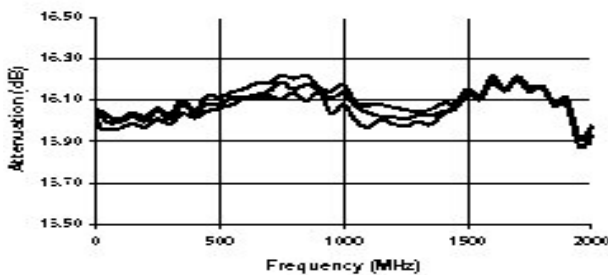

Max Attenuation vs. Temperature

