

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0014564093

Status:

Active

Overview:

cgrid_sl_products

Description:

2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Female, Single Row, Version D, Back Ribs, Wire Size 26, 0.76µm (30µ") Gold (Au), 9 Circuits

Documents:	
3D Model	Product Specification PS-70400 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	Ribbon Cable / Wire Trap Connectors
Series	70400
Comments	Terminals Preloaded
Component Type	Housing
Glow-Wire Compliant	No
Overview	cgrid_sl_products
Product Name	SL™


Physical

Circuits (Loaded)	9
Color - Resin	Black
Durability (mating cycles max)	50
Entry Angle	Vertical
Flammability	94V-0
Lock to Mating Part	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	30
Plating min: Mating (µm)	0.75
Plating min: Termination (µin)	75
Plating min: Termination (µm)	1.875
Polarized to Mating Part	Yes
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	1.35mm (.053") max.
Wire Size AWG	26
Wire/Cable Type	Discrete Wire, Ribbon Cable

Electrical

Current - Maximum per Contact	3A
Voltage - Maximum	250V

Material Info

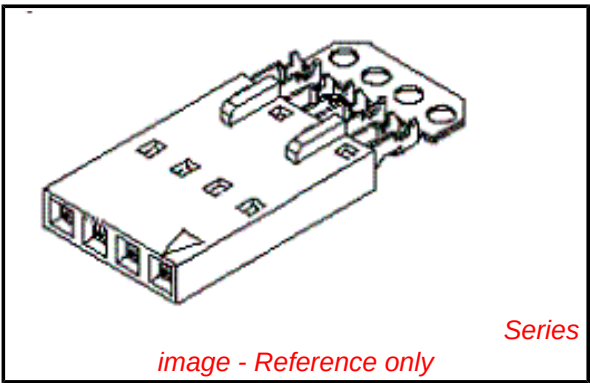

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

70400Series

Mates With

70004 Interim Clip (Single Row), 70013 Interim Clip (Dual Row)

Use With

7307 Tinned 28AWG, 7767 Topcoat 28AWG, 24241 Tinned 26AWG, 8996 Topcoat 26AWG, 24226 Tinned 24AWG, 8997 Topcoat 24AWG, 24369 High Flex 26AWG, 24389 High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hawk Semi-Automatice Discrete	0011201337

Old Part Number	70400-1303	Wire Terminator for SL - Rebuilt US*
Reference - Drawing Numbers		Hawk™ Ribbon <u>0623003000</u>
Product Specification	PS-70400	Cable Terminator for SL without Break-off
Sales Drawing	SDA-70400-1296-1319	Hawk™ Semi- <u>0623004900</u> Automatic Discrete
		Wire Terminator for SL - Rebuilt CE
		Approved*
		Hawk™ Flat Flex <u>0623005200</u>
		Cable Terminator for SL with Break-off
		Hawk™ Ribbon <u>0623005300</u>
		Cable Terminator with for SL Break-off
		IDT Discrete <u>0621000700</u>
		Handtool Module for SL™
		Hawk™ Semi- <u>0623003100</u> Automatic Discrete
		Wire Terminator for SL

This document was generated on 05/21/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

OPTION D


NOTES:

- 1) TO BE USED WITH (26) AWG. STRANDED WIRE WITH (1.35)/.053 DIA. MAX. INSULATION.
- 2) SEE CHART FOR CIRCUIT SIZES.
- 3) STANDARD PACKAGING PER PK-70400-0001. OPTIONAL PACKAGING MAY BE AVAILABLE, REQUEST DWG. PK-70400
- 4) PARTS STACKABLE END TO END ON (2.54)/.100 CENTERS.
- 5) REFER TO PRODUCT SPECIFICATION: PS-70400.
- 6) SEE DWG. SDA-70400-**** (SHT. 5) FOR OPTIONAL HOUSING DETAILS.
- 7) 4 CIRCUIT SHOWN. 3 - 25 CKT'S. HAVE (2) RIBS.
- 8) TO MATE WITH MOLEX PART NO'S.: 70004-****, 70013-****


9) 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS.



SECTION C-C



PRE-LOADED ASSEMBLY

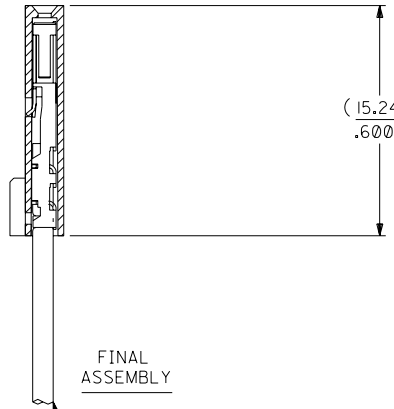

FINAL ASSEMBLY

HOUSING PART NO. 70066-****
MATERIAL: G.F. POLYESTER, 94V-0

TERMINAL PART NO. 70028-****
MATERIAL: PHOSPHOR BRONZE
PLATING PER ES-88-***

30 GOLD - .000030 MIN. GOLD IN SELECT AREA WITH .000075 MIN. TIN IN SELECT AREA OVER .000050 MIN. NICKEL OVER-ALL.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

I.D. SLOT CODE TO WIRE GAUGE CHART	
I.D. SLOT CODE	WIRE GAUGE
B	26 AWG.

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
30 GOLD	RED

CKT. SIZE	A	B	EDP. NO.	ENG. NO.
2	(2.54) .100	(5.05) .199	14-56-4023	A-70400-1296
3	(5.08) .200	(7.59) .299	14-56-4033	A-70400-1297
4	(7.62) .300	(10.13) .399	14-56-4043	A-70400-1298
5	(10.16) .400	(12.67) .499	14-56-4053	A-70400-1299
6	(12.70) .500	(15.21) .599	14-56-4063	A-70400-1300
7	(15.24) .600	(17.75) .699	14-56-4073	A-70400-1301
8	(17.78) .700	(20.29) .799	14-56-4083	A-70400-1302
9	(20.32) .800	(22.83) .899	14-56-4093	A-70400-1303
10	(22.86) .900	(25.37) .999	14-56-4103	A-70400-1304
11	(25.54) 1.000	(27.91) 1.099	14-56-4113	A-70400-1305
12	(27.94) 1.100	(30.45) 1.199	14-56-4123	A-70400-1306
13	(30.48) 1.200	(32.99) 1.299	14-56-4133	A-70400-1307
14	(33.02) 1.300	(35.53) 1.399	14-56-4143	A-70400-1308
15	(35.56) 1.400	(38.07) 1.499	14-56-4153	A-70400-1309
16	(38.01) 1.500	(40.61) 1.599	14-56-4163	A-70400-1310
17	(40.64) 1.600	(43.15) 1.699	14-56-4173	A-70400-1311
18	(43.18) 1.700	(45.69) 1.799	14-56-4183	A-70400-1312
19	(45.72) 1.800	(48.23) 1.899	14-56-4193	A-70400-1313
20	(48.26) 1.900	(50.77) 1.999	14-56-4203	A-70400-1314
21	(50.80) 2.000	(53.31) 2.099	14-56-4213	A-70400-1315
22	(53.34) 2.100	(55.85) 2.199	14-56-4223	A-70400-1316
23	(55.88) 2.200	(58.39) 2.299	14-56-4233	A-70400-1317
24	(58.42) 2.300	(60.93) 2.399	14-56-4243	A-70400-1318
25	(60.96) 2.400	(63.47) 2.499	14-56-4253	A-70400-1319

70400

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
30 GOLD	RED

D		REVISED PER ECR NO. U82110 10-17-88 AAB	DIMENSIONS SHOWN (METRIC) INCH		UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		REVISIONS		MFG. SH. REV.	
E	LEAD FREE UCP2004-1769 RWHITE 04/03/17	C	REVISE PER ECR #U80110 2/3/88 MJM	INCH	METRIC	3 PLACE ± .010 ---	2 PLACE ± .014 ± 0.25	1 PLACE --- ± 0.35	FILE NAME	DATE
DI	ADD CARRIER CHAMF ECN #UDT1998-0280 05/20/98 LMCGRATH	B	REDRAWN ON CAD ECR# 8842 5/8/86 W.Z.	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE	4 : 1	WAZ	WAZ	SEE CHART	10 / 11/84
LTR.	REVISIONS	LTR.	REVISIONS	DRWG. BY	CHK'D. BY	SCALE	WAZ	WAZ	FILE NAME	DATE
				APP'D. BY	SCALE	4 : 1			SDA-70400-1296-1319	10 / 11/84

ASSEMBLY, SL CONNECTOR (SINGLE ROW- (2.54)/.100 GRID)		MOLEX INCORPORATED		SHEET NO.		DATE	
LITSE,ILL.		60532		U.S.A.		10 / 11/84	
PART NO.		DRWG. NO.		DIV.		SIZE	
SEE CHART		SDA-70400-1296-1319		DA		C	