

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0014445323](#)
Status: **Active**
Overview: [cgrid_sl_products](#)
Description: 2.54mm (.100") Pitch SL™ Insulation Displacement Connector Assembly, Male, Single Row, Version D, Back Ribs, for Wire Size 22, 0.38µm (15µ") Gold (Au), 23 Circuits

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)

[Product Specification PS-70400 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family Ribbon Cable / Wire Trap Connectors
Series [70475](#)
Comments Terminals Preloaded
Component Type Housing
Glow-Wire Compliant No
Overview [cgrid_sl_products](#)
Product Name SL™

Physical

Circuits (Loaded) 23
Durability (mating cycles max) 50
Entry Angle Vertical
Flammability 94V-0
Lock to Mating Part None
Number of Rows 1
PCB Retention None
Packaging Type Tube
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Polarized to Mating Part No
Stackable Yes
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -40°C to +105°C
Wire Insulation Diameter 1.35mm (.053") max.
Wire Size AWG 22
Wire/Cable Type Discrete Wire, Ribbon Cable

Electrical


Current - Maximum per Contact 3A
Voltage - Maximum 250V

Material Info

Old Part Number 70475-2367

Reference - Drawing Numbers

Product Specification PS-70400

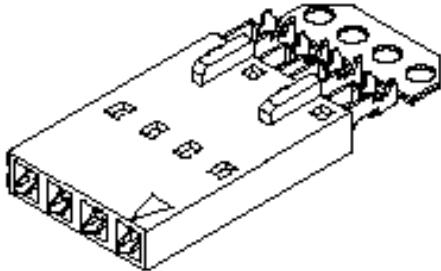

Series

image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[70475Series](#)



Mates With
[70004](#) Interim Clip (Single Row), [70013](#) Interim Clip (Dual Row)

Use With
[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG


OPTION D

NOTES:


- 1) TO BE USED WITH (22) AWG. STRANDED WIRE WITH (1.35)/.053 DIA. MAX. INSULATION.
- 2) SEE CHART FOR CIRCUIT SIZES.
- 3) STANDARD PACKAGING PER PK-70873-0001. OPTIONAL PACKAGING MAY BE AVAILABLE, REQUEST DWG. PK-70475.
- 4) PARTS STACKABLE END TO END ON (2.54)/.100 CENTERS.
- 5) REFER TO PRODUCT SPECIFICATION: PS-70475.
- 6) SEE DWG. SDA-70475-**** (SHT.3) FOR OPTIONAL HOUSING DETAILS.
- 7) 4 CIRCUIT SHOWN. 3 - 25 CKT'S. HAVE (2) RIBS.
- 8) TO MATE WITH MOLEX PART NO'S.: 70018-****, 70022-****, 70104-****.
- 9) 2 CIRCUIT ASSEMBLIES SUPPLIED AS GROUPED PAIRS.

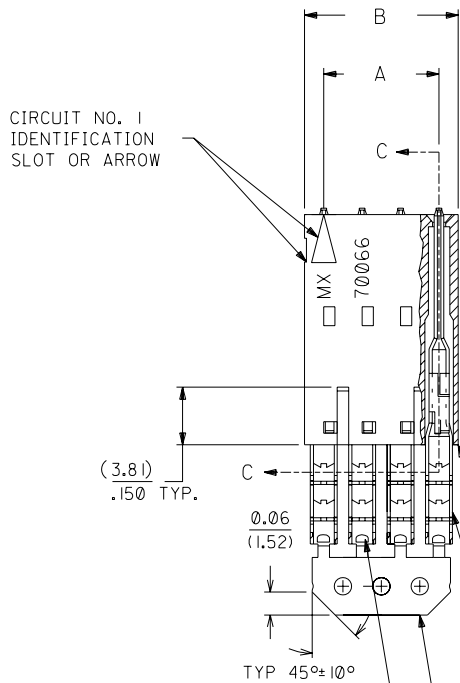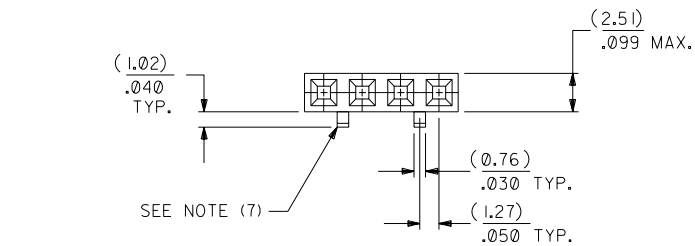

SECTION C-C



PRE-LOADED
ASSEMBLY

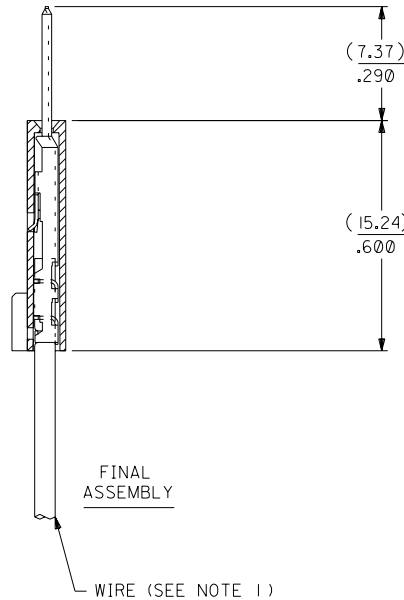

FINAL
ASSEMBLY

WIRE (SEE NOTE 1)

HOUSING PART NO. 70066-****
MATERIAL: G.F. POLYESTER, 94V-0

TERMINAL PART NO. 70110-****
MATERIAL: PHOSPHOR BRONZE
PLATING PER ES-88-***

15 GOLD - .000015 MINIMUM GOLD IN SELECT AREA WITH
.000075 MINIMUM TIN
IN SELECT AREA OVER .000050 MINIMUM NICKEL
OVER-ALL.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

I.D. SLOT CODE TO WIRE GAUGE CHART	
I.D. SLOT CODE	WIRE GAUGE
D	22 AWG.

PLATING CODE (STRIPE ON CARRIER STRIP)	
PLATING	COLOR
15 GOLD	YELLOW

		C		REVISED PER ECR NO. U82124 10-17-88 MGB		DIMENSIONS SHOWN (METRIC) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		▽ = ▽ = REVISE ONLY ON CAD SYSTEM													
D		B		LEAD FREE UCP2004-1769 RWHITE 04/03/24		REVISE PER ECR #U81370 5/20/88 MJM		TITLE ASSEMBLY, SL CONNECTOR (SINGLE ROW- (2,54)/.100 GRID)													
C I		A		RELEASE FOR PROD. PER ECR NO. 25618 11-30-87 AAB		<table><tr><td></td><td>INCH</td><td>METRIC</td></tr><tr><td>3 PLACE</td><td>± .010</td><td>---</td></tr><tr><td>2 PLACE</td><td>± .014</td><td>± 0.25</td></tr><tr><td>1 PLACE</td><td>---</td><td>± 0.35</td></tr></table>			INCH	METRIC	3 PLACE	± .010	---	2 PLACE	± .014	± 0.25	1 PLACE	---	± 0.35	MOLEX INCORPORATED LISELLE, ILL. 60532 U.S.A.	
	INCH	METRIC																			
3 PLACE	± .010	---																			
2 PLACE	± .014	± 0.25																			
1 PLACE	---	± 0.35																			
						DRAWING: AAB APPROVED BY: WAZ		SHEET NO. 1 DATE 11/30/87													
L.T.R.		REVISIONS		L.T.R.		REVISIONS		PART NO. SEE CHART SDA-70475-2346-2369													
								FILE NAME 74752346 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.													
								DIV. C													