


Data sheet | Item number: 706-150/326-100

Connection cable; 26-pole; Pluggable connector per DIN 41651; 26-pole;
Pluggable connector per DIN 41651; Length: 1 m; Conductor cross-section:
0.14 mm²

www.wago.com/706-150/326-100

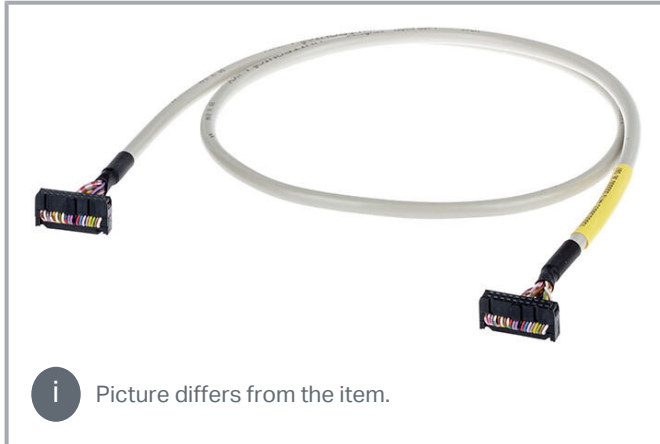

Picture differs from the item.

Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A.
------	---

Electrical data

Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	1 A

Connection data

Pole No.	26
Connection type (1)	System
Pole number 1	26
Pluggable connectors	Pluggable connector per DIN 41651; Female connector
Connection type 2	System
Pole number 2	26
Connector 2	Pluggable connector per DIN 41651; Female connector
Cable type	LiYY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Physical data

Cable length	1 m
--------------	-----

Material data

Weight	135 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143976732
Customs tariff number	85444290900

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-150/326-100	URL	Download
Connection cable; 26-pole; Pluggable connector per DIN 41651; 26-pole; Pluggable connector per DIN 41651; Length: 1 m; Conductor cross-section: 0.14 mm²		

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.