


## Data sheet | Item number: 706-5030/201-200

System cable; for Gefanuc 9030; 8 digital outputs; Length: 2 m; Conductor cross-section: 0.14 mm<sup>2</sup>

[www.wago.com/706-5030/201-200](http://www.wago.com/706-5030/201-200)

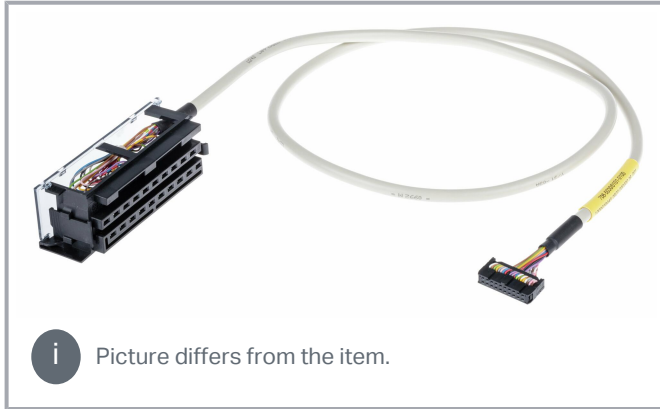

### Data Notes

|      |                                                                                       |
|------|---------------------------------------------------------------------------------------|
| Note | When using more than 10 wires, the maximum current per wire must be reduced to 0.7 A. |
|------|---------------------------------------------------------------------------------------|

### Electrical data

|                         |                   |
|-------------------------|-------------------|
| Inputs/outputs          | 8 digital outputs |
| Operating voltage       | ≤ AC/DC 35 V      |
| Current per wire (max.) | 1 A               |

### Connection data

|                               |                                                     |
|-------------------------------|-----------------------------------------------------|
| Compatible PLC Modules        | GE Fanuc 9030                                       |
| Compatible PLC I/O Card Types | IC693 MDL730                                        |
| Connection type (1)           | System                                              |
| Pole number 1                 | 10                                                  |
| Pluggable connectors          | Pluggable connector per DIN 41651; Female connector |
| Connection type 2             | System                                              |
| Pole number 2                 | 20                                                  |
| Connector 2                   | GeFanuc IC 693 ACC 311                              |
| Cable type                    | LiYY                                                |
| Wire cross-section            | 0.14 mm <sup>2</sup>                                |

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Color code

per DIN VDE 47100

**Physical data**

Cable length

2 m

**Material data**

Weight

1.1 g

**Environmental requirements**

Surrounding air temperature (operation)

-20 ... 50 °C

**Commercial data**

PU (SPU)

1 Stück

Packaging type

box

GTIN

4055143044943

**Downloads****Documentation****System Description**

WAGO System Wiring, Selection Guide

This guide will help you select the appropriate interface modules and system cables for the controller you are using.

pdf

545.9 kB

[Download](#)**Environmental Product Compliance****Compliance Search**

Environmental Product Compliance 706-5030/201-200

URL

[Download](#)

System cable; for Gefanuc 9030; 8 digital outputs; Length: 2 m; Conductor cross-section: 0.14 mm<sup>2</sup>

**Installation Notes**

Subject to changes. Please also observe the further product documentation!

WAGO GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.