Inverse DIN 41612 Header

Two Row Type Q (Rows A & B Filled) 7064 Series



92

- High density (64 position)
- Accepts 3435-1 keying plug system

Date Modified: February 19, 1999

Physical

Insulation	
Material:	Glass Filled Polyester (PBT)
Flammability:	UL 94V-0
Color:	Gray
Contact	
Material:	Brass
Plating	
Underplate:	79 μ″ (2.00 μm) Nickel — QQ-N-290, Class 2
Wiping Area:	15 μ″ (0.38 μm) Gold — MIL-G-45204, Type II, Grade C
Solder Tails:	200 μ″ (5.08 μm) 60/40 Tin Lead — MIL-P-81728

Electrical

Current Rating:	3 A
Insulation Resistance:	$> 1 \times 10^{12}$ Ω at 1000 Vdc
Withstanding Voltage:	1000 Vrms at Sea Level
Contact Resistance:	< 15 Milliohms

Environmental


Temperature Rating:	–55°C to +125°C


UL File No.: E68080


3M Interconnect Solutions Division
6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

Inverse DIN 41612 Header
Two Row Type Q (Rows A & B Filled) 7064 Series

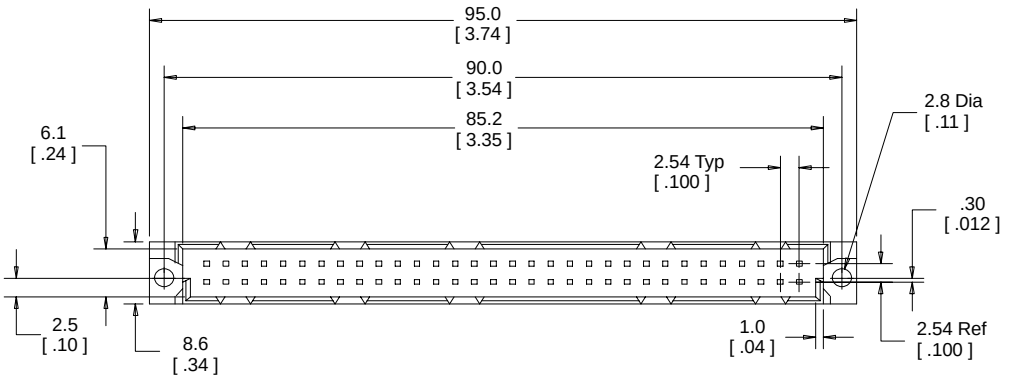

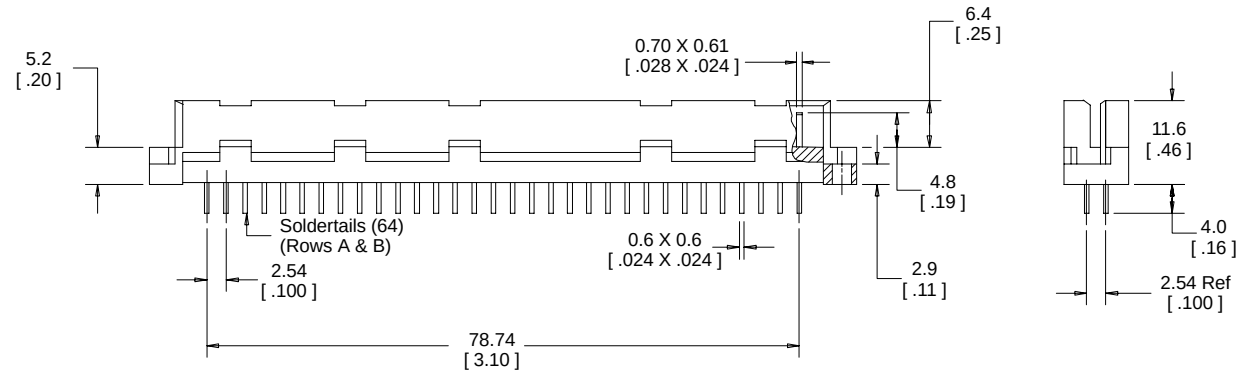

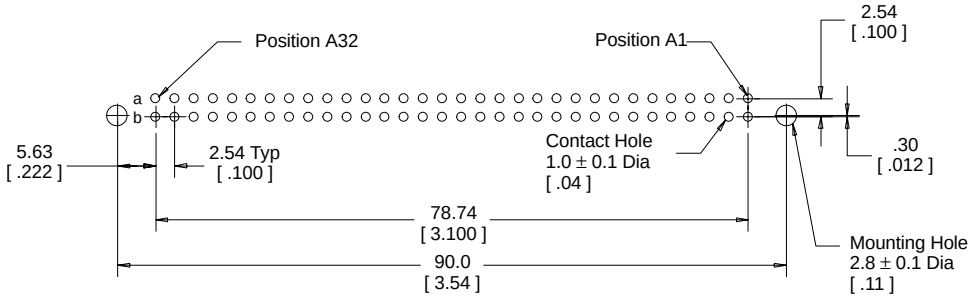

Recommended Hole Pattern
(Shown for Mounting Side of Board)

mm
[Inch]

Tolerance Unless Noted			
	.0	.00	.000
mm	± .3	± .13	

[ ] Dimensions for Reference only

Ordering Information

Inverse Din 41612
Straight Header
7064-60B3TH

TS-0428-06
Sheet 2 of 2

3M Interconnect Solutions Division
6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373