PRELIMINARY

High Drive Fundamental Quartz Crystal Oscillator

■GENERAL DESCRIPTION

The NJU6360 series is a C-MOS fundamental quartz crystal oscillator that consists of an oscillation amplifier, 3-stage divider and 3-state output buffer.

The 5-stage divider generates only one frequency selected of f_0,$f_0/2$,$f_0/4$ $f_0/8$, $f_0/16$ and $f_0/32$ by internal circuits is output.

The oscillation amplifier is realized very low stand-by current using NAND circuit.

The 3-state output buffer is C-MOS compatible and can drive 50pF(@5V) C-MOS load.

■PACKAGE OUTLINE

NJU6360XC-D

■FEATURES

- ●Operating Voltage 2.7 to 5.5V
- ●Maximum Oscillation Frequency 50MHz
- ●Low Operating Current
- ●High Fan-out I_{OH}/I_{OL}=8mA@3.3V
  I_{OH}/I_{OL}=16mA@5.0V
- ●5-Stage Divider Maximum Divider $f_0/32$
- ●Oscillation Stop and Output Stand-by Function
- ●3-State Output Buffer
- ●Oscillation Capacitors Cg and Cg on-chip
- ●Package Outline Thin-Chip
- ●C-MOS Technology

■PAD LOCATION

Thin-Chip



■LINE-UP TABLE

Type No.		F_{OUT}	Internal Connect	Cg/Cd
NJU6360	A	f_0	Connected A Line	15/15pF
	B	$f_0/2$	Connected B Line	15/15pF
	C	$f_0/4$	Connected C Line	15/15pF
	D	$f_0/8$	Connected D Line	15/15pF
	E	$f_0/16$	Connected E Line	15/15pF
	F	$f_0/32$	Connected F Line	15/15pF

■COORDINATES

No	Pad Name	X	Y
1	$\overline{CONT}$	-178	231
2	XT	-178	77
3	$\overline{XT}$	-178	-77
4	V_{SS}	-178	-231
5	F_{OUT}	206	-231
6	V_{DD}	206	231

Starting Point:Chip Center Unit[um]
Chip Size:0.7x0.75mm
Thin-Chip Thickness(-D):200±20um
Pad Size:90x90um

■BLOCK DIAGRAM

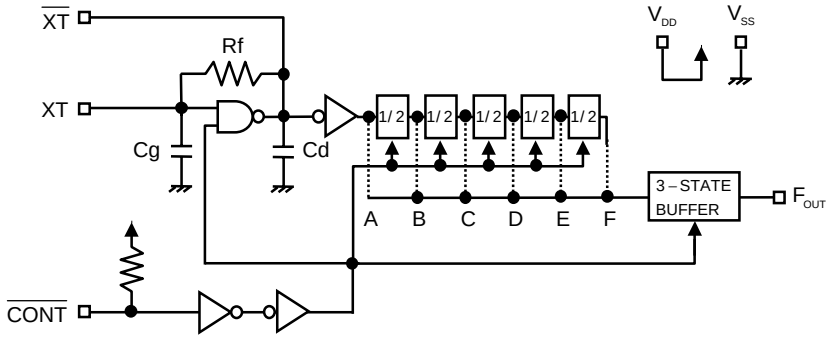

■TERMINAL DESCRIPTION

SYMBOL	FUNCTION
$\overline{CONT}$	Oscillation and 3-state Output Buffer Control $\overline{CONT}$ / F_{OUT} H or OPEN: Output either one frequency selected of f_0, $f_0/2$,$f_0/4$,$f_0/8$, $f_0/16$ and $f_0/32$ Note1) L: Oscillation Stop and High impedance Output
XT $\overline{XT}$	Quartz Crystal Connecting Terminals
V_{SS}	V_{SS}=0V
F_{OUT}	Frequency Output
V_{DD}	V_{DD}=2.5/3.0V/5.0V

Note1) Refer to the line-up table.

■ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{DD}	-0.5 to +7.0	V
Input Voltage	V_{IN}	V_{SS}-0.5 to V_{DD}+0.5	V
Output Voltage	V_O	-0.5 to V_{DD}+0.5	V
Input Current	I_{IN}	±10	MA
Output Current	I_O	±25	MA
Operating Temperature Range	Topr	-40 to +85	°C
Storage Temperature Range	Tstg	-55 to +125	°C

Note2) If the supply voltage(V_{DD}) is less than 7.0V, the input voltage must not over the V_{DD} level though 7.0V is limit specified.

Note3) Decupling capacitor should be connected between V_{DD} and V_{SS} due to the stabilized operation for the circuit.

■ELECTRICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Voltage	V_{DD}		2.7		5.5	V

(V_{DD}=3.3V,Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I_{DD}	A version,fosc=16MHz,C_L=30pF			8	mA
		B version,fosc=16MHz,C_L=30pF			6	
		C version,fosc=16MHz,C_L=30pF			4	
		D version,fosc=16MHz,C_L=30pF			3	
		E version,fosc=16MHz,C_L=30pF			3	
		F version,fosc=16MHz,C_L=30pF			3	
Oscillation Stopping Current	I_{STB}	$\overline{CONT}$ =V_{SS}, No load		2	5	uA
Stand-by Current	Ist	$\overline{CONT}$ =XT=V_{SS}, No load Note4)			1	uA
Input Voltage	V_{IH}		2.31		3.3	V
	V_{IL}		0		0.99	V
Output Current	I_{OH}	V_{OH}=2.97V	8			mA
	I_{OL}	V_{OL}=0.33V	8			mA
Input Current	I_{IN}	$\overline{CONT}$ =0.8V_{DD}		10.0	15.0	uA
		$\overline{CONT}$ =0.2V_{DD}		1.8	3.0	uA
3-state Off Leakage Current	I_{OZ}	$\overline{CONT}$ =V_{SS}, F_{OUT}= V_{DD} or V_{SS}			±0.1	uA
Feedback Resistance	Rf			255		KΩ
Internal Capacitor	Cg/Cd	fosc=16MHz, A/B/C/D/E/F version		15/15		pF
Maximum Oscillation Frequency	F_{MAX}		50			MHz
Output Signal Symmetry	SYM	C_L=15pF, @V_{DD}/2	45	50	55	%
		C_L=30pF, @V_{DD}/2	45	50	55	
Output Signal Rise Time	tr	C_L=15pF,10% to 90%		3	6	ns
		C_L=30pF,10% to 90%		4	8	
Output Signal Fall Time	tf	C_L=15pF,90% to 10%		3	6	ns
		C_L=30pF,90% to 10%		4	8	
Output Disable time	T_{PLZ}	C_L=15pF,R_{UP}=10kΩ			150	Ns
Output Enable Time	T_{PZL}	C_L=15pF,R_{UP}=10kΩ			150	Ns

Note4) Excluding input current on $\overline{CONT}$ Terminal.

(V_{DD}=5.0V,Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I_{DD}	A version,fosc=16MHz,C_L=50pF			15	mA
		B version,fosc=16MHz,C_L=50pF			11	
		C version,fosc=16MHz,C_L=50pF			9	
		D version,fosc=16MHz,C_L=50pF			7	
		E version,fosc=16MHz,C_L=50pF			7	
		F version,fosc=16MHz,C_L=50pF			7	
Oscillation Stopping Current	I_{STB}	$\overline{CONT}$ =V_{SS}, No load		5	10	UA
Stand-by Current	Ist	$\overline{CONT}$ =XT=V_{SS}, No load Note4)			1	UA
Input Voltage	V_{IH}		3.5		5.0	V
	V_{IL}	V_{OH}=4.5V	0		1.5	V
Output Current	I_{OH}	V_{OL}=0.5V	12			mA
	I_{OL}	$\overline{CONT}$ =0.8V_{DD}	12			mA
Input Current	I_{IN}	$\overline{CONT}$ =0.2V_{DD}		27.0	40.0	UA
		$\overline{CONT}$ =V_{SS}, F_{OUT}= V_{DD} or V_{SS}		5.5	8.0	uA
3-state Off Leakage Current	I_{OZ}				±0.1	uA
Feedback Resistance	Rf			255		KΩ
Internal Capacitor	Cg/Cd	fosc=16MHz, A/B/C/D/E/F version		15/15		pF
Maximum Oscillation Frequency	F_{MAX}		50			MHz
Output Signal Symmetry	SYM	C_L=15pF, @V_{DD}/2	45	50	55	%
		C_L=50pF, @V_{DD}/2	45	50	55	
Output Signal Rise Time	tr	C_L=15pF,10% to 90%		3	6	ns
		C_L=50pF,10% to 90%		4	8	
Output Signal Fall Time	tf	C_L=15pF,90% to 10%		3	6	ns
		C_L=50pF,90% to 10%		4	8	
Output Disable time	T_{PLZ}	C_L=15pF,R_{UP}=10kΩ			100	ns
Output Enable Time	T_{PZL}	C_L=15pF,R_{UP}=10kΩ			100	ns

Note4) Excluding input current on $\overline{CONT}$ Terminal.

■MEASURMENT CIRCUITS

(1)Output Signal Symmetry(C_L=15/30/50pF)

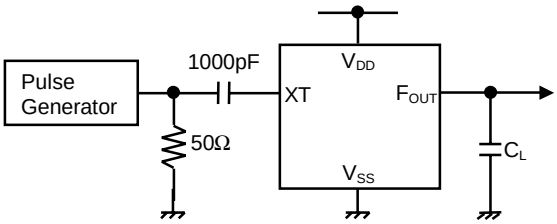

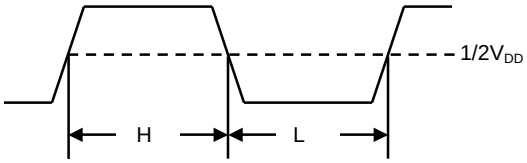

(2)Output Signal Rise/Fall Time(C_L=15/30/50pF)

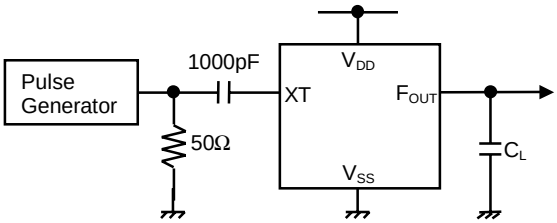

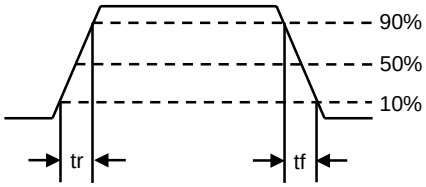

(3)Output Disable/Enable Time(C_L=15pF,R_{UP}=10kΩ)

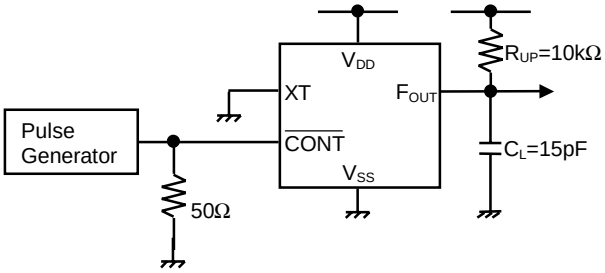

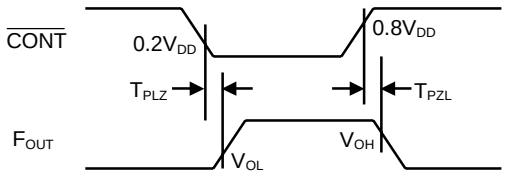

[CAUTION]
The specifications on this data book are only given for information , without any guarantee as regards either mistakes or omissions.
The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.