

JMK Inc.


716/718 SERIES


The 0716 & 0718 series filters provide excellent general filtering for Wye or Delta power configurations.
This series employs both differential mode and common mode insertion loss.

Operating Voltage= 250/480 Vac
OperatingCurrentMax= 20,30 amp
Operating Frequency= 50-60Hz
Temperature Range= -20 to 50 deg. C
DieWithstand(Line to Case)= 1500V~ for 1 Min
DieWithstand (Line to Line)= 1500Vdc for 1 min
Leakage Current = 2.5 mA @ 250 VAC,560Hz
Discharge after 5.0 sec.= 34V Max
Agency Approvals = UL

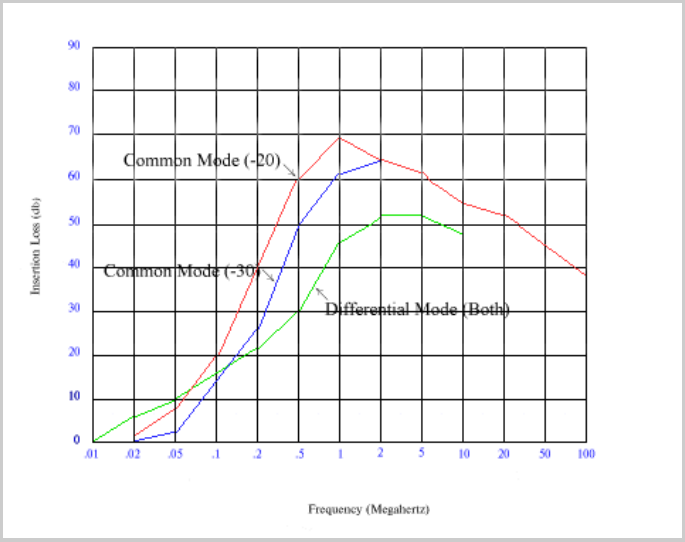

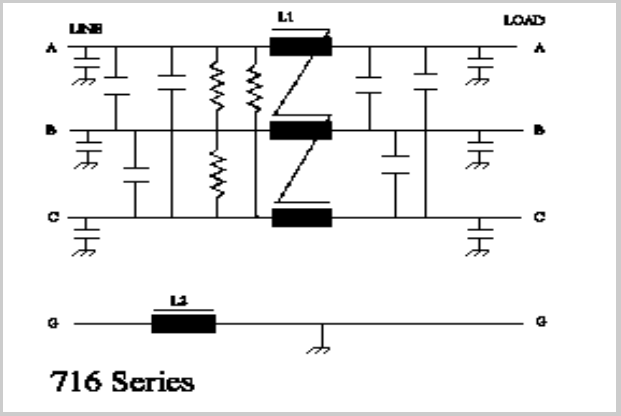

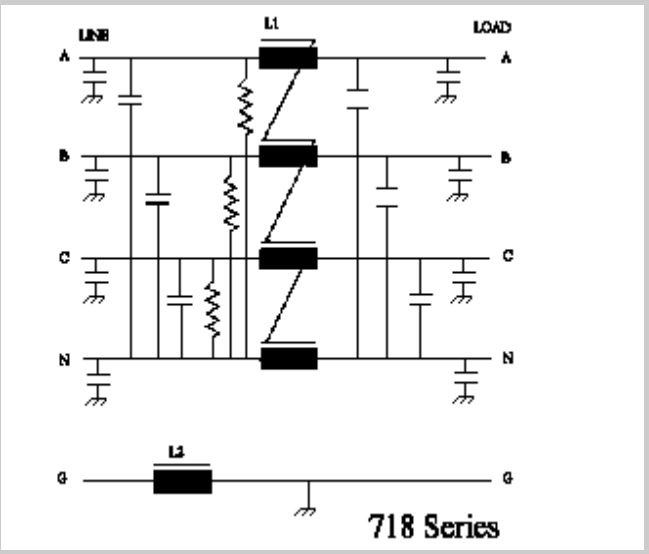

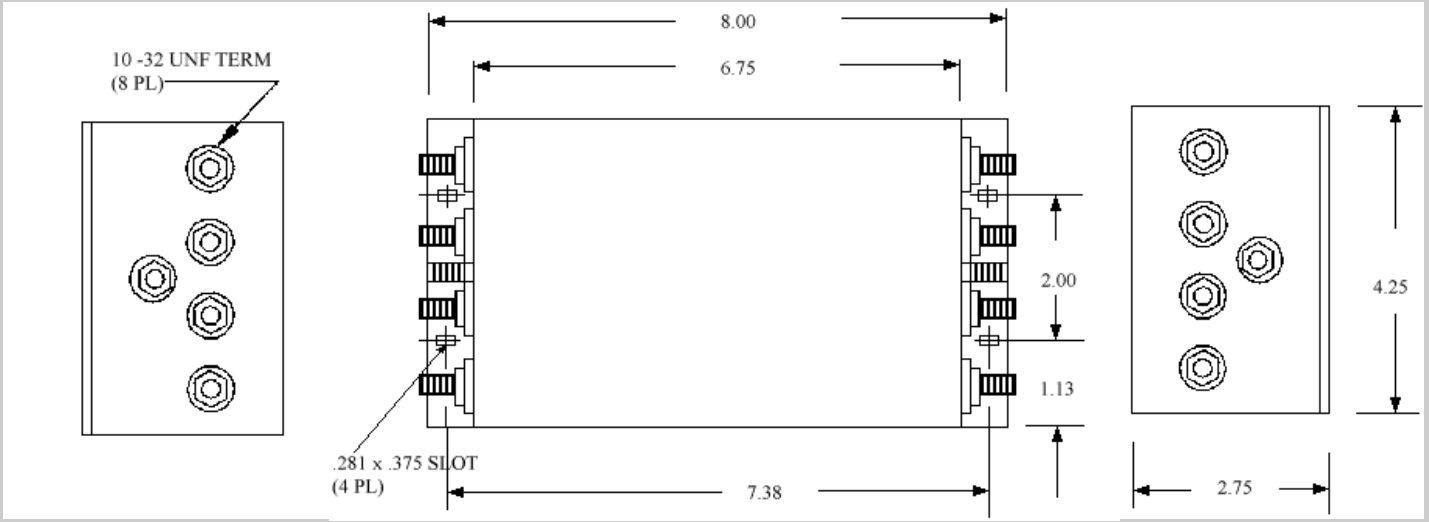

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
email: info@jmkfilters.com
EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141 589 1884