




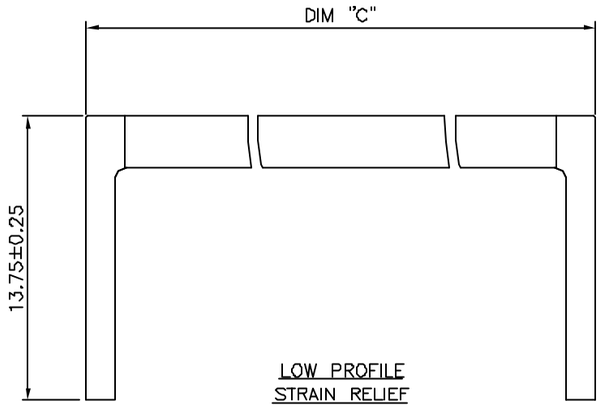


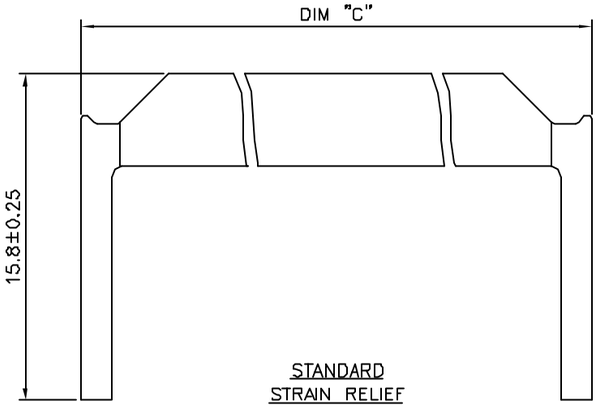

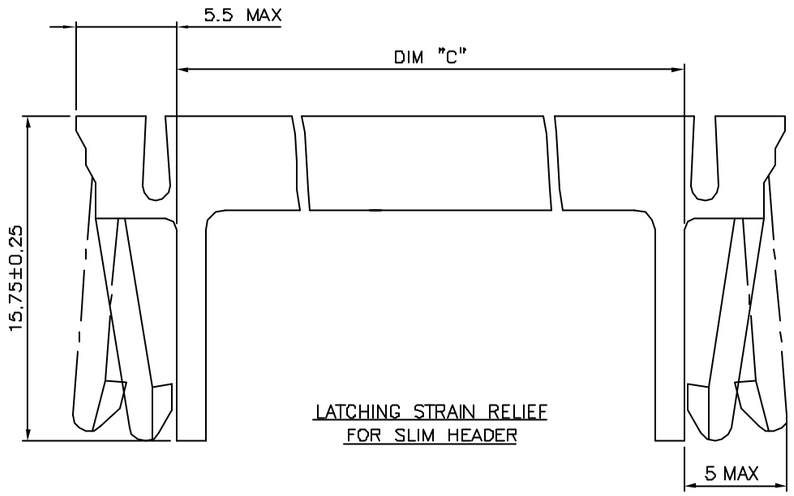

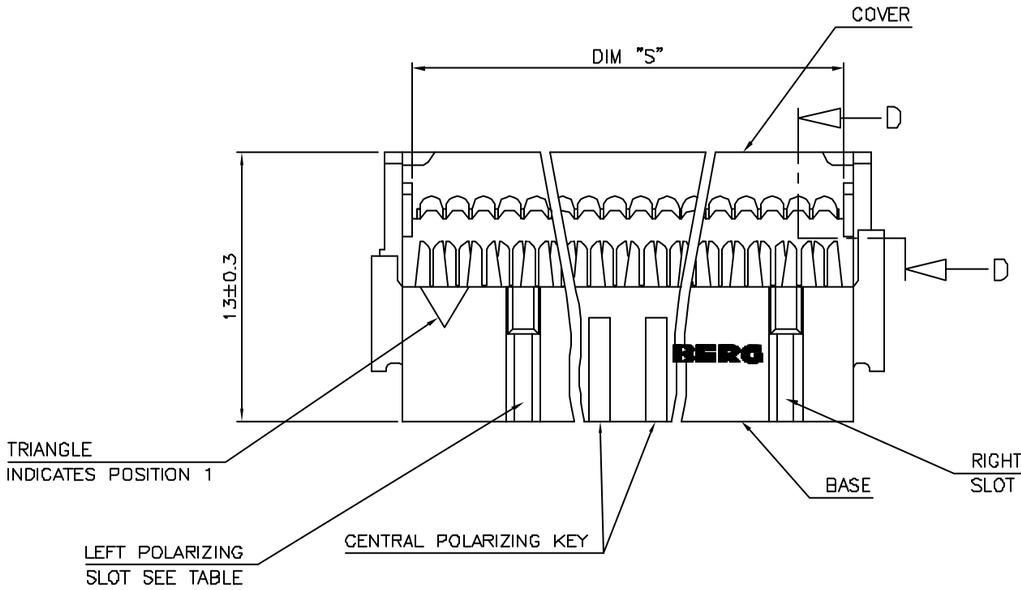







PRODUCT NUMBER

71602-YXXLF

- LEAD FREE, SEE NOTE 5
- TOTAL NB OF POSITION 04 TO 64 SEE SHEET 2
- OPTIONAL STRAIN RELIEF SEE SHEET 2

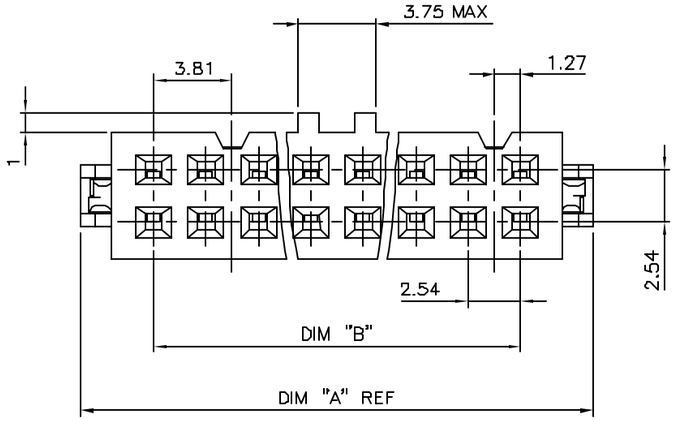

COVER ORIENTATION

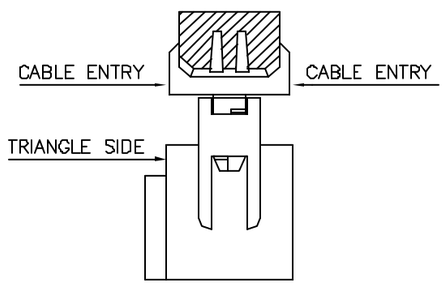

D D SECTION

NOTES:

1 MATERIAL: BASE AND COVER: 30% GLASS FILLED
POLYESTER FLAME RETARDANT PER UL-94-VO
COLOUR GREY
STRAIN RELIEF: UNREINFORCED THERMOPLASTIC
FLAME RETARDANT PER UL-94-VO
COLOUR GREY
CONTACT: PHOSPHOR BRONZE

2 PLATING: – CONTACT AREA 0.76µm GOLD
– REMAINDER 1.27µm Ni

3 TRIANGLE NOT MOLDED-IN ON 2x2 AND 2x3 POSITIONS WITH CENTRAL KEY

4 PRODUCT PACKAGED IN TUBES.

5 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS-22-008.
PACKAGING SPECIFICATION AS PER GS-14-920.

ltr	ecn no	dr	date
AB	F06-0274	LMU	06.08.25
V	V11892	DLE	01.08.10
W	F10566	DLE	01.10.24
X	F03019	DLE	03.01.23
Y	F03099	DLE	03.04.24
AA	F06-0270	LMU	06.09.12

sheet	revision	AB Y
index	sheet	1 2


mat'l code: SEE NOTES
surface: ISO 1302
tolerance: ISO 406 ISO 1101
tolerances unless otherwise specified: angles, linear
projection
mm
scale 5:1
product family: QKIE FEM
title: QUICKIE III FEM 0.76µm Au
dwg no 71602
sheet 1 of 2
size A2
type CUSTOMER Drawing

dr	P. NIZZI	96.02.09
engr	JM PHAMVAN	96.02.09
chr	P. NIZZI	96.02.09
appd	JMP	96.02.09


Copyright FCI
FCIconnect.com
form: A2

PDM: Rev:AB STATUS:Released Printed: Nov 11, 2011


PRODUCT NUMBER	SIZE	DIM "A"	DIM "B"	DIM "C"	DIM "S"	SLOT STYLE
71602-X04LF	2x 2	9.54	2.54	9.46	5.66	NO SLOT
71602-X06LF	2x 3	12.08	5.08	12.00	8.20	RIGHT IF NO KEY
71602-X08LF	2x 4	14.62	7.62	14.54	10.74	RIGHT IF NO KEY
71602-X10LF	2x 5	17.16	10.16	17.08	13.28	RIGHT SLOT
71602-X12LF	2x 6	19.70	12.70	19.62	15.82	RIGHT SLOT
71602-X14LF	2x 7	22.24	15.24	22.16	18.36	RIGHT SLOT
71602-X16LF	2x 8	24.78	17.78	24.70	20.90	2 SLOTS
71602-X18LF	2x 9	27.32	20.32	27.24	23.44	2 SLOTS
71602-X20LF	2x10	29.86	22.86	29.78	25.98	2 SLOTS
71602-X24LF	2x12	34.94	27.94	34.85	31.06	2 SLOTS
71602-X26LF	2x13	37.48	30.48	37.40	33.60	2 SLOTS
71602-X30LF	2x15	42.56	35.56	42.48	38.68	2 SLOTS
71602-X34LF	2x17	47.64	40.64	47.56	43.76	2 SLOTS
71602-X40LF	2x20	55.26	48.26	55.18	51.38	2 SLOTS
71602-X44LF	2x22	60.34	53.34	60.26	56.46	2 SLOTS
71602-X50LF	2x25	67.96	60.96	67.88	64.08	2 SLOTS
71602-X60LF	2x30	80.66	73.66	80.58	76.78	2 SLOTS
71602-X64LF	2x32	85.74	78.74	85.66	81.86	2 SLOTS

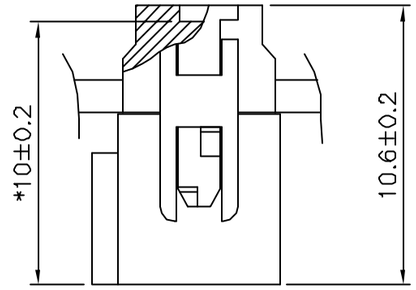


WITHOUT STRAIN RELIEF

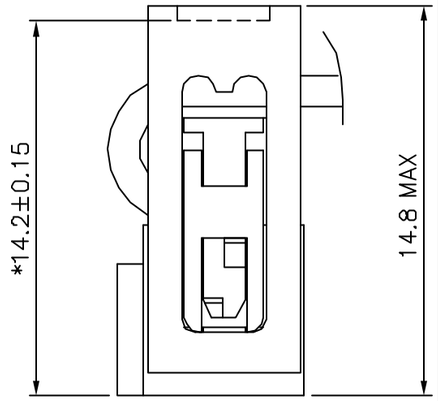

WITH LOW PROFILE STRAIN RELIEF

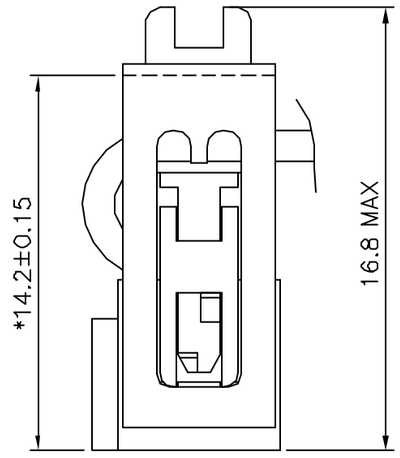

WITH STANDARD STRAIN RELIEF

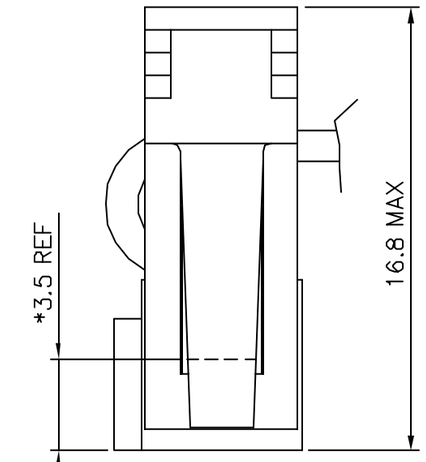

WITH LATCHING STRAIN RELIEF

AFTER TERMINATION SIDE VIEW OF ASSEMBLY (* LATCHING DIM ON HEADER)

PRODUCT NUMBER	WITH CENTRAL KEY	WITHOUT CENTRAL KEY	STANDARD	WITHOUT	LOW PROFILE	LATCHING	DASHES NOT AVAILABLE
			STRAIN RELIEF				
71602-7YYLF		●				●	712 724
71602-6YYLF	●					●	612 624
71602-5YYLF		●			●		504 512 524
71602-4YYLF		●		●			
71602-3YYLF		●	●				304
71602-2YYLF	●				●		204 212 224
71602-1YYLF	●			●			
71602-0YYLF	●		●				004

ltr	ecn no	dr	date
T	FBD615	DLE	98.08.26
U	V11892	DLE	01.08.10
V	FQ3D19	DLE	03.01.23
W	FQ3D99	DLE	03.04.23
X	F06-0270	LMU	06.09.12
Y	F06-0274	LMU	06.08.25

mat'L code | surface ISO 1302 | tolerance ISO 406 ISO 1101 | projection | product family: QKIE FEM

tolerances unless otherwise specified: angles | Linear | mm | scale N/A

dr P.NIZZI 96.02.09 | engr JM PHAMVAN 96.02.09 | chr P. NIZZI 96.02.09 | appd JM P 96.02.09

title: QUICKIE III FEM 0.76µm Au

dwg no 71602 | sheet 2 of - | size A2 | type CUSTOMER Drawing

sheet index | revision sheet

Copyright FCI
FCIconnect.com