
This document was generated on 11/27/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 71718-2000
Status: Active
Overview: LFH™
Description: 1.27mm Pitch LFH™ Matrix 50 Receptacle, Shielded, 200 Circuits, Right Angle

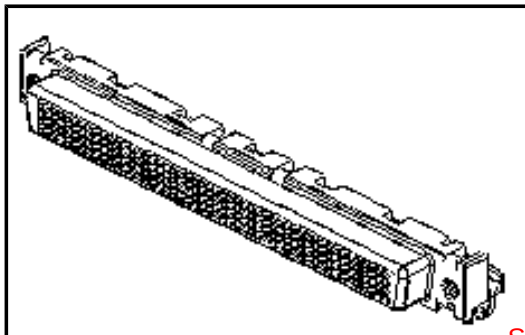

Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-71718-9999 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	I/O Connectors
Series	71718
Application	Wire-to-Board
Component Type	Receptacle
Overview	LFH™
Product Name	LFH™
Type	N/A
UPC	800754353595

Physical

Circuits (Loaded)	200
Circuits (maximum)	200
Color - Resin	Black
Flammability	94V-0
Lock to Mating Part	Yes
Material - Metal	Beryllium Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	19.488/g
Orientation	Right Angle
PC Tail Length	2.01mm
PCB Retention	Yes
PCB Thickness - Recommended	1.27mm
Packaging Type	Tube
Panel Mount	Yes
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-20°C to +80°C
Termination Interface: Style	Surface Mount
Wire Size AWG	N/A

Electrical

Current - Maximum per Contact	1A
Shielded	Yes
Voltage - Maximum	40V

Solder Process Data

Duration at Max. Process Temperature (seconds)	40

EU RoHS
RoHS Compliant by Exemption
REACH SVHC
Not Reviewed
Low-Halogen Status
Low-Halogen

China RoHS

50
Pb

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
71718Series

Mates With
71719 Cable Kit

Use With
71628 Guide Pin . 70982 Hex Screw Kit . 71629 Guide Sleeve . 71771 Guide Sleeve

Lead-free Process Capability	SMC & Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	3
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Product Specification	PS-71718-9999
Sales Drawing	SDA-71718-2***

This document was generated on 11/27/2012

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:
71718-2000