


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.


REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Approvals	03-16-15	LY



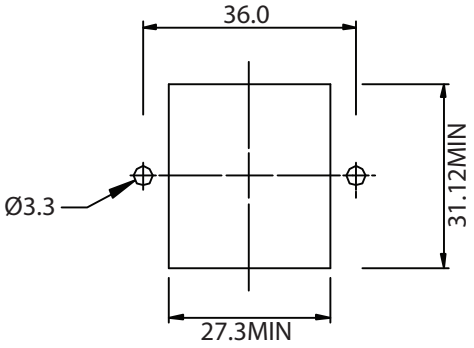

PANEL CUTOUT

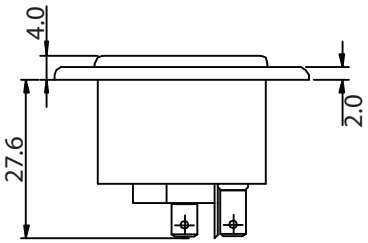



NOTES:

MATERIAL:
MOLDING: NYLON, FLAMMABILITY RATING UL 94V-0
CONTACTS: BRASS. PINS NICKEL PLATED, TAGS TIN PLATED
RATING: 10A 250V AC
CONTACT RESISTANCE: <10 m OHM
INSULATION RESISTANCE: $>10^3$ M OHM
A.C. BREAKDOWN:
POLE-POLE: 5.0kV
POLES-PANEL: 4.0kV
OPERATING TEMPERATURE: -40˚ C TO + 70˚ C
MAX. PIN TEMPERATURE: +65˚ C
APPROVALS: UL, CSA
RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
PPC DIVISION

Part Number: 719-00/63 RoHS Compliant

Description: AC RECEPTACLE

	UNIT: mm	REV. C
Drawn / Date	Checked / Date	Approved / Date
B. ZHANG 04-15-02	04-15-02	JJH / 04-15-02