


2= LOW PROFILE LATCH

PRODUCT NUMBER	SIZE	LATCHING AVAILABILITY	MISSING PIN POSITIONS
71918-X06(LF)	2x3	0/1/2	
71918-X08(LF)	2x4	0/1/2	
71918-X10(LF)	2x5	0/1/2	
71918-X14(LF)	2x7	0/1/2	
71918-X16(LF)	2x8	0/1/2	
71918-X18(LF)	2x9	0/1/2	
71918-X20(LF)	2x10	0/1/2	
71918-X26(LF)	2x13	0/1/2	
71918-X27(LF)	2x13	0/1/2	PIN 21 & 22
71918-X30(LF)	2x15	0/1/2	
71918-X34(LF)	2x17	0/1/2	
71918-X35(LF)	2x17	0/1/2	PIN 2 & 3
71918-X40(LF)	2x20	0/1/2	
71918-X44(LF)	2x22	0/1/2	
71918-X50(LF)	2x25	0/1/2	
71918-X51(LF)	2x25	0/1/2	PIN 39 to 46
71918-X60(LF)	2x30	0/1/2	
71918-X64(LF)	2x32	0/1/2	


PLATING :

- 0.76µm GOLD/GXT
(PdNi WITH GOLD FLASH) ON CONTACT AREA
3.81µm TIN-LEAD ON TAIL
UNDERPLATE : 1.27µm Ni MIN
- WHEN SUFFIX LETTER "LF" IS REQUIRED,
2µm MIN MATTE TIN OVER 1.27µm MIN
NICKEL IS PROVIDED INSTEAD OF TIN-LEAD

LATCHING FEATURES :

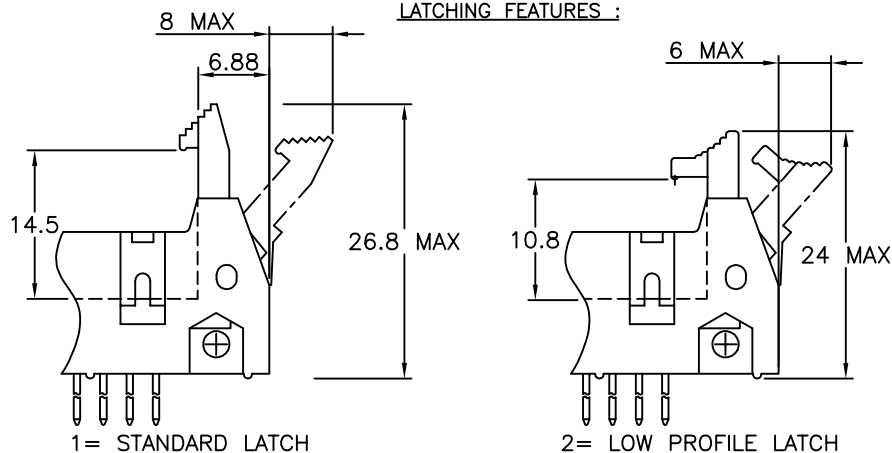

PIN POSITION INDICATION FOR POLARIZED VERSIONS

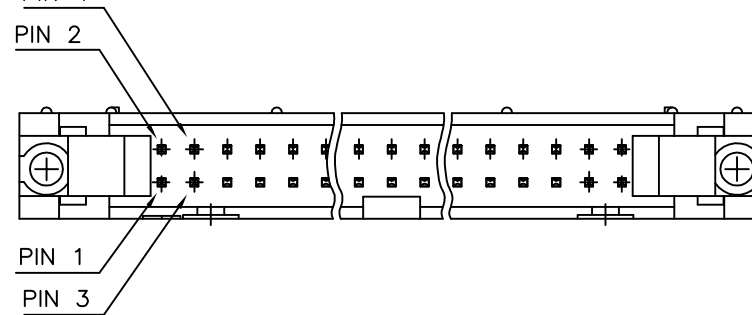

mat'l. code				surface	tolerance	projection	product family
				ISO 1302	ISO 406	ISO 1101	QUICKIE
ltr	ecn no	dr	date	tolerances unless otherwise specified		 mm scale 2:1	title
R	F07-0195	LMU	07.05.25	angles	.X ±0.3		SHR.EL.HEADER
S	F08-0146	YOV	08.04.11	linear	.XX ±0.15		STR DR TMT
T	F12-0011	LMU	12.02.06		.XXX ±0.05		
U	F12-0838	LMU	12.12.06	dr	D.LE	01.01.24	dwg no
				engr	JM.C	01.01.24	sheet 2 of - size
N	F04-0389	LMU	04.12.22	chr	JF.N	01.01.24	71918
P	F06-0229	LMU	06.07.17	appd	JM.C	01.01.24	A3
sheet	revision						type
index	sheet						CUSTOMER Drawing