Silicone Cable

Features

- **Multistranded Very Flexible Copper Core**
- **Wire Gauge: 18AWG**
- **Double Skin Silicone Insulated**
- **Bi–Colored Layers**



NTE Type No.	Length (Feet / Meters)	Color	Quantity
72–003	328 / 100	Black	1 Roll
72–003–12	1 / .304	Black	10 Pieces
72–004	328 / 100	Blue	1 Roll
72–004–12	1 / .304	Blue	10 Pieces
72–005	328 / 100	Green	1 Roll
72–005–12	1 / .304	Green	10 Pieces
72–006	328 / 100	Red	1 Roll
72–006–12	1 / .304	Red	10 Pieces
72–007	328 / 100	White	1 Roll
72–007–12	1 / .304	White	10 Pieces
72–008	328 / 100	Yellow	1 Roll
72–008–12	1 / .304	Yellow	10 Pieces


Specifications

Cable Size: 1.0mm^2 c.s.a. .142" (3.6mm) Dia. Nom. o/a
Wire Gauge: 18AWG
Multistranded Copper Core: 7/36/0.071
IEC1010 Rating: 1000 Volts CAT3 ⧈ 20 Amps
Temperature Rating: –10° to +150°C

Extension Cable Reel

Features

- **Compatible with All Industry Standard 4mm Instrument Sockets & Banana Plug Terminated Test Leads/Probes**
- **Double Insulated, Bi–Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance**
- **Bi–Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent**

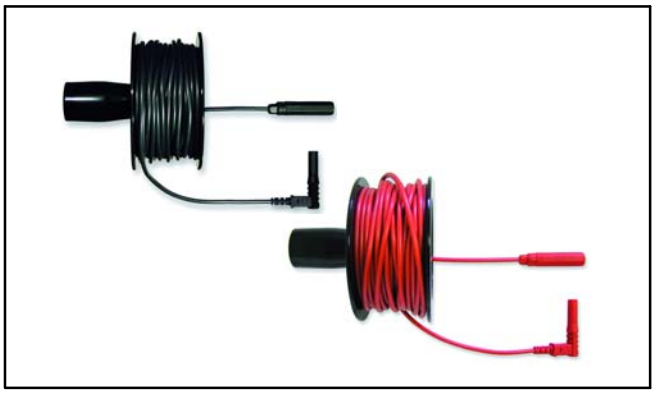

NTE Type No.	Color	Description
72–085	Red	Reel contains just over 40 Feet (12 Meters) of Highly Flexible, Double Skinned Silicone Cable. One end of the lead is terminated in a 4mm Right Angled Plug, the other has a 4mm socket into which the original lead is plugged.
72–102	Black	

Specifications

IEC 1010 Rating: 1000V CAT3 / 600V CAT4 ⧈ 20 Amps

Special Cross Reference Notes

\$ Insulator sold separately.
@ Original is right angle, replacement is straight.