

4mm Panel Socket, 4.8mm Tab, Hex Nut

Features
- **Fully Insulated**
- **Nickel Plated Contacts and Hardware**
- **Accepts Most Types of Shrouded and Unshrouded 4mm Plugs**

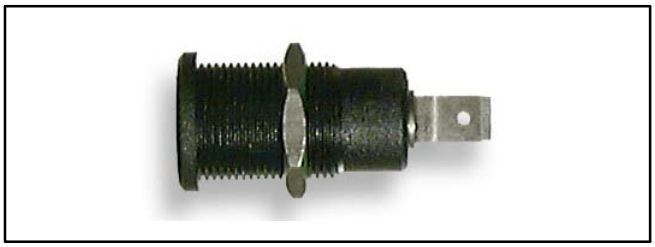

NTE Type No.	Color	Diag No.
72–037	Black	TL–014
72–038	Blue	TL–014
72–039	Green	TL–014
72–040	Red	TL–014
72–041	White	TL–014
72–042	Yellow	TL–014

TL–014

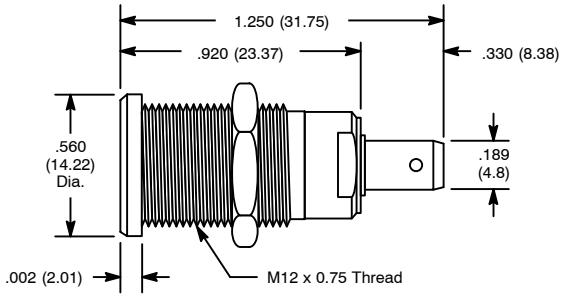


Specifications

IEC 1010 Rating: 1000V CAT2 ▣ 25 Amps
Mounting Hole: .472” (12mm)


4mm Panel Socket, 4.8mm Tab, Push–In

Features
- **Fully Insulated**
- **Nickel Plated Contacts and Hardware**
- **Accepts Most Types of Shrouded and Unshrouded 4mm Plugs**

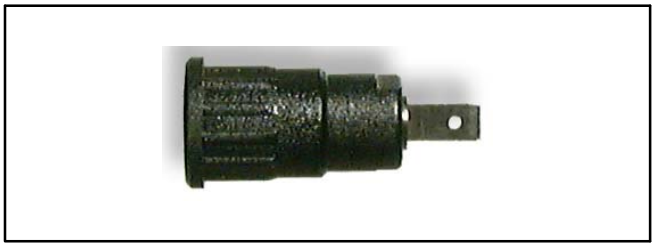

NTE Type No.	Color	Diag No.
72–043	Black	TL–015
72–044	Blue	TL–015
72–045	Green	TL–015
72–046	Red	TL–015
72–047	White	TL–015
72–048	Yellow	TL–015

TL–015

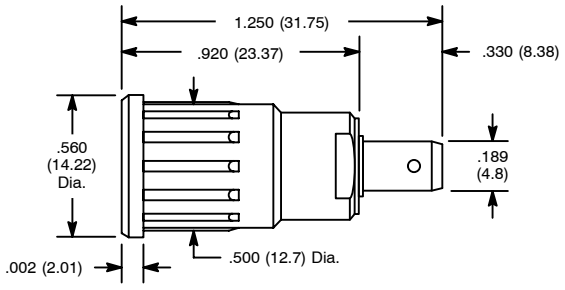

Specifications

IEC 1010 Rating: 1000V CAT2 ▣ 25 Amps
Mounting Hole: .472” (12mm)