


THESE DRAWINGS ARE THE PROPERTY OF QUALTEK ELECTRONICS AND NOT TO BE REPRODUCED FOR OR COMMUNICATED TO A THIRD PARTY WITHOUT THE EXPRESS WRITTEN PERMISSION OF AN OFFICER OF QUALTEK ELECTRONICS.

REVISION			
REV.	DESCRIPTION	DATE	APPROVED
B	RoHS Compliancy	06-01-06	DP
C	Updated Approvals	03-16-15	LY

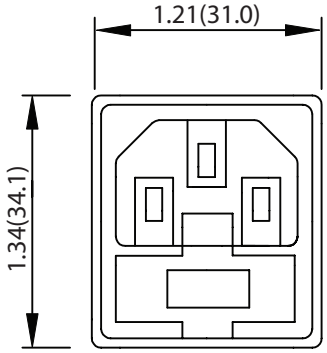

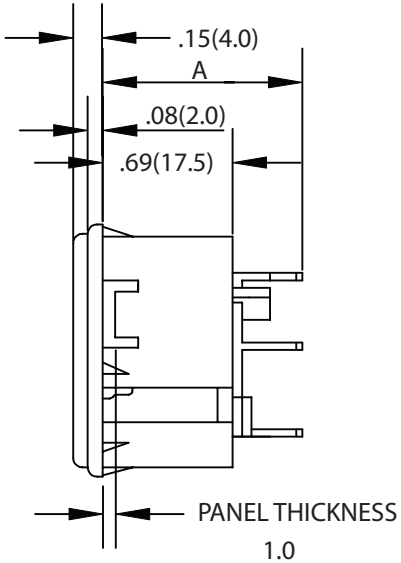

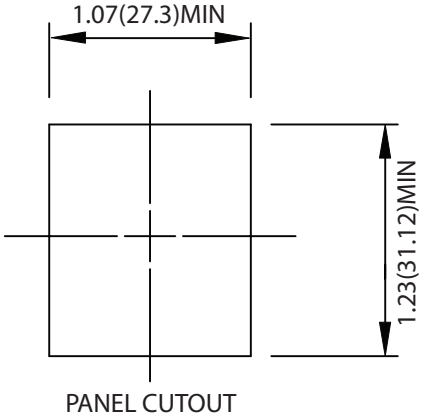

PART No.	DIM. A
723-**/28	27.0
723-**/48	26.5
723-**/63	27.6

** DENOTES PANEL THICKNESS

NOTES:

MAX RATING: 10A 250V AC
CONTACT RESISTANCE: <10m OHM 9<15 OHM INCLUDING FUSEHOLDER
INSULATION RESISTANCE: $>10^3$ M OHM
A.C. BREAKDOWN: POLE - POLE 5.5kV
POLES - PANEL 4.0kV
OPERATING TEMPERATURE: -40˚ C TO 70˚C
MAX. PIN TEMPERATURE: + 65˚ C
MATERIALS:
MOLDING: NYLON, FLAMMABILITY RATING UL 94 V-0
CONTACTS: BRASS, PINS NICKEL PLATED, TAGS TIN PLATED
FUSE NOT INCLUDED, RECOMMENDED FUSE 5 x 20mm
APPROVALS: UL, CSA
RoHS COMPLIANT

CONTROLLED

Dim range (mm)	Tolerance +/- (mm)
0-1	0.15
1-6	0.20
6-18	0.30
18-50	0.50
50-120	0.70
120-250	0.90
250-500	1.20

Qualtek Electronics Corp.
PPC DIVISION

Part Number: 723 SNAP-IN SERIES RoHS Compliant

Description: INLET WITH FUSEHOLDER

	UNIT: in/mm	REV. C
Drawn / Date	Checked / Date	Approved / Date
S.CHEN 06-07-99	06-07-99	JJH / 06-07-99