
polyfet rf devices

LP821

General Description

Silicon VDMOS and LDMOS transistors designed specifically for broadband RF applications. Suitable for Military Radios, Cellular and Paging Amplifier Base Stations, Broadcast FM/AM, MRI, Laser Driver and others.

"Polyfet"^{TM} process features low feedback and output capacitances, resulting in high F_t transistors with high input impedance and high efficiency.

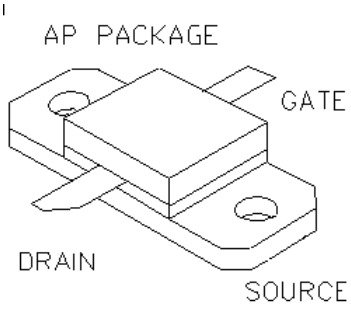

SILICON GATE ENHANCEMENT MODE

RF POWER LDMOS TRANSISTOR

10.0 Watts Single Ended

Package Style AP

HIGH EFFICIENCY, LINEAR

HIGH GAIN, LOW NOISE

ROHS COMPLIANT

ABSOLUTE MAXIMUM RATINGS (T = 25 ^{o}C)

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	DC Drain Current	Drain to Gate Voltage	Drain to Source Voltage	Gate to Source Voltage
50 Watts	3.40 ^{o}C/W	200 ^{o}C	-65 ^{o}C to 150 ^{o}C	5.0 A	36 V	36 V	20 V

RF CHARACTERISTICS (10.0 WATTS OUTPUT)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	12			dB	Idq = 0.40 A, Vds = 12.5 V, F = 500 MHz
η	Drain Efficiency		55		%	Idq = 0.40 A, Vds = 12.5 V, F = 500 MHz
VSWR	Load Mismatch Tolerance			10:1	Relative	Idq = 0.40 A, Vds = 12.5 V, F = 500 MHz


ELECTRICAL CHARACTERISTICS (EACH SIDE)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	36			V	Ids = 0.10 mA, Vgs = 0V
Idss	Zero Bias Drain Current			1.0	mA	Vds = 12.5 V, Vgs = 0V
Igss	Gate Leakage Current			1	uA	Vds = 0V Vgs = 30V
Vgs	Gate Bias for Drain Current	2		5	V	Ids = 0.10 A, Vgs = Vds
gM	Forward Transconductance		1.0		Mho	Vds = 10V, Vgs = 5V
Rdson	Saturation Resistance		0.60		Ohm	Vgs = 20V, Ids = 3.00 A
Idsat	Saturation Current		7.50		Amp	Vgs = 20V, Vds = 10V
Ciss	Common Source Input Capacitance		33.0		pF	Vds = 12.5 Vgs = 0V, F = 1 MHz
Crss	Common Source Feedback Capacitance		2.0		pF	Vds = 12.5 Vgs = 0V, F = 1 MHz
Coss	Common Source Output Capacitance		24.0		pF	Vds = 12.5 Vgs = 0V, F = 1 MHz


1110 Avenida Acaso, Camarillo, Ca 93012 Tel:(805) 484-4210 FAX: (805) 484-3393 EMAIL:Sell@polyfet.com URL:www.polyfet.com

LP821


POUT VS PIN GRAPH

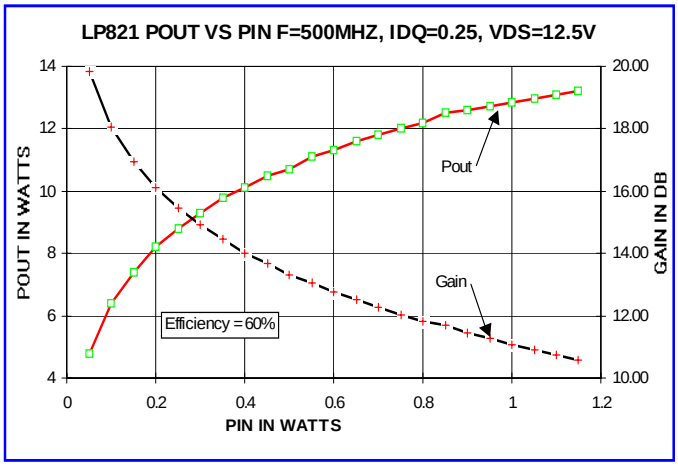


CAPACITANCE VS VOLTAGE

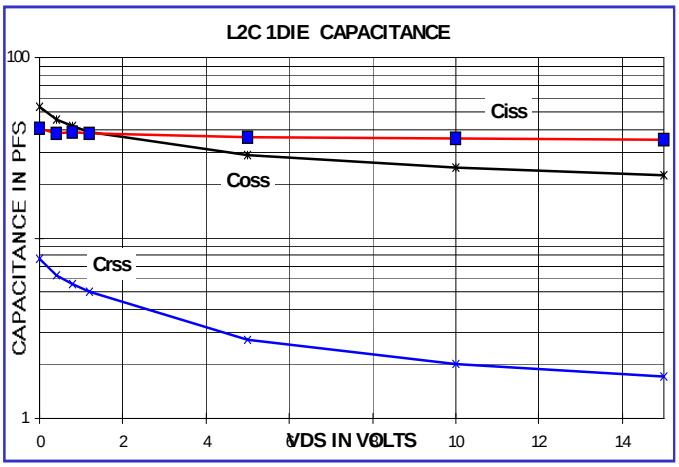


IV CURVE

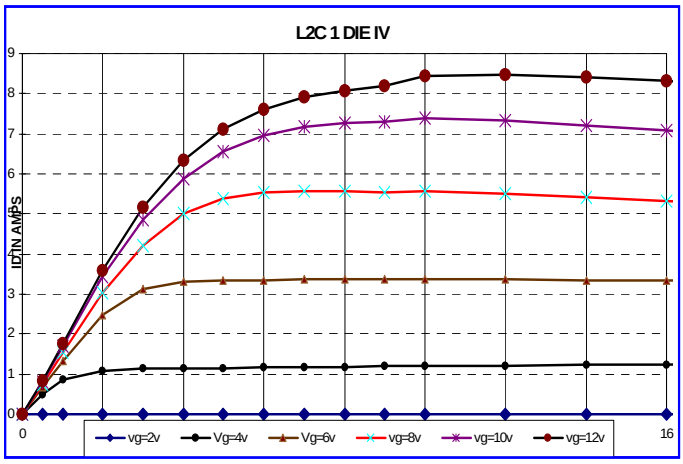

ID & GM VS VGS

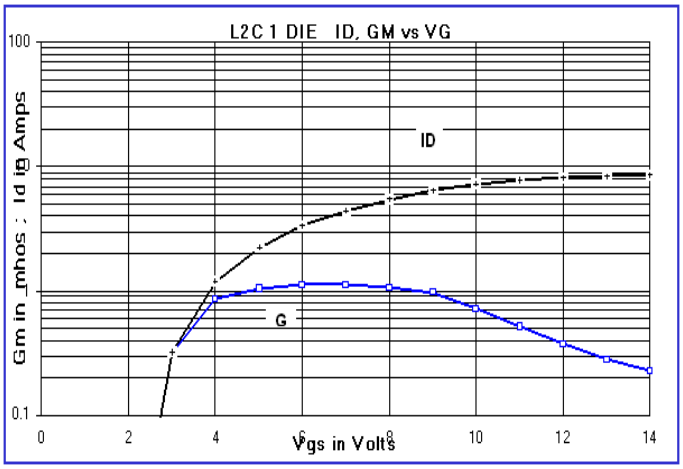


Zin Zout

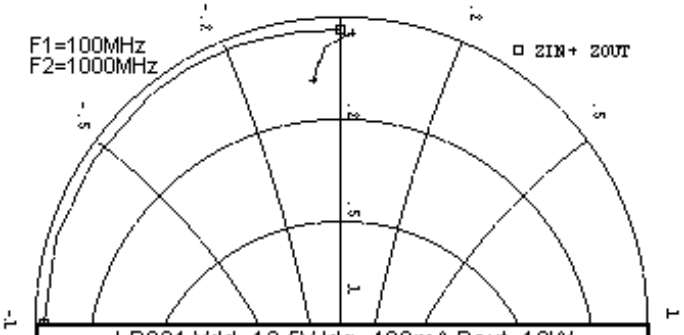

LP821 Vdd=12.5V Idq=400mA Pout=10W

Freq(MHz)	100	250	500	750	1000
Zin	1.5	0.8	0.8	1.0	1.0
	-j50	-j18	-j7	-j2.5	-j0
Zout	5.6	4	3.7	2.5	1.2
	-j2.7	-j2.2	-j1.9	-j1.4	-j1.0

PACKAGE DIMENSIONS IN INCHES

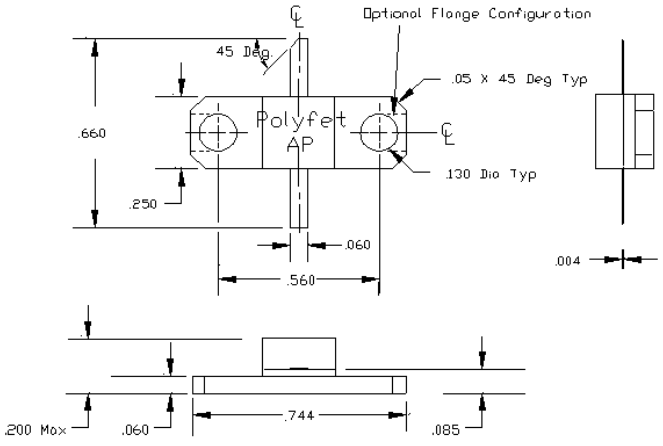

Polyfet AP Package

Tolerance .XX +/-0.01 .XXX +/-.005 inches

POLYFET RF DEVICES REVISION 10/01/2007

1110 Avenida Acaso, Camarillo, Ca 93012 Tel:(805) 484-4210 FAX: (805) 484-3393 EMAIL:Sell@polyfet.com URL:www.polyfet.com