

Crystal Oscillator


Model Name 7311S-GG Simple Packaged Crystal Oscillator (SPXO) 7300 Series

■ Main Application

For SONET-, SDH-, and GbEthernet-related equipment

■ Features

- Power supply voltage and LVDS output level are 2.5 V and 62.5 to 220 MHz, respectively.
- Ultra-compact with dimensions of 7.0 x 5.0 x 1.7 mm.
- A surface-mount crystal oscillator.

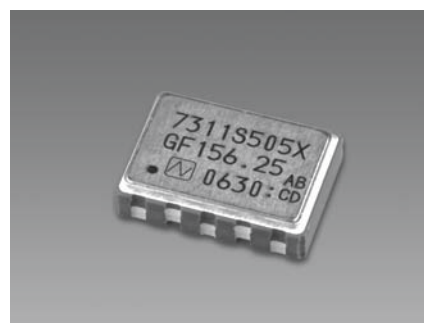


**Pb
Free**

RoHS Compliant
Directive 2002/95/EC

■ Specifications

Item	Model Classification	7311S-GG-XXXX
		XXXX : 255R, 505X, 104X
Standard nominal frequency (MHz)		106.25, 125, 155.252, 156.25, 161.1328, 187.5, 212.5
Power supply voltage		+2.5V DC $\pm 5\%$
Load		100 Ω (Pad #4-#5)
Operating temperature range		0 to 70°C, 0 to 85°C
Comprehensive frequency stability		$\pm 25 \times 10^{-6} \text{max} / 0 \text{ to } 70^\circ\text{C}$ (255R)
		$\pm 50 \times 10^{-6} \text{max} / 0 \text{ to } 85^\circ\text{C}$ (505X)
		$\pm 100 \times 10^{-6} \text{max} / 0 \text{ to } 85^\circ\text{C}$ (104X)
Consumption current	During operation	43mA typ. (60mA max)
	During standby	30 μ A max.
Output level		LVDS level (Complementary)
Duty cycle		45 to 55% (at Waveform)
Phase jitter (1 σ)		1ps max. (12KHz to 20MHz)
Standby function (tristate)		Available

■ Dimensions

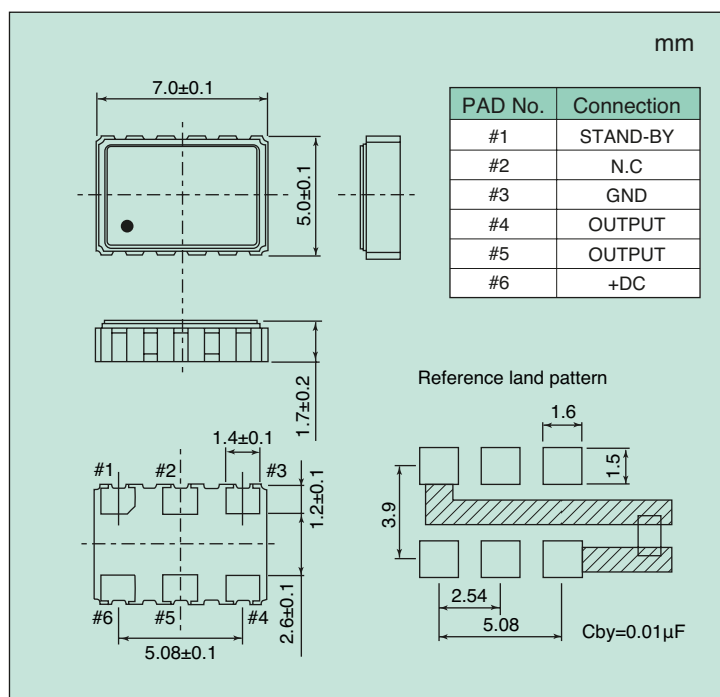

■ Standby Function Table (Tristate)

#1 Input	#4 and #5 output
Level H ($V_{IH} \geq 0.7 V_{CC}$) or OPEN is selected.	Oscillation output ON
Level L ($V_{IL} \leq 0.3 V_{CC}$)	High impedance

■ Number for specifying an order (+2.5V LVDS)

Comprehensive frequency stability	Nominal frequency range (MHz)
	$62.5 \leq F < 220$
$\pm 25 \times 10^{-6} \text{max} / 0 \text{ to } 70^\circ\text{C}$	NSA3344D
$\pm 50 \times 10^{-6} \text{max} / 0 \text{ to } 85^\circ\text{C}$	NSA3345D
$\pm 100 \times 10^{-6} \text{max} / 0 \text{ to } 85^\circ\text{C}$	NSA3346D

■ How to Specify an Order

Model name	—	Frequency (up to 9 digits)	M	—	Number for specifying an order
------------	---	-------------------------------	---	---	-----------------------------------

When ordering +2.5V, $\pm 100 \times 10^{-6} \text{max} / 0 \text{ to } 85^\circ\text{C}$, 125MHz
7311S-GG-104X-125.000000M-NSA3346D

If you have any queries concerning our standard frequencies and numbers for specifying orders, please contact our sales representatives or visit our homepage (<http://www.ndk.com/>).