
RF Wideband Transformer 7336-1

A compact SMD wideband transformer with excellent dielectric strength to meet North American and European standards for reinforced insulation.

Meets safety codes: UL 1950
CSA C22.2 No.950
BSI & TUV EN 60950



MECHANICAL (All dimensions in millimetres)

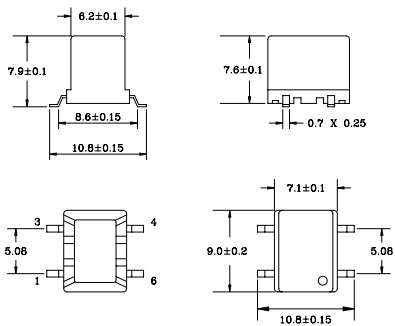

SCHEMATIC



ELECTRICAL SPECIFICATIONS @ 25˚C

Part Number	Impedance (Ω)	Insertion Loss (dB MAX)	Frequency Response (dB MAX)	Dielectric Strength (VAC)
		50 - 100 MHz	3 - 25 MHz	
7336 - 1	50/50	6	0.2	3000

ISSUE: P2 28/05/02 7336-1

229 Colonnade Road, Ottawa, Ontario, Canada K2E 7K3
Tel: (613) 226-1626 Fax: (613) 226-7124 www.filtran.com