

Coaxial High Power Combiner

ZA3CS-400-3W+

3 Way-0° 50Ω 2 to 400 MHz



SMA version shown
CASE STYLE: CC51

Connectors	Model
BNC	ZA3CS-400-3W+
N-TYPE	ZA3CS-400-3W-N+
SMA	ZA3CS-400-3W-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 90°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2
PORT 3	3

Outline Drawing

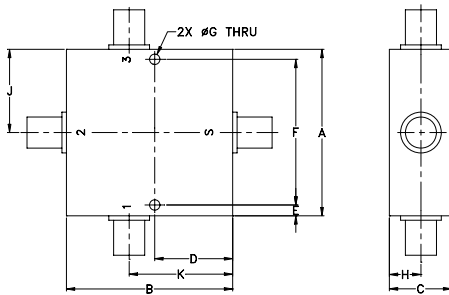

Outline Dimensions (inch/mm)

A	B	C	D	E	F
2.00	2.00	.75	.938	.13	1.750
50.80	50.80	19.05	23.83	3.30	44.45
G	H	J	K	wt	
.125	.38	1.00	1.25	grams	
3.18	9.65	25.40	31.75	200.0	

Features

- wideband, 2 to 400 MHz
- low insertion loss, 0.5 dB typ.
- good isolation, 25 dB typ.
- very low amplitude, 0.15 dB typ. and phase unbalance, 0.2 deg. typ.

Applications

- VHF/UHF
- communication receivers & transmitters

High Power Combiner Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 4.8 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)		POWER INPUT ¹ (W)	
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	as combiner ² Max.	as splitter Max.
2-400	25	17	0.5	1.2	0.2	3.0	0.15	0.5	3	10




1. Over -55°C to +55°C. Derate linearly to 20% of rating at 90°C

2. As a combiner of non-coherent signals, max. power per port is power rating divided by number of ports.

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
2.00	4.99	4.98	4.98	0.01	23.18	23.18	23.02	0.06	1.37	1.10	1.10	1.11
6.00	4.99	4.99	4.99	0.00	23.80	23.80	23.77	0.11	1.36	1.04	1.04	1.04
16.00	4.98	4.97	4.98	0.01	23.75	23.73	23.74	0.05	1.35	1.02	1.02	1.02
40.00	4.97	4.97	4.97	0.01	23.42	23.38	23.41	0.19	1.34	1.02	1.01	1.01
104.00	5.05	5.04	5.06	0.02	22.61	22.61	22.63	0.50	1.36	1.03	1.03	1.03
152.00	5.13	5.10	5.14	0.05	22.10	22.09	22.13	0.72	1.39	1.05	1.05	1.05
200.00	5.20	5.17	5.24	0.07	21.99	21.91	22.04	0.85	1.40	1.07	1.08	1.08
230.00	5.18	5.12	5.21	0.09	22.19	22.03	22.22	0.98	1.41	1.08	1.10	1.10
260.00	5.34	5.26	5.37	0.11	22.61	22.32	22.62	1.18	1.40	1.10	1.12	1.12
290.00	5.29	5.19	5.33	0.14	23.24	22.81	23.29	1.13	1.37	1.12	1.14	1.14
320.00	5.31	5.19	5.37	0.18	24.69	23.95	24.71	1.21	1.34	1.13	1.17	1.16
350.00	5.40	5.27	5.47	0.20	27.12	25.85	27.11	1.31	1.29	1.15	1.19	1.17
380.00	5.50	5.34	5.59	0.25	31.55	29.07	31.52	1.52	1.23	1.16	1.21	1.19
390.00	5.51	5.34	5.58	0.24	34.00	30.80	34.05	1.50	1.21	1.16	1.22	1.19
400.00	5.51	5.31	5.59	0.28	37.10	33.25	37.43	1.53	1.20	1.16	1.23	1.20

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

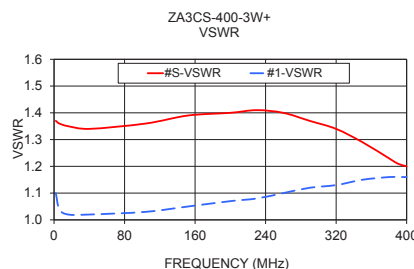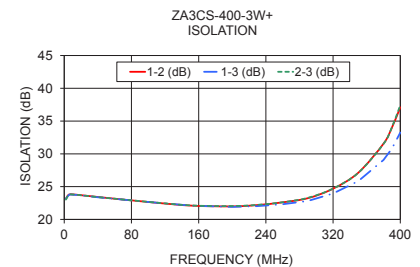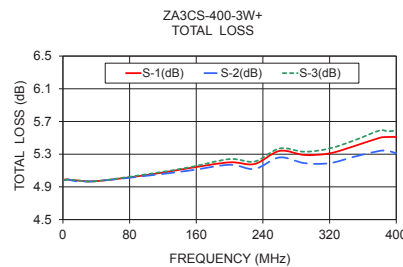

electrical schematic



Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

