To our customers,

Old Company Name in Catalogs and Other Documents

On April 1st, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: http://www.renesas.com

April 1st, 2010
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (http://www.renesas.com)

Send any inquiries to http://www.renesas.com/inquiry.

Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: “Standard”, “High Quality”, and “Specific”. The recommended applications for each Renesas Electronics product depends on the product’s quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as “Specific” without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as “Specific” or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is “Standard” unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

   “Standard”: Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

   “High Quality”: Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

   “Specific”: Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) “Renesas Electronics” as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) “Renesas Electronics product(s)” means any product developed or manufactured by or for Renesas Electronics.

RENESAS

PRELIMINARY DATA SHEET

LASER DIODE

NX8511UD

1 550 nm FOR LONG HAUL 2.5 Gb/s InGaAsP MQW-DFB LASER DIODE TOSA

DESCRIPTION

The NX8511UD is a 1 550 nm Multiple Quantum Well (MQW) structured Distributed Feed-Back (DFB) laser diode TOSA (transmitter optical sub-assembly) with InGaAs monitor PIN-PD in a receptacle type package designed for SFF/SFP transceiver with LC duplex receptacle.

This device is ideal for Synchronous Digital Hierarchy (SDH) system, long haul STM-16 (L-16.2), ITU-T recommendations, and SONET OC-48 (LR-2).



FEATURES


- Peak emission wavelength λ_p = 1 550 nm
- Optical output power P_f = 2.0 mW
- Wide operating temperature range T_C = –20 to +85°C
- Side mode suppression ratio SMSR = 40 dB
- InGaAs monitor PIN-PD
- Internal optical isolator
- Based on Telcordia reliability

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all devices/types available in every country. Please check with local NEC Compound Semiconductor Devices representative for availability and additional information.


Document No. PL10446EJ01V0DS (1st edition)
Date Published January 2004 CP(K)
Printed in Japan

© NEC Compound Semiconductor Devices 2004

PACKAGE DIMENSIONS (UNIT: mm)

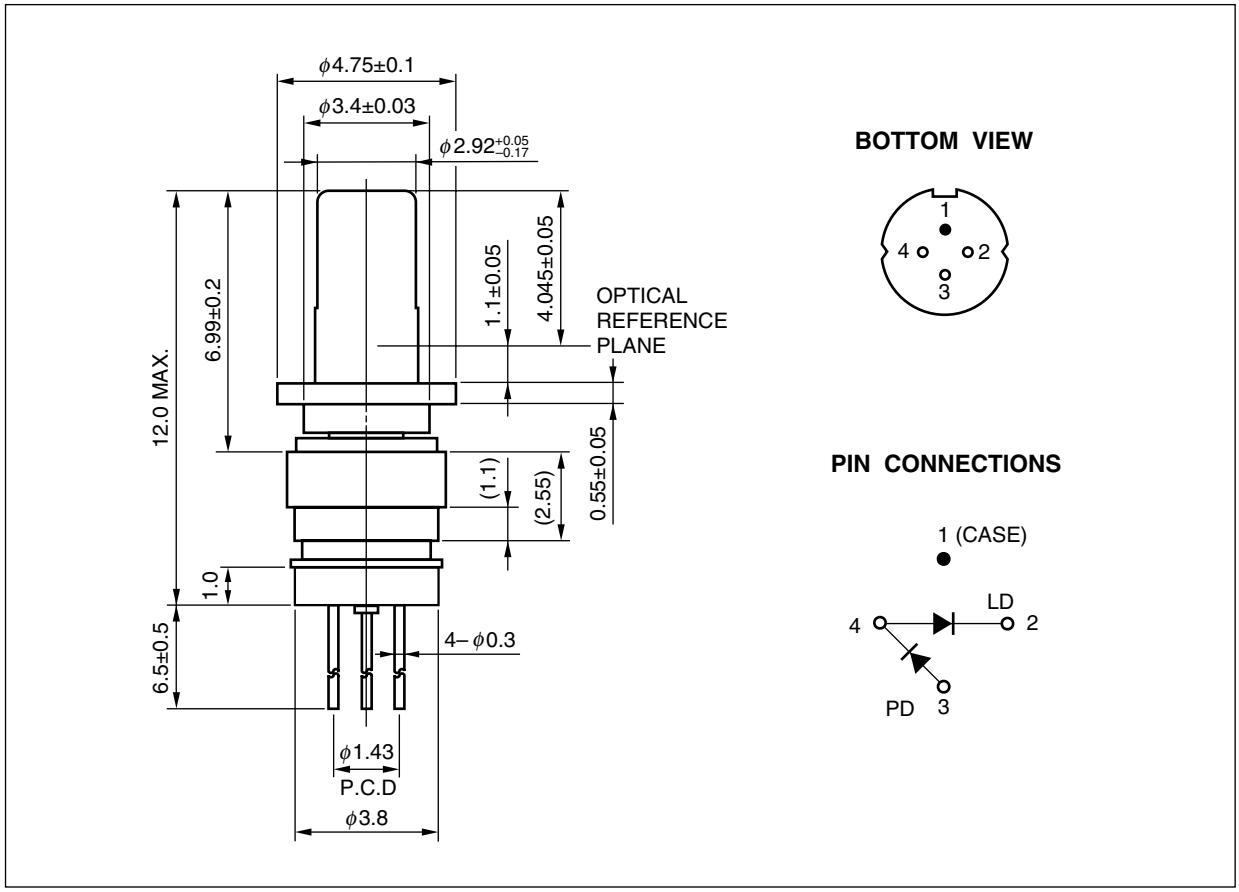

ORDERING INFORMATION

Part Number	Package	Pin Connections
NX8511UD	φ3.8 mm TOSA	

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Ratings	Unit
Optical Output Power from Fiber	P_f	5.0	mW
Forward Current of LD	I_F	150	mA
Reverse Voltage of LD	V_R	2.0	V
Forward Current of PD	I_F	2.0	mA
Reverse Voltage of PD	V_R	15	V
Operating Case Temperature	T_C	–20 to +85	°C
Storage Temperature	T_{stg}	–40 to +85	°C
Lead Soldering Temperature	T_{sld}	350 (3 sec.)	°C
Relative Humidity (noncondensing)	RH	85	%

ELECTRO-OPTICAL CHARACTERISTICS (T_C = –20 to +85°C, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Optical Output Power from Fiber	P_f	CW		2.0		mW
Operating Voltage	V_{op}	P_f = 2.0 mW		1.1	1.6	V
Threshold Current	I_{th}	T_C = 25°C		10	20	mA
					50	
Threshold Output Power	P_{th}	$I_F = I_{th}$			100	μW
Differential Efficiency	η_d	P_f = 2.0 mW, T_C = 25°C	0.07	0.1		W/A
		P_f = 2.0 mW	0.04			
Peak Emission Wavelength	λ_p	CW, P_f = 2.0 mW	1 530	1 550	1 570	nm
Side Mode Suppression Ratio	SMSR	P_f = 2.0 mW	30	40		dB
Rise Time	t_r	20-80%, P_{pk} = 2.0 mW, $I_F = I_{th}$			100	ps
Fall Time	t_f	80-20%, P_{pk} = 2.0 mW, $I_F = I_{th}$			150	ps
Monitor Current	I_m	V_R = 1.5 V, P_f = 1.0 mW	100	500	1 000	μA
Monitor Dark Current	I_D	V_R = 1.5 V, T_C = 25°C		0.1	50	nA
		V_R = 1.5 V		10	500	
Tracking Error	γ	I_m = const.	–1.0		1.0	dB
Connector Repeatability	–	With master pigtail	–1.0		1.0	dB

LD ϕ3.8 mm FP-TOSA PACKAGES FAMILY FOR OPTICAL FIBER COMMUNICATIONS

Part Number	Absolute Maximum Ratings		Electro-Optical Characteristics				Application	Package
			@T_C = 25°C	@T_C				
	T_C (°C)	T_{stg} (°C)	I_{th} (mA)	P_f (mW)	λ_C (nm)			
			TYP.	TYP.	MIN.	MAX.		
NX7312UA	−40 to +85	−40 to +85	8	0.2	1 274	1 356	156 Mb/s: STM-1 (S-1.1)	ϕ3.8 mm TOSA
							622 Mb/s: STM-4 (S-4.1)	
NX7313UA	−40 to +85	−40 to +85	8	0.6	1 270	1 355	1.25 Gb/s: GbE	ϕ3.8 mm TOSA
NX7314UA	−40 to +85	−40 to +85	8	1.0	1 263	1 360	156 Mb/s: STM-1 (L-1.1)	ϕ3.8 mm TOSA
NX7315UA	−40 to +85	−40 to +85	8	0.6	1 266	1 360	2.5 Gb/s: STM-16 (I-16)	ϕ3.8 mm TOSA

LD ϕ3.8 mm DFB-TOSA PACKAGES FAMILY FOR OPTICAL FIBER COMMUNICATIONS

Part Number	Absolute Maximum Ratings		Electro-Optical Characteristics				Application	Package
			@T_C = 25°C	@T_C				
	T_C (°C)	T_{stg} (°C)	I_{th} (mA)	P_f (mW)	λ_p (nm)			
			TYP.	TYP.	MIN.	MAX.		
NX8310UA	−40 to +85	−40 to +85	10	2.0	1 280	1 335	622 Mb/s: STM-4 (L-4.1)	ϕ3.8 mm TOSA
NX8311UD	−20 to +85	−40 to +85	10	2.0	1 280	1 335	2.5 Gb/s: STM-16 (L-16.1)	ϕ3.8 mm TOSA
NX8312UA	−20 to +85	−40 to +85	10	1.0	1 280	1 335	2.5 Gb/s: STM-16 (S-16.1)	ϕ3.8 mm TOSA
NX8312UD	−20 to +85	−40 to +85	10	1.0	1 280	1 335	2.5 Gb/s: STM-16 (S-16.1)	ϕ3.8 mm TOSA
NX8510UD Series	0 to +70	−40 to +85	10	2.0	λ_p−3 *1	λ_p+3 *1	2.5 Gb/s: CWDM	ϕ3.8 mm TOSA
NX8511UD	−20 to +85	−40 to +85	10	2.0	1 530	1 570	2.5 Gb/s: STM-16 (L-16.2)	ϕ3.8 mm TOSA

***1** Available for CWDM Wavelengths based on ITU-T recommendations
λ_p = 1 470, 1 490, 1 510, 1 530, 1 550, 1 570, 1 590, 1 610 nm


REFERENCE


Document Name	Document No.
OPTICAL SEMICONDUCTOR DEVICES FOR FIBEROPTIC COMMUNICATIONS SELECTION GUIDE	PL10161E
Opto-Electronics Devices Pamphlet	PX10160E

- **The information in this document is current as of January, 2004. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:
  "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.
  "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
  "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
  "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.
  The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.
  (Note)
  (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
  (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

SAFETY INFORMATION ON THIS PRODUCT





Warning Laser Beam	A laser beam is emitted from this diode during operation. The laser beam, visible or invisible, directly or indirectly, may cause injury to the eye or loss of eyesight. • Do not look directly into the laser beam. • Avoid exposure to the laser beam, any reflected or collimated beam.
Caution GaAs Products	This product uses gallium arsenide (GaAs). GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points. • Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below. 1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials. 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal. • Do not burn, destroy, cut, crush, or chemically dissolve the product. • Do not lick the product or in any way allow it to enter the mouth.

▶**For further information, please contact**

NEC Compound Semiconductor Devices, Ltd. **http://www.ncsd.necel.com/**
E-mail: salesinfo@ml.ncsd.necel.com (sales and general)
techinfo@ml.ncsd.necel.com (technical)
5th Sales Group, Sales Division TEL: +81-44-435-1588 FAX: +81-44-435-1579

NEC Compound Semiconductor Devices Hong Kong Limited
E-mail: ncsd-hk@elhk.nec.com.hk (sales, technical and general)
Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309
Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859
Korea Branch Office TEL: +82-2-558-2120 FAX: +82-2-558-5209

NEC Electronics (Europe) GmbH **http://www.ee.nec.de/**
TEL: +49-211-6503-01 FAX: +49-211-6503-487

California Eastern Laboratories, Inc. **http://www.cel.com/**
TEL: +1-408-988-3500 FAX: +1-408-988-0279

0310