
ATM Equivalent – Low Voltage Miniature Automotive, Fast Acting


Features

- Miniature Blade Type
- RoHS Compliant

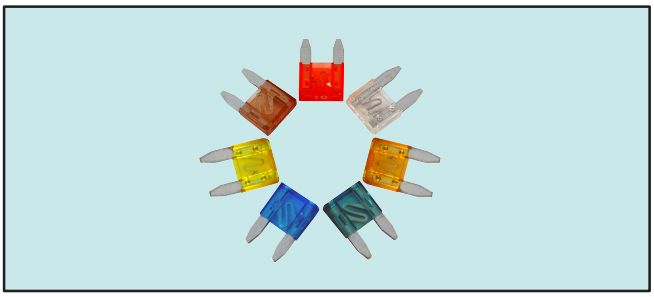

	NTE Type No.	Rated Current	Color Code	Diag No.
NEW	74–MAF2A	2A	Gray	F–05
NEW	74–MAF3A	3A	Violet	F–05
NEW	74–MAF4A	4A	Pink	F–05
	74–MAF5A	5A	Tan	F–05
	74–MAF7.5A	7.5A	Brown	F–05
	74–MAF10A	10A	Red	F–05
	74–MAF15A	15A	Blue	F–05
	74–MAF20A	20A	Yellow	F–05
	74–MAF25A	25A	Natural	F–05
	74–MAF30A	30A	Green	F–05

F–05

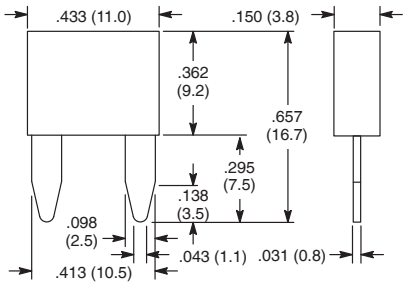

Specifications

Rated Voltage: 32V

Time Current Characteristics:

% of Ampere Rating	Opening Time
110%	4 hours min.
135%	0.75 – 1800 seconds
200%	0.15 – 5 seconds
300%	0.08 seconds max.


Accessories:

Description	NTE Type No.
In–Line Fuse Holder, up to 15A	74–IFHMA15
In–Line Fuse Holder, up to 30A	74–IFHMA30
In–Line Fuse Holder w/LED Light, up to 15A	74–IFHMAL15
In–Line Fuse Holder w/LED Light, up to 30A	74–IFHMAL30

ATC Equivalent - Low Voltage Automotive, Fast Acting


Features

- Fast Acting
- RoHS Compliant

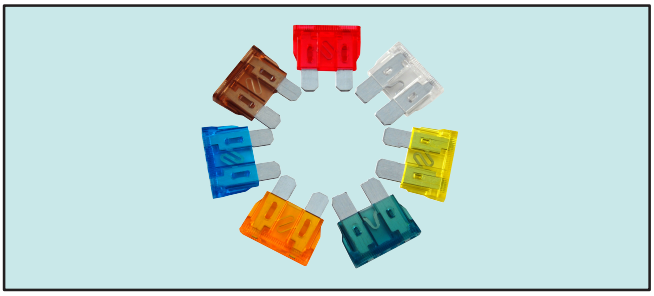

	NTE Type No.	Rated Current	Color Code	Diag No.
NEW	74–AF1A	1A	Black	F–06
NEW	74–AF2A	2A	Gray	F–06
NEW	74–AF3A	3A	Violet	F–06
NEW	74–AF4A	4A	Pink	F–06
	74–AF5A	5A	Tan	F–06
	74–AF7.5A	7.5A	Brown	F–06
	74–AF10A	10A	Red	F–06
	74–AF15A	15A	Blue	F–06
	74–AF20A	20A	Yellow	F–06
	74–AF25A	25A	Natural	F–06
	74–AF30A	30A	Green	F–06

F–06

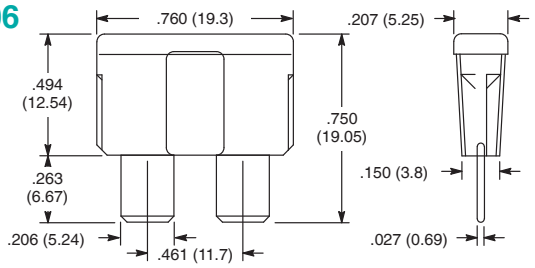

Specifications

Rated Voltage: 32V

Time Current Characteristics:

% of Ampere Rating	Opening Time
110%	100 hours min.
135%	1800 seconds max.
200%	5 seconds max.
300%	0.08 seconds max.

Accessories:

Description	NTE Type No.
In–Line Fuse Holder, up to 15A	74–IFHA15
In–Line Fuse Holder, up to 30A	74–IFHA30
In–Line Fuse Holder w/LED Light, up to 15A	74–IFHAL15
In–Line Fuse Holder w/LED Light, up to 30A	74–IFHAL30