SHARP

Under development	
New product	●

PQxxxDZ01Z series Low Power-Loss Voltage Regulator

SC-63 Package, Low Power-Loss Voltage Regulator

■ Features

(1) Output current :1 A
(2) Low dropout voltage: MAX. 0.5 V(Io=o.5 A)
(3) Built-in ON/OFF control function
(4) Built-in overcurrent protection, overheat protection
(5) SC-63 package.


■ Applications

(1) AV equipment.
(2) OA equipment.

■ Model Line-up

Package type	Output voltage(V_O)	
	3.3 V	5.0 V
Taping	**PQ033DZ01ZP**	**PQ050DZ01ZP**
Sleeve	**PQ033DZ01ZZ**	**PQ050DZ01ZZ**

■ Outline Dimensions (Unit : mm)

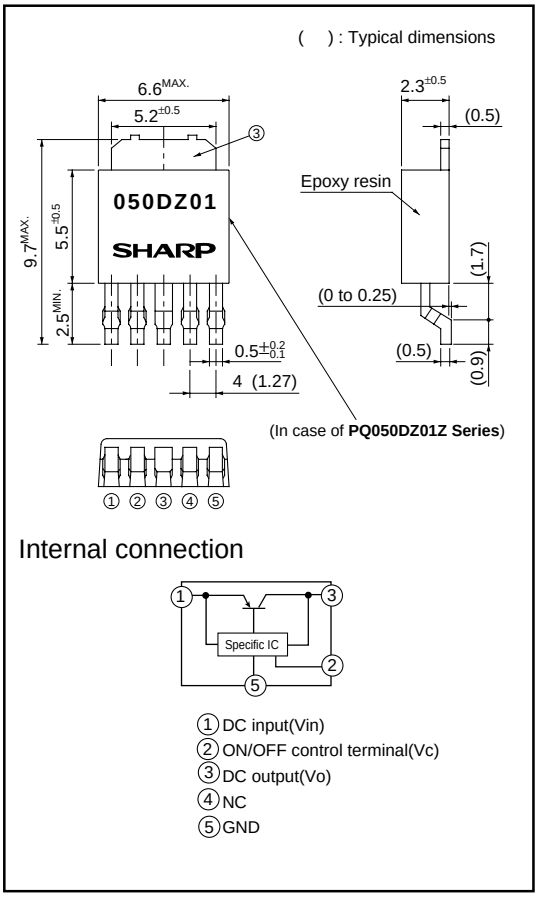

Internal connection

① DC input(Vin)
② ON/OFF control terminal(Vc)
③ DC output(Vo)
④ NC
⑤ GND

■ Absolute Maximum Ratings (Ta=25˚C)

Parameter	Symbol	Ratings		Unit
		PQ033DZ01Z	PQ050DZ01Z	
*1 Input voltage	V_{in}	9	10	V
*1 ON/OFF control terminal voltage	V_C	9	10	V
Output current	I_O	1		A
*2 Power dissipation	P_d	5		W
*3 Junction temperature	T_j	150		˚C
Operating temperature	T_{opr}	- 30 to +85		˚C
Storage temperature	T_{stg}	- 40 to +150		˚C
Soldering temperature	T_{sol}	260 (for 10s)		˚C

*1 All are open except GND and applicable terminals.
*2 Pd: With infinite heat sink.
*3 Overheat protection may operate at 125≤Tj≤150˚C.

(Notice)
•In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.
•Specifications are subject to change without notice for improvement.
(Internet)
•Data for Sharp's optoelectronic/power devices is provided on internet. (Address http://sharp-world.com/ecg/)


■ Electrical Characteristics

(Unless otherwise specified,Vin=Vo(TYP.)+2V,Io=0.5A,Vc=2.7V,Ta=25˚C)


Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	**PQ033DZ01Z**	Vo	-	3.201	3.3	3.399	V
	PQ050DZ01Z			4.85	5.0	5.15	
Load regulation		RegL	Io=5mA to 1.0A	-	0.1	1.0	%
Line regulation		RegI	*4 , Io=5mA	-	0.1	1.0	%
Temperature coefficient of output voltage		TcVo	Tj=0 to125˚C,Io=5mA	-	±0.01	-	%/˚C
Ripple rejection		RR	-	-	60	-	dB
Dropout voltage		Vi-o	*5, Io=0.5 A	-	0.2	0.5	V
*6 ON-state voltage for control		$V_{C(on)}$	-	2.0	-	-	V
ON-state current for control		$I_{C(on)}$	V_C=2.7V	-	-	200	µA
OFF-state voltage for control		$V_{C(off)}$	-	-	-	0.8	V
OFF-state current for control		$I_{C(off)}$	V_C=0.4V	-	-	2	µA
Quiescent current		Iq	Io=0A	-	3	5	mA
Output OFF-state dissipation current		Iqs	Io=0A, V_C=0.4V	-	-	5	µA

*4 **PQ033DZ01Z** : Vin = 4.3 to 8.3 V, **PQ050DZ01Z**:Vin =6 to 10 V
*5 **PQ033DZ01Z** : Vin = 3.7 V
PQ050DZ01Z : Input voltage shall be the value when output voltage is 95% in comparison with the initial value.
*6 In case of opening control terminal②, output voltage turns off.

■ Standard Test Circuit

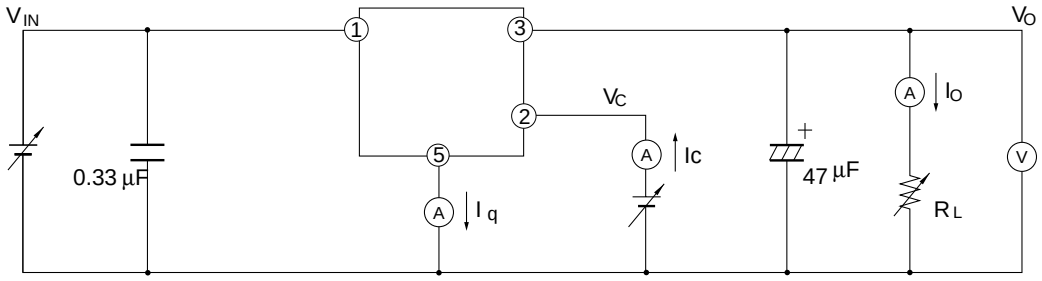

■ Test Circuit for Ripple Rejection

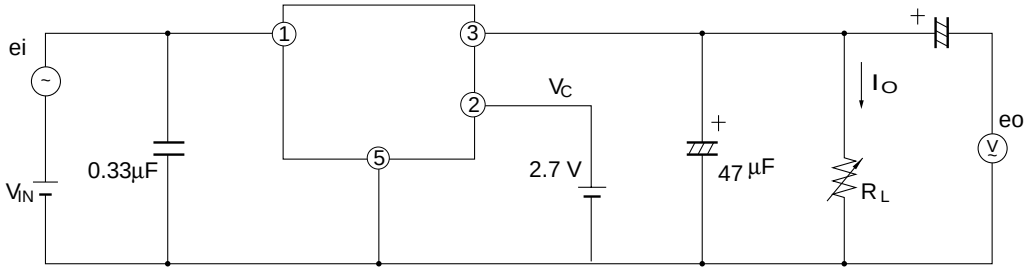

f=120Hz(sine wave)
ei(rms)=0.5 V
Vin=7 V
Vin=5.3 V

Io=0.3 A
RR=20log(ei(rms)/eo(rms))

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:

  (i) The devices in this publication are designed for use in general electronic equipment designs such as:
  --- Personal computers
  --- Office automation equipment
  --- Telecommunication equipment [terminal]
  --- Test and measurement equipment
  --- Industrial control
  --- Audio visual equipment
  --- Consumer electronics

  (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
  --- Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
  --- Traffic signals
  --- Gas leakage sensor breakers
  --- Alarm equipment
  --- Various safety devices, etc.

  (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
  --- Space applications
  --- Telecommunication equipment [trunk lines]
  --- Nuclear power control equipment
  --- Medical and other life support equipment (e.g., scuba).

- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.