PRELIMINARY
Notice ; This is not a final specification.
some parametric limits are subject to change.

M62494SP/FP

SOUND CONTROLLER FOR TV


SRS (●)
everything else is only stereo™

SRS 3D Stereo + SRS 3D Mono 1Chip


OUTLINE

M62494 has SRS 3D STEREO and SRS 3D MONO.
There are three modes, those are SRS 3D stereo SRS 3D mono and bypass.
Each mode can be set by terminals.

PACKAGE OUTLINE



20P4B(SP)



20P2N(FP)

FEATURE

- Each mode can be set by terminals.
- Mute Function


APPLICATION

- TV , Mini-Stereo , etc


RECOMMENDED OPERATING CONDITION

- Supply voltage range 6 ~ 9.5V
- Rated supply voltage 9V

SYSTEM BLOCK DIAGRAM

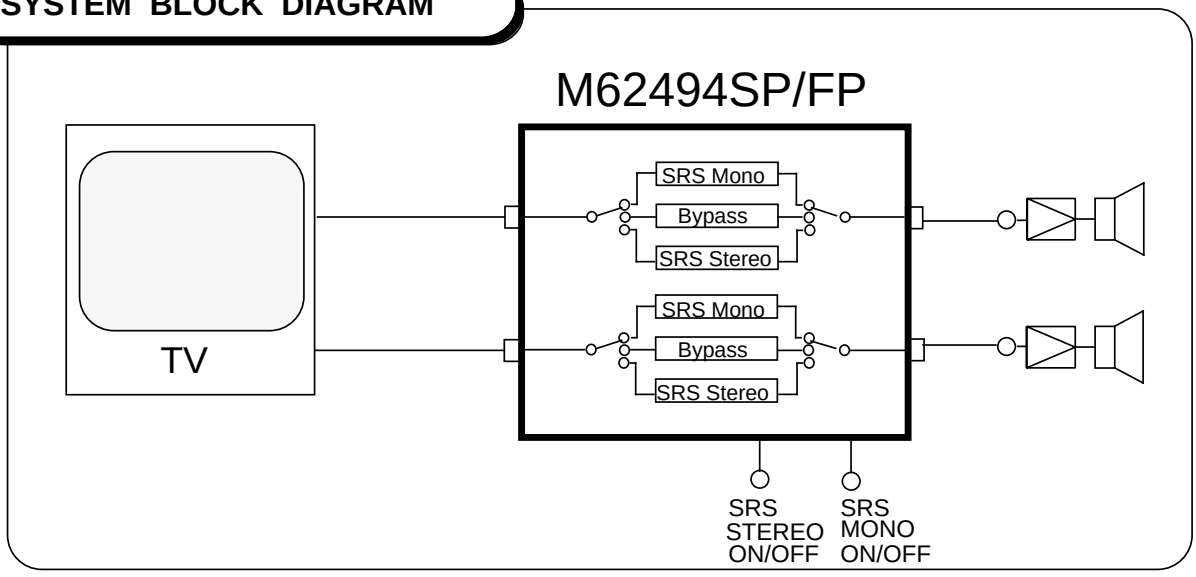


Block Diagram

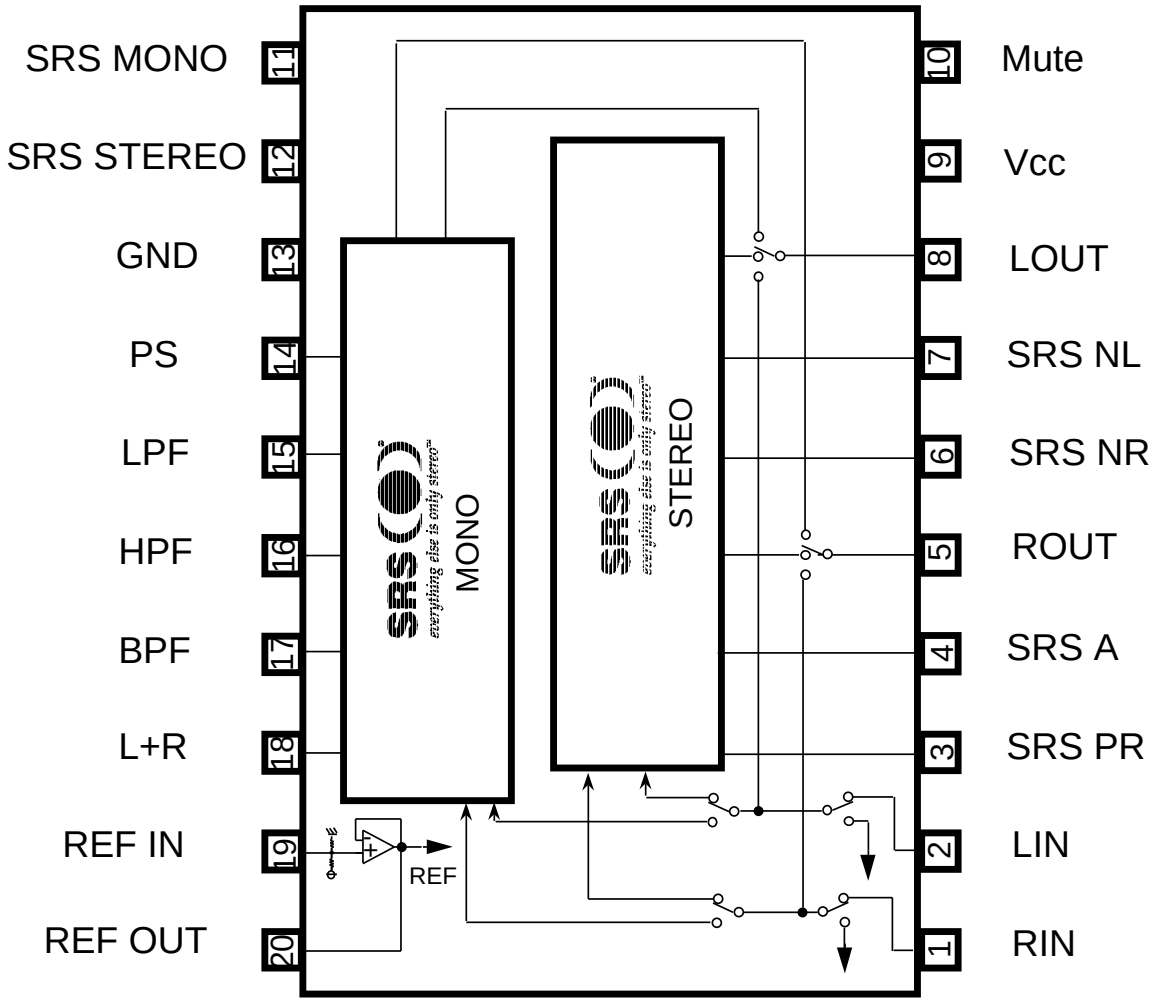

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Conditions	Ratings	Unit
Vcc	Supply Voltage		13.0	V
Pd	Power Dissipation	Ta≤25	750(SP)/550(FP)	mW
K_θ	Thermal Derating	Ta>25	7.5(SP)/5.5(FP)	mW/°C
Topr	Operating Temperature		-20 ~ 75	°C
Tstg	Storage Temperature		-40 ~ 125	°C

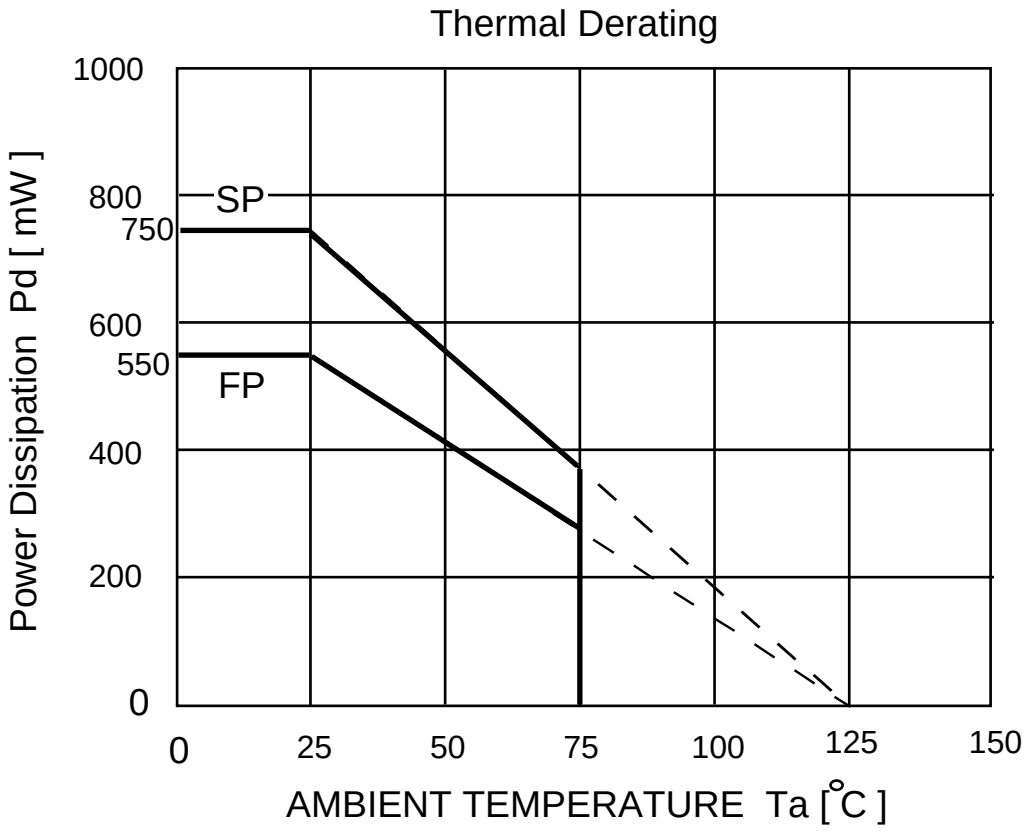

RECOMMENDED OPERATING CONDITION

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Vcc	Supply Voltage		4.5	9.0	12.0	V
V_{IH}	High Level Input Voltage	Pin-10,11,12	2.1	—	Vcc	V
V_{IL}	Low Level Input Voltage	Pin-10,11,12	0	—	0.8	V

ELECTRICAL CHARACTERISTICS

(1) Power Supply Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Icc	Circuit Current		—	16	35	mA

(2) -1 Input / Output Characteristics (Vcc=9V, Ta=25°C, Vi=500mVrms, pin 10=0V)

Symbol	Parameter	Conditions		Conditions	Limit			Unit
		Input	Output		Min.	Typ.	Max.	
Gv1	Input - Output Voltage Gain1	pin1,2 f=1kHz	pin5,8 RL=10KΩ	Bypass (pin11,12=0V)	-3	0	+3	dB
Gv2	Input - Output Voltage Gain2	pin1,2 f=1kHz	pin5,8 RL=10KΩ	SRS Stereo (pin12=5V/pin11=0V)	-0.5	+2.5	+5.5	dB
Gv3	Input - Output Voltage Gain3	pin1,2 f=100Hz	pin5,8 RL=10KΩ	SRS Stereo (pin12=5V/pin11=0V)	+7	+10	+13	dB
Gv4	Input - Output Voltage Gain4	pin1,2 f=100Hz	pin 8 RL=10KΩ	SRS Mono (pin12=0V/pin11=5V)	+4.5	+7.5	+10.5	dB
Gv5	Input - Output Voltage Gain5	pin1,2 f=10KHz	pin 8 RL=10KΩ	SRS Mono (pin12=0V/pin11=5V)	+2.5	+6	+9.5	dB
V_{OM}	Maximum Output Voltage	pin1,2 f=1kHz	pin5,8 THD=1% IHF-A filter RL=10KΩ	Bypass (pin11,12=0V)	1.8	2.2	—	Vrms
THD	Total Harmonic Distortion	pin1,2 f=1kHz Vi=0dBm	pin5,8 DIN-A filter RL=10KΩ	Bypass (pin11,12=0V)	—	0.01	0.05	%
MUTE	MUTE	pin1,2 f=1kHz Vi=0dBm	pin5,8 IHF-A filter RL=10KΩ	Mute (pin10=5V/pin11,12=0V)	—	55	45	dB

(Vcc=9V, Ta=25°C, pin 10=0V)

Symbol	Parameter	Conditions		Conditions	Limit			Unit
		Input	Output		Min.	Typ.	Max.	
V_{NO1}	Output Noise Voltage1		IHF-A filter	Bypass (pin11,12=0V)	—	3	10	µVrms
V_{NO2}	Output Noise Voltage2		IHF-A filter	SRS Stereo (pin12=5V/pin11=0V)	—	30	100	µVrms
V_{NO3}	Output Noise Voltage2		IHF-A filter	SRS Mono (pin12=0V/pin11=5V)	—	30	100	µVrms

Switch Condition and the Mode


⑩ Mute	Mute Switch
ON	H
OFF	L

⑪ SRS MONO	SRS MONO Switch
ON	H
OFF	L

⑫ SRS STEREO	SRS ON/OFF Switch
ON	H
OFF	L

* Bypass mode can be set by both SRS STEREO switch and SRS MONO switch are set to "L".

● SRS Stereo/Mono/Bypass Version

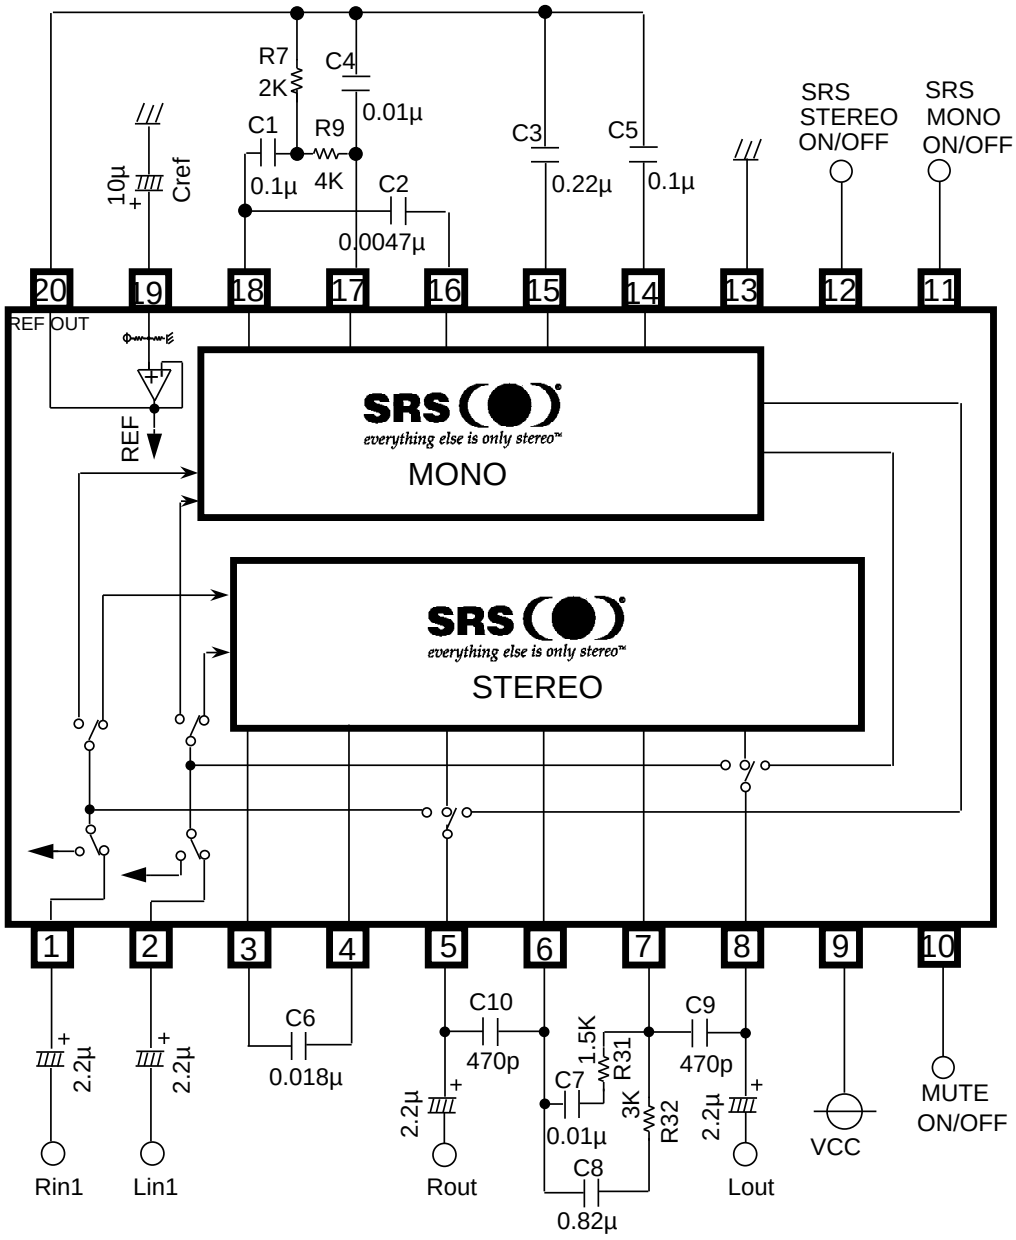

NOTE

Each switches (SRS ON/OFF, SRS MONO ON/OFF Switches) does not have the countermeasure for click noise, so that we recommend outside mute circuit.

SRS,the SRS logo,Sound Retrieval System and "everything else is only stereo" are registered trademarks of SRS Labs, Inc.
This device available only to licensees of SRS Lab,Inc.
Licensing and application information may be obtained from SRS Lab, Inc.
Mitsubishi Electric Corporation assumes no responsibility for any damage,or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts or circuit application examples contained in these materials.