





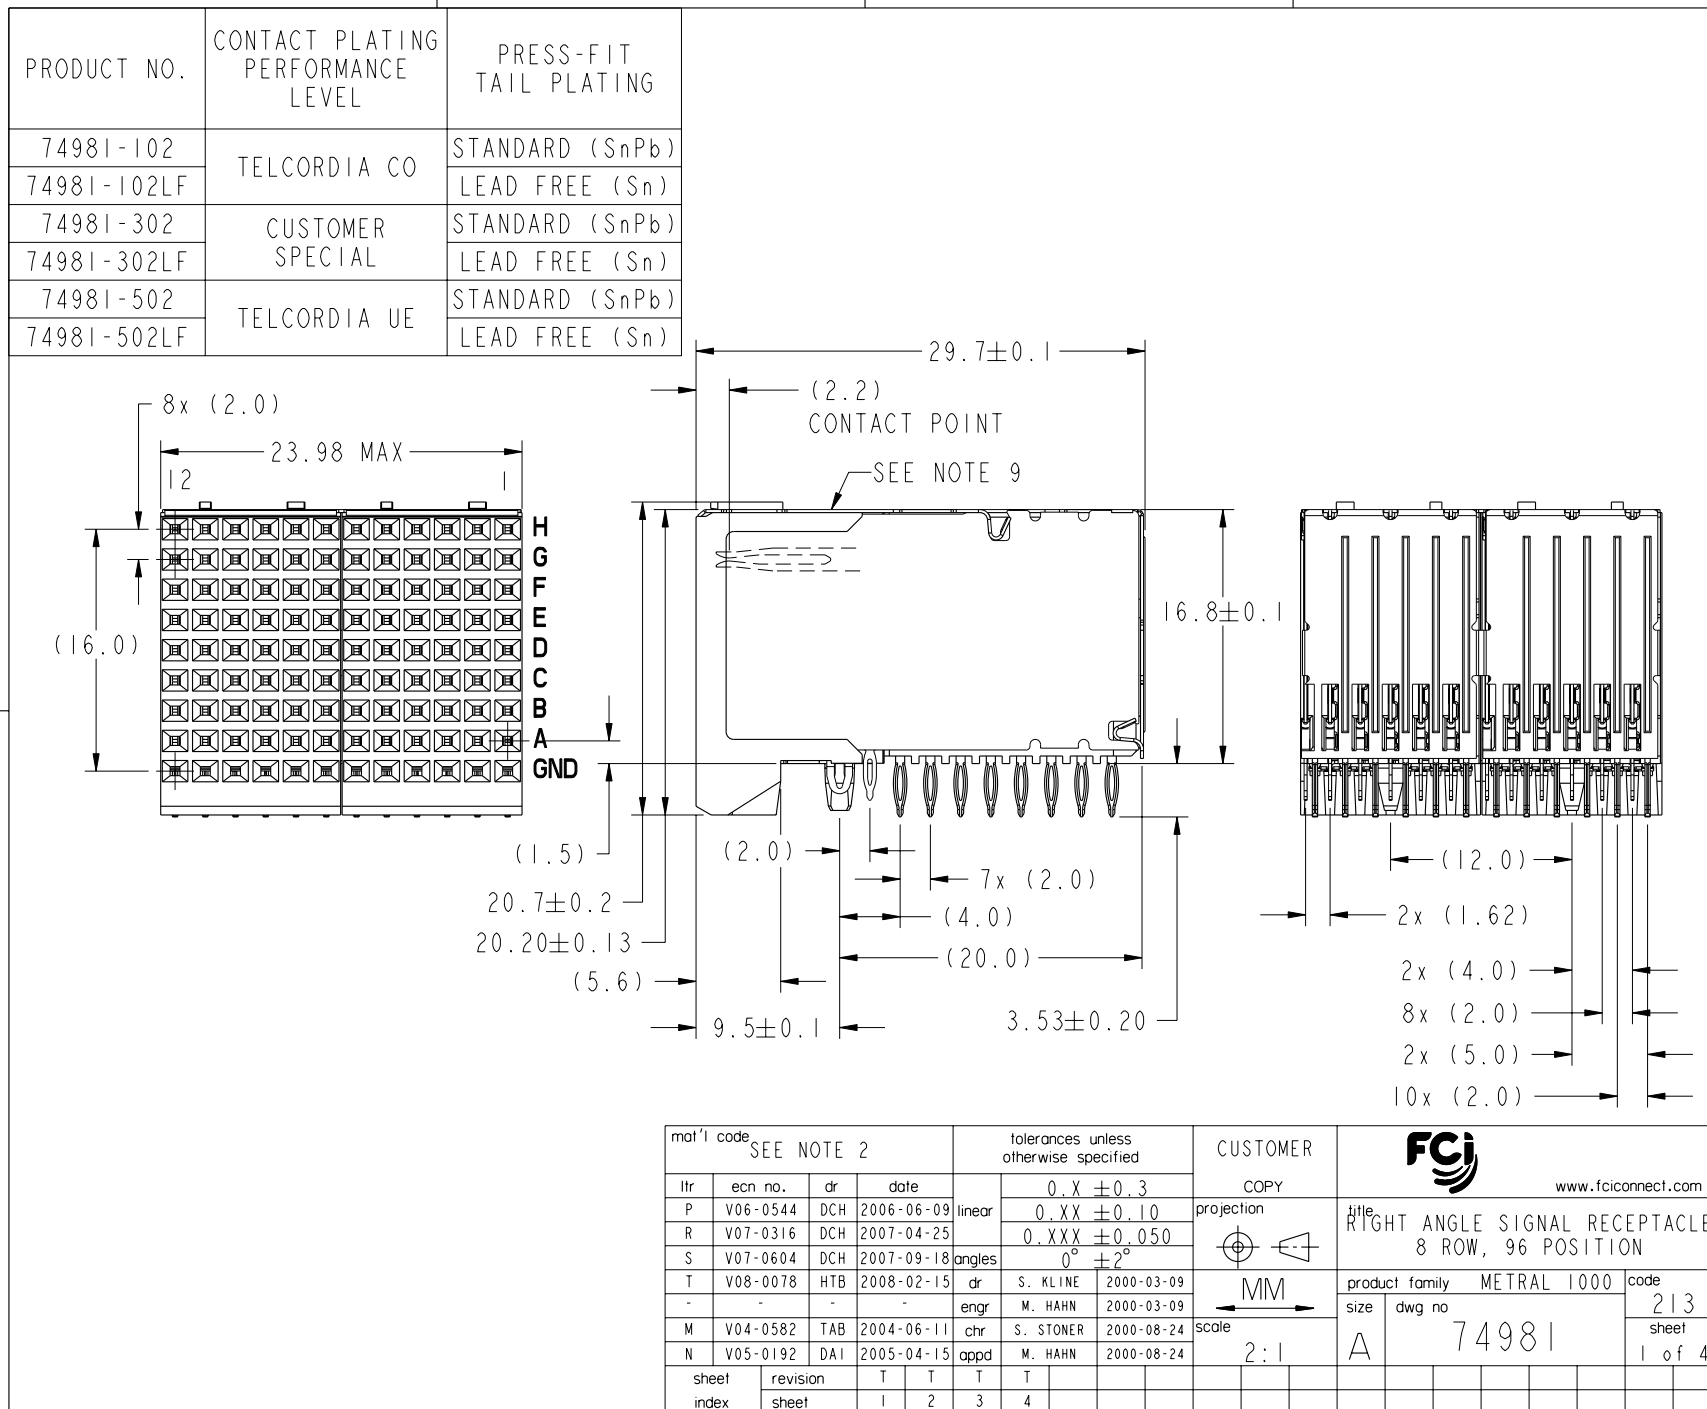

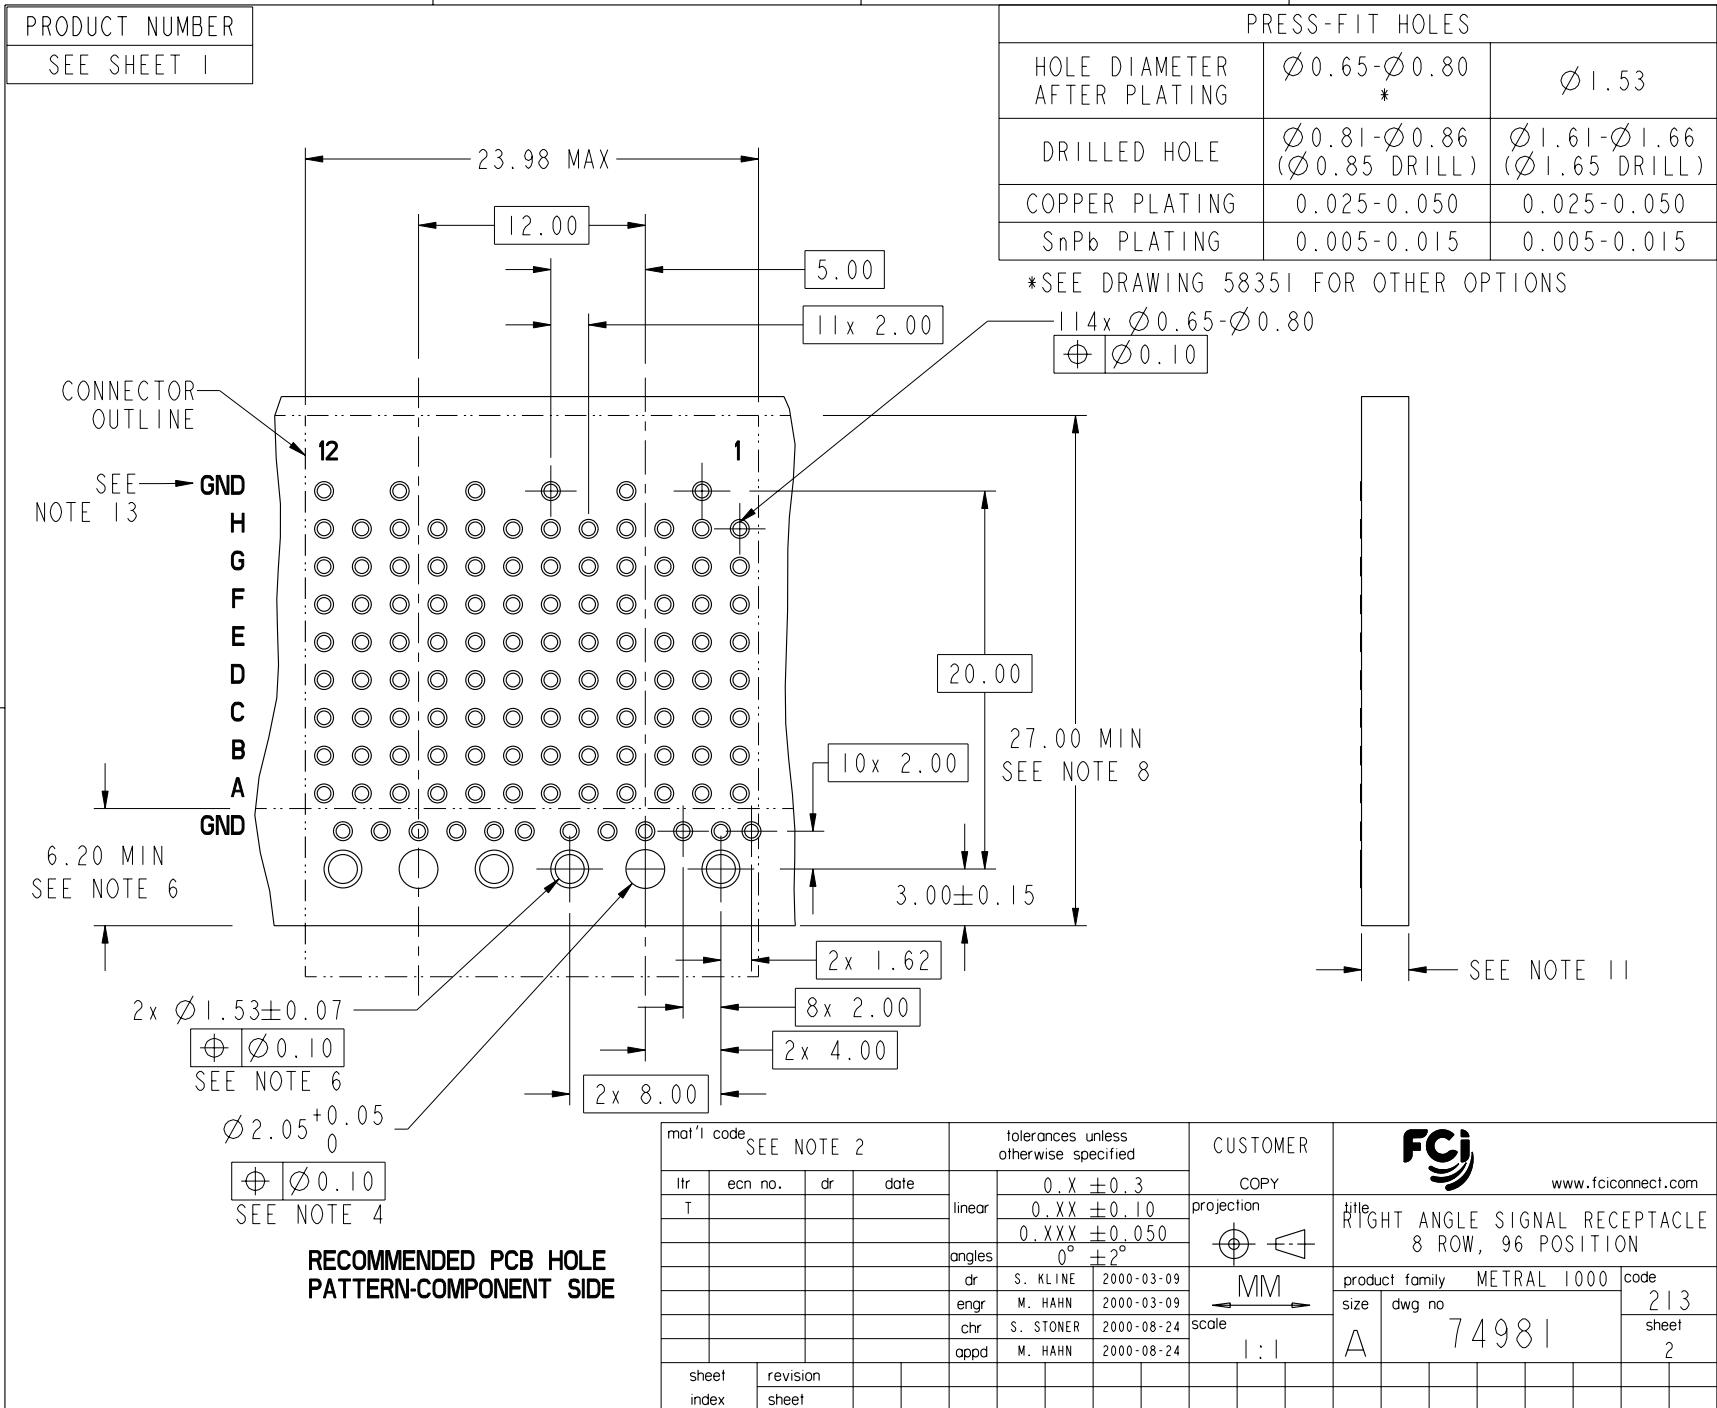

PRODUCT NUMBER
SEE SHEET 1



NOTES

1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994
2. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, GLASS FILLED FLAME RETARDANT PER UL94V-0
GROUND SHIELD MATERIAL: COPPER ALLOY
SIGNAL CONTACT MATERIAL: COPPER ALLOY
3. PLATING:
PRESS-FIT TAIL AREA: SnPb ON STANDARD
Sn ON LEAD FREE
MATING CONTACT POINTS: MEETS PERFORMANCE LEVEL SHOWN IN TABLE ON SHEET 1.
4. Ø2.05 HOLE IS UNPLATED.
5. Ø1.53 PLATED HOLES (2X) ARE FOR GROUNDS.
6. AVOID TRACES IN THIS AREA ON TOP OF PCB DUE TO EXPOSED GROUND SHIELD.
7. UNDERPLATING FOR SHIELD AND SIGNAL CONTACTS IS 1.3 µm Ni MIN.
8. COMPONENT KEEP OUT ZONE FOR PRESS BLOCK CLEARANCE.
9. PRODUCT MARKING: DATE AND LOT CODE.
10. SEE GS-20-018 FOR APPLICATION OF CONNECTOR TO PCB.
11. PCB THICKNESS RANGE: 1.3mm TO 3.4mm.
12. SEE PRODUCT SPECIFICATION GS-12-134 FOR PRODUCT PERFORMANCE CHARACTERISTICS.

13. THIS GROUND ROW OF VIA-HOLES ONLY REQUIRED FOR PREVIOUS REVISIONS OF THIS DESIGN WHERE THE TOP SHIELDS HAD EON PRESS-FIT. DUE TO INVENTORIES OF PREVIOUS VERSION, WE RECOMMEND THEY BE DESIGNED IN.

14. PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.

mat'l code SEE NOTE 2				tolerances unless otherwise specified			CUSTOMER		 www.fciconnect.com				
ltr	ecr no.	dr	date	linear	0.X ±0.3			COPY					
T					0.XX ±0.10			projection					
					0.XXX ±0.050								
				angles	0° ±2°								
				dr	S. KLINE	2000-03-09			product family			code	
				enrg	M. HAHN	2000-03-09			METRAL 1000			213	
				chr	S. STONER	2000-08-24			size			sheet	
				appd	M. HAHN	2000-08-24	scale		A			3	
sheet index		revision sheet											

cage code 22526

Pro/E

3

4


PDM: Rev:T

STATUS: Released


Printed: May 13, 2011

PRODUCT NUMBER
SEE SHEET 1

DISTANCE FROM CONTACT POINT TO BOARD	
CONTACT	DISTANCE
A	12.5
B	15.9
C	18.9
D	21.9
E	25.0
F	28.0
G	31.1
H	34.1

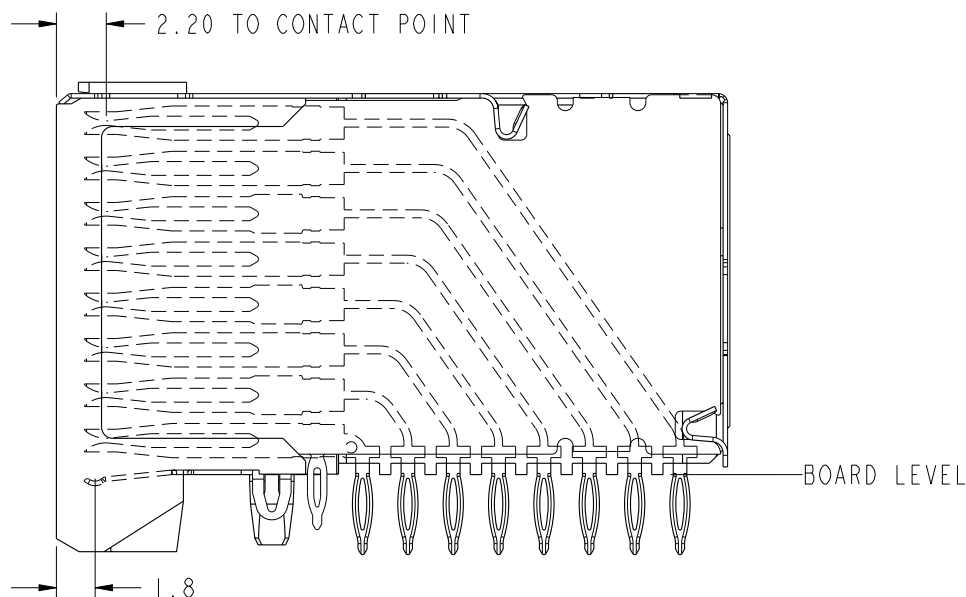

CONTACT POINT AND SKEW

mat'l code SEE NOTE 2				tolerances unless otherwise specified			CUSTOMER		FCi www.fciconnect.com		
ltr	ecr no.	dr	date	linear	0.X ± 0.3		projection 	title RIGHT ANGLE SIGNAL RECEPTACLE 8 ROW, 96 POSITION			
T					0.XX ± 0.10						
				angles	0.XXX ± 0.050		 MM scale 3:1	product family		METRAL 1000	code
					0° $\pm 2^\circ$			size	dwg no	74981	213
				dr	S. KLINE	2000-03-09		sheet	4		
				enrg	M. HAHN	2000-03-09					
				chr	S. STONER	2000-08-24					
				appd	M. HAHN	2000-08-24					
sheet index	revision sheet										

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.