
The RF Line

110-Channel (750 MHz) CATV Line Extender Amplifier

MHW7272A

- 24 V Supply Voltage
- Specified for 110–Channel Performance
- Typical Noise Figure
  NF = 5.5 dB @ 750 MHz
- All Gold Metallization
- Improved CTB Performance over Previous Versions

27 dB GAIN
750 MHz
110–CHANNEL
CATV AMPLIFIER



CASE 714Y–03, STYLE 1

MAXIMUM RATINGS


Rating	Symbol	Value	Unit
RF Voltage Input (Single Tone)	V_{in}	+55	dBmV
DC Supply Voltage	V_{CC}	+28	Vdc
Operating Case Temperature Range	T_C	–20 to +100	°C
Storage Temperature Range	T_{stg}	–40 to +100	°C

ELECTRICAL CHARACTERISTICS (V_{CC} = 24 Vdc, T_C = +30°C, 75 Ω system unless otherwise noted)

Characteristic		Symbol	Min	Typ	Max	Unit
Frequency Range		BW	40	—	750	MHz
Power Gain	50 MHz 750 MHz	G_p	26.2 27	27.2 27.7	27.8 29	dB
Slope	40–750 MHz	S	0	0.7	1.5	dB
Gain Flatness (40–750 MHz, Peak to Valley)		—	—	0.4	0.8	dB
Return Loss — Input/Output (Z_0 = 75 Ohms)	@ 40 MHz @ f > 40 MHz (Derate)	IRL/ORL	20 —	— —	— 0.007	dB dB/MHz
Composite Second Order (V_{out} = +40 dBmV/ch., Worst Case)	110–Channel FLAT	CSO_{110}	—	–70	–64	dBc
Cross Modulation Distortion @ Ch 2 (V_{out} = +40 dBmV/ch., FM = 55 MHz)	110–Channel FLAT	XMD_{110}	—	–63	–60	dBc
Composite Triple Beat (V_{out} = +40 dBmV/ch., Worst Case)	110–Channel FLAT	CTB_{110}	—	–68	–64	dBc
Noise Figure	50 MHz 750 MHz	NF	— —	— 5.5	5.5 6.5	dB
DC Current (V_{DC} = 24 V, T_C = 30°C)		I_{DC}	280	310	350	mA

© Motorola, Inc. 1997

PACKAGE DIMENSIONS

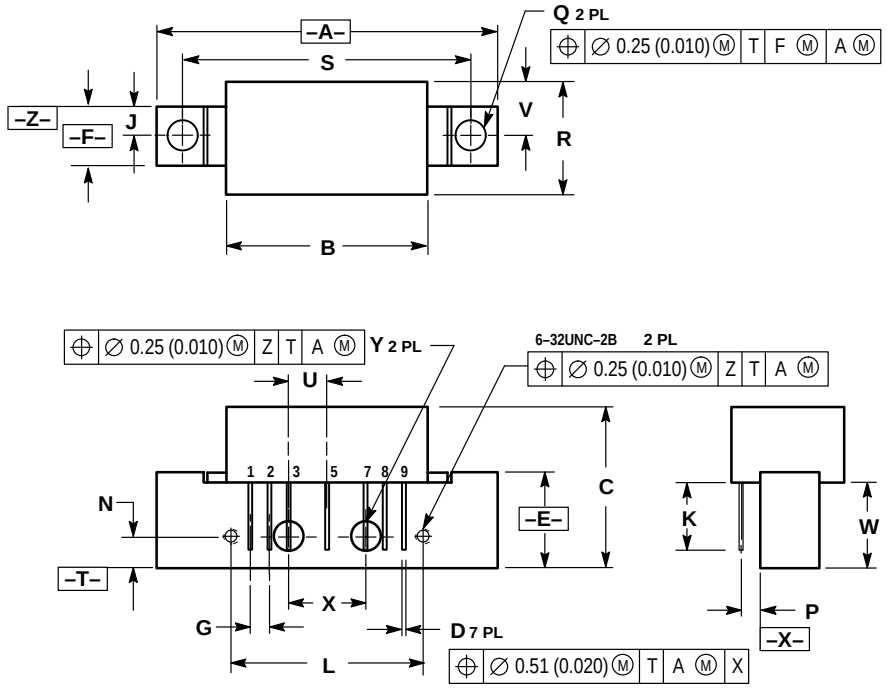

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	——	1.775	——	45.08
B	——	1.085	——	27.56
C	——	0.840	——	21.34
D	0.018	0.022	0.46	0.56
E	0.465	0.510	11.81	12.95
F	0.300	0.325	7.62	8.25
G	0.100 BSC		2.54 BSC	
J	0.156 BSC		3.96 BSC	
K	0.315	0.355	8.00	8.50
L	1.00 BSC		25.40 BSC	
N	0.165 BSC		4.19 BSC	
P	0.100 BSC		2.54 BSC	
Q	0.148	0.168	3.76	4.27
R	——	0.600	——	15.24
S	1.500 BSC		38.10 BSC	
U	0.200 BSC		5.08 BSC	
V	——	0.250	——	6.35
W	0.435	0.450	11.05	11.43
X	0.400 BSC		10.16 BSC	
Y	0.152	0.163	3.85	4.15

STYLE 1:
PIN 1. RF INPUT
2. GROUND
3. GROUND
4. DELETED
5. VDC
6. DELETED
7. GROUND
8. GROUND
9. RF OUTPUT

CASE 714Y–03
ISSUE D

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals” must be validated for each customer application by customer’s technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and Ⓜ are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

Mfax is a trademark of Motorola, Inc.

How to reach us:
USA / EUROPE / Locations Not Listed: Motorola Literature Distribution;
P.O. Box 5405, Denver, Colorado 80217. 1–303–675–2140 or 1–800–441–2447

JAPAN: Nippon Motorola Ltd.: SPD, Strategic Planning Office, 141,
4–32–1 Nishi–Gotanda, Shagawa–ku, Tokyo, Japan. 03–5487–8488

Customer Focus Center: 1–800–521–6274

Mfax™: RMFAX0@email.sps.mot.com – TOUCHTONE 1–602–244–6609
Motorola Fax Back System – US & Canada ONLY 1–800–774–1848
– http://sps.motorola.com/mfax/

ASIA / PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

HOME PAGE: http://motorola.com/sps/