


LINE FILTER INDUCTORS

Bel offers a series of line inductors designed to assist in eliminating or reducing noise transmission in AC or DC circuit applications. For example, these noise suppression chokes are superior output inductors when used in a switch mode power supply. Our inductors are packaged in a compact, rigid vertical case with "set" terminal pins to simplify mounting on computer boards in microcomputer applications.

- * Excellent Linear Magnetic Characteristics.
- * Operating Temperature Range 0°C to 70°C.
- * A Toroid core to maintain reduced flux leakage.
- * Excellent vibration resistance.


MECHANICALS

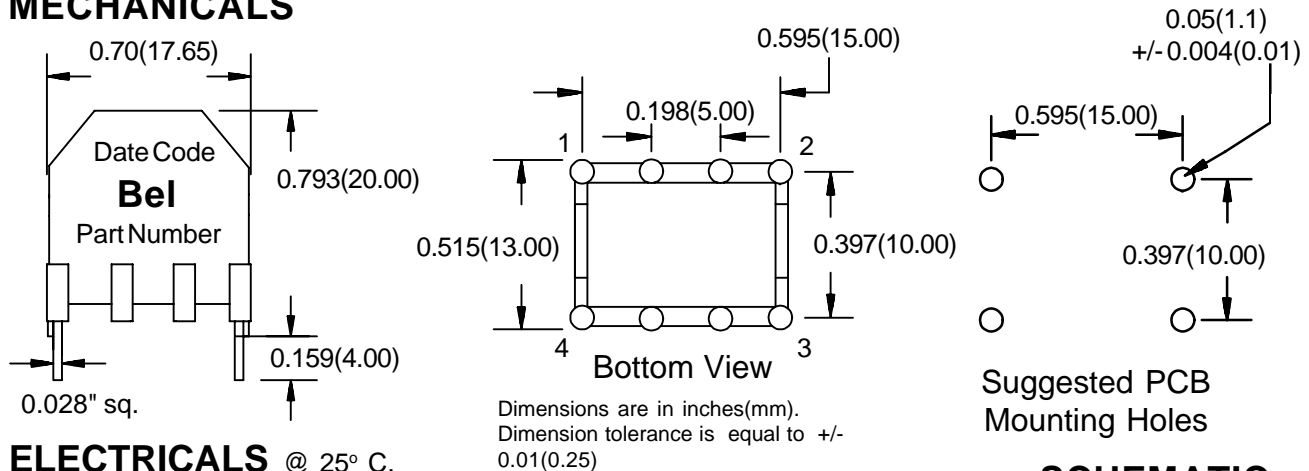

ELECTRICALS @ 25° C.

Part Number	Inductance (uH) +/- 15%	Rated DC Current (amperes)	% Of Initial Inductance At Rated Current Typ	DCR (milliohms) Max
0570-2004-01	10	2.0	93	35
0570-2004-02	20	1.5	93	70
0570-2004-03	30	1.0	93	100
0570-2004-04	50	0.75	95	200
0570-2004-05	75	0.60	87	200
0570-2004-06	100	0.50	85	210
0570-2004-07	150	0.50	88	300

SCHEMATIC



Corporate Office
Bel Fuse Inc.
 198 Van Vorst Street, Jersey City, NJ 07302-4496
 Tel: 201-432-0463
 Fax: 201-432-9542
 E-Mail: BelFuse@belfuse.com
 Internet: http://www.belfuse.com

Far East Office
Bel Fuse Ltd.
 8F/8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel: 852-2328-5515
 Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Preston PR1 8UD
 Lancashire, U.K.
 Tel: 44-1772-556601
 Fax: 44-1772-888366