National Semiconductor

May 1995

54F/74F534
Octal D-Type Flip-Flop with TRI-STATE® Outputs

General Description

The ’F534 is a high speed, low-power octal D-type flip-flop featuring separate D-type inputs for each flip-flop and TRI-STATE outputs for bus-oriented applications. A buffered Clock (CP) and Output Enable ($\overline{OE}$) are common to all flip-flops. The ’F534 is the same as the ’F374 except that the outputs are inverted.

Features


- Edge-triggered D-type inputs
- Buffered positive edge-triggered clock
- TRI-STATE outputs for bus-oriented applications
- Guaranteed 4000V minimum ESD protection

Commercial	Military	Package Number	Package Description
74F534PC		N20A	20-Lead (0.300″ Wide) Molded Dual-In-Line
	54F534DM (Note 2)	J20A	20-Lead Ceramic Dual-In-Line
74F534SC (Note 1)		M20B	20-Lead (0.300″ Wide) Molded Small Outline, JEDEC
74F534SJ (Note 1)		M20D	20-Lead (0.300″ Wide) Molded Small Outline, EIAJ
	54F534FM (Note 2)	W20A	20-Lead Cerpack
	54F534LM (Note 2)	E20A	20-Lead Ceramic Leadless Chip Carrier, Type C


Note 1: Devices also available in 13″ reel. Use suffix = SCX, and SJX

Note 2: Military grade device with environmental and burn-in processing. Use suffix = DMQB, FMQB and LMQB

Logic Symbols



TL/F/9549–1

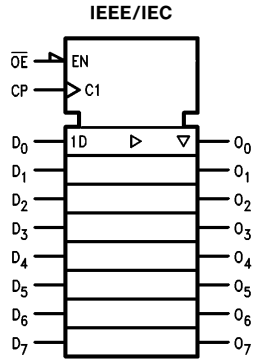

TL/F/9549–5

Unit Loading/Fan Out


Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I_{IH}/I_{IL} Output I_{OH}/I_{OL}
D_0–D_7	Data Inputs	1.0/1.0	20 μA/−0.6 mA
CP	Clock Pulse Input (Active Rising Edge)	1.0/1.0	20 μA/−0.6 mA
$\overline{OE}$	TRI-STATE Output Enable Input (Active LOW)	1.0/1.0	20 μA/−0.6 mA
$\overline{O}_0$–$\overline{O}_7$	Complementary TRI-STATE Outputs	150/40(33.3)	−3 mA/24 mA (20 mA)

TRI-STATE® is a registered trademark of National Semiconductor Corporation.

©1995 National Semiconductor Corporation


Connection Diagrams

Pin Assignment for DIP, SOIC and Flatpak



TL/F/9549–2

Pin Assignment for LCC



TL/F/9549–3

Functional Description


The 'F534 consists of eight edge-triggered flip-flops with individual D-type inputs and TRI-STATE complementary outputs. The buffered clock and buffered Output Enable are common to all flip-flops. The eight flip-flops will store the state of their individual D inputs that meet the setup and hold times requirements on the LOW-to-HIGH clock (CP) transition. With the Output Enable ($\overline{OE}$) LOW, the contents of the eight flip-flops are available at the outputs. When the $\overline{OE}$ is HIGH, the outputs go to the high impedance state. Operation of the $\overline{OE}$ input does not affect the state of the flip-flops.

Function Table

Inputs			Output
CP	**OE**	**D**	$\overline{\mathbf{O}}$
⌐‾	L	H	L
⌐‾	L	L	H
L	L	X	$\overline{O}_0$
X	H	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
⌐‾ = LOW-to-HIGH Clock Transition
Z = High Impedance
$\overline{O}_0$ = Value stored from previous clock cycle

Logic Diagram

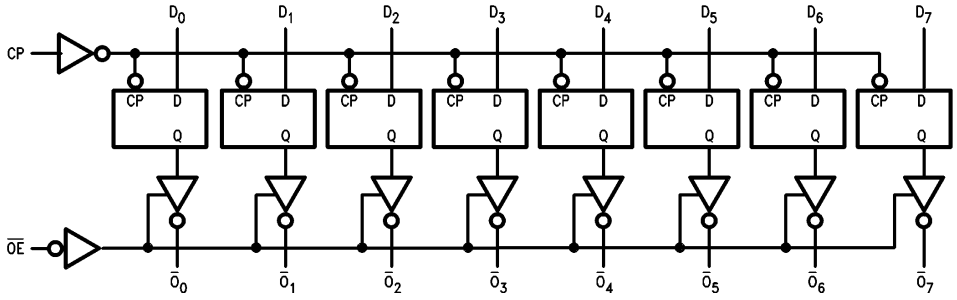

TL/F/9549–4

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	−65°C to +150°C
Ambient Temperature under Bias	−55°C to +125°C
Junction Temperature under Bias	−55°C to +175°C
Plastic	−55°C to +150°C
V_{CC} Pin Potential to Ground Pin	−0.5V to +7.0V
Input Voltage (Note 2)	−0.5V to +7.0V
Input Current (Note 2)	−30 mA to +5.0 mA
Voltage Applied to Output in HIGH State (with V_{CC} = 0V)	
Standard Output	−0.5V to V_{CC}
TRI-STATE Output	−0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I_{OL} (mA)
ESD Last Passing Voltage (Min)	4000V

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	−55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter		54F/74F Min	54F/74F Typ	54F/74F Max	Units	V_{CC}	Conditions
V_{IH}	Input HIGH Voltage		2.0			V		Recognized as a HIGH Signal
V_{IL}	Input LOW Voltage				0.8	V		Recognized as a LOW Signal
V_{CD}	Input Clamp Diode Voltage				−1.2	V	Min	I_{IN} = −18 mA
V_{OH}	Output HIGH Voltage	54F 10% V_{CC}	2.5			V	Min	I_{OH} = −1 mA
		54F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 10% V_{CC}	2.5					I_{OH} = −1 mA
		74F 10% V_{CC}	2.4					I_{OH} = −3 mA
		74F 5% V_{CC}	2.7					I_{OH} = −1 mA
		74F 5% V_{CC}	2.7					I_{OH} = −3 mA
V_{OL}	Output LOW Voltage	54F 10% V_{CC}			0.5	V	Min	I_{OL} = 20 mA
		74F 10% V_{CC}			0.5			I_{OL} = 24 mA
I_{IH}	Input HIGH Current	54F			20.0	μA	Max	V_{IN} = 2.7V
		74F			5.0			
I_{BVI}	Input HIGH Current Breakdown Test	54F			100	μA	Max	V_{IN} = 7.0V
		74F			7.0			
I_{CEX}	Output HIGH Leakage Current	54F			250	μA	Max	V_{OUT} = V_{CC}
		74F			50			
V_{ID}	Input Leakage Test	74F	4.75			V	0.0	I_{ID} = 1.9 μA All Other Pins Grounded
I_{OD}	Output Leakage Circuit Current	74F			3.75	μA	0.0	V_{IOD} = 1.50 μA All Other Pins Grounded
I_{IL}	Input LOW Current				−0.6	mA	Max	V_{IN} = 0.5V
I_{OZH}	Output Leakage Current				50	μA	Max	V_{OUT} = 2.7V
I_{OZL}	Output Leakage Current				−50	μA	Max	V_{OUT} = 0.5V
I_{OS}	Output Short-Circuit Current		−60		−150	mA	Max	V_{OUT} = 0V
I_{ZZ}	Bus Drainage Test				500	μA	0.0V	V_{OUT} = 5.25V
I_{CCZ}	Power Supply Current			55	86	mA	Max	V_O = HIGH Z

AC Electrical Characteristics


Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$ $C_L = 50$ pF			54F $T_A, V_{CC} =$ Mil $C_L = 50$ pF		74F $T_A, V_{CC} =$ Com $C_L = 50$ pF		Units
		Min	Typ	Max	Min	Max	Min	Max	
f_{max}	Maximum Clock Frequency	100			60		70		MHz
t_{PLH}	Propagation Delay	4.0	6.5	8.5	4.0	10.5	4.0	10.0	ns
t_{PHL}	CP to $\overline{O}_n$	4.0	6.5	8.5	4.0	11.0	4.0	10.0	
t_{PZH}	Output Enable Time	2.0	9.0	11.5	2.0	14.0	2.0	12.5	ns
t_{PZL}		2.0	5.8	7.5	2.0	10.0	2.0	8.5	
t_{PHZ}	Output Disable Time	1.5	5.3	7.0	1.5	8.0	1.5	8.0	ns
t_{PLZ}		1.5	4.3	5.5	1.5	7.5	1.5	6.5	

AC Operating Requirements


Symbol	Parameter	74F $T_A = +25°C$ $V_{CC} = +5.0V$		54F $T_A, V_{CC} =$ Mil		74F $T_A, V_{CC} =$ Com		Units
		Min	Max	Min	Max	Min	Max	
$t_s(H)$	Setup Time, HIGH or LOW	2.0		2.0		2.0		ns
$t_s(L)$	D_n to CP	2.0		2.5		2.0		
$t_h(H)$	Hold Time, HIGH or LOW	2.0		2.0		2.0		
$t_h(L)$	D_n to CP	2.0		2.5		2.0		
$t_w(H)$	CP Pulse Width	7.0		7.0		7.0		ns
$t_w(L)$	HIGH or LOW	6.0		6.0		6.0		

Ordering Information


The device number is used to form part of a simplified purchasing code where the package type and temperature range are defined as follows:

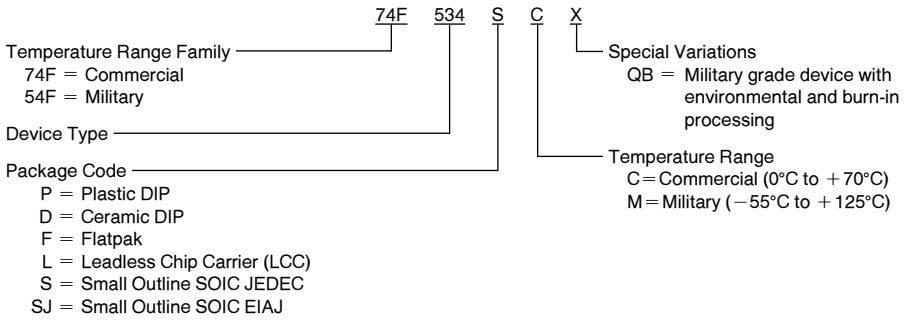

Physical Dimensions inches (millimeters)

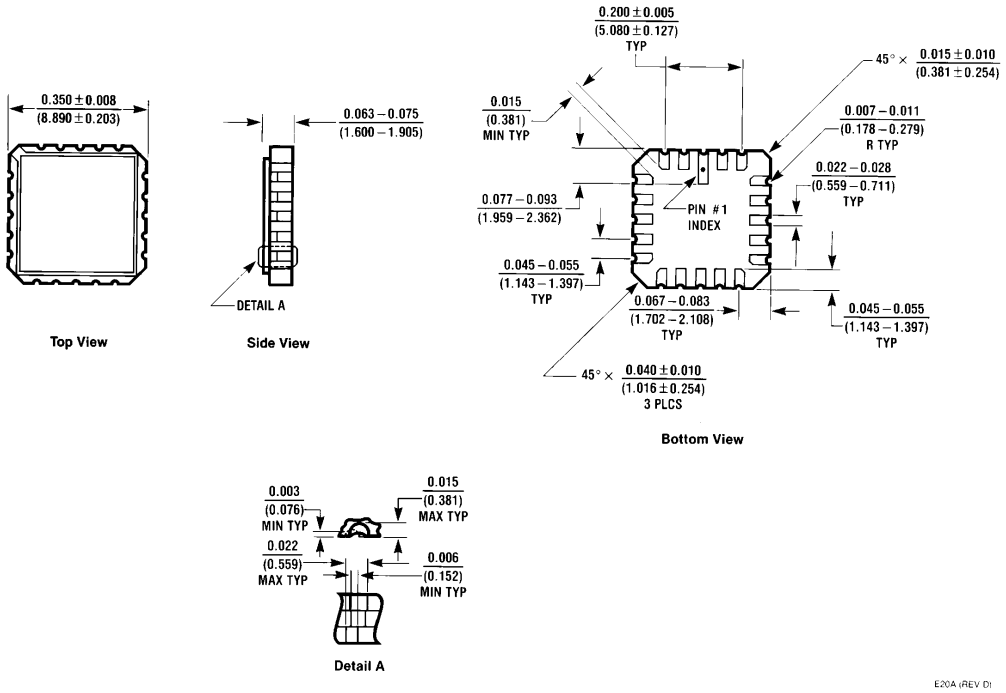


20-Lead Ceramic Leadless Chip Carrier (L)
NS Package Number E20A

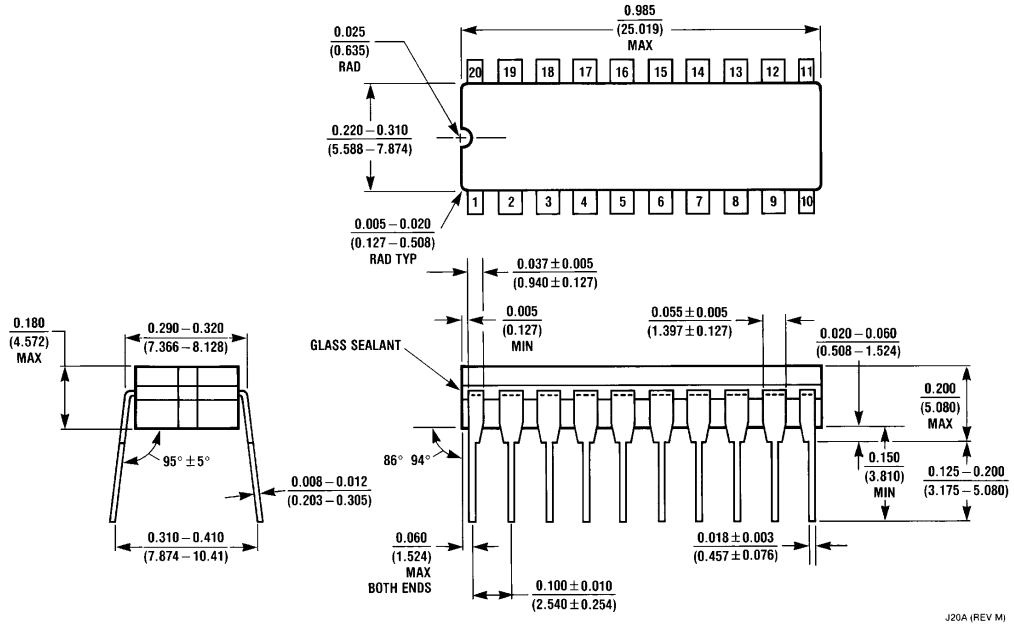


20-Lead Ceramic Dual-In-Line Package (D)
NS Package Number J20A

Physical Dimensions inches (millimeters) (Continued)

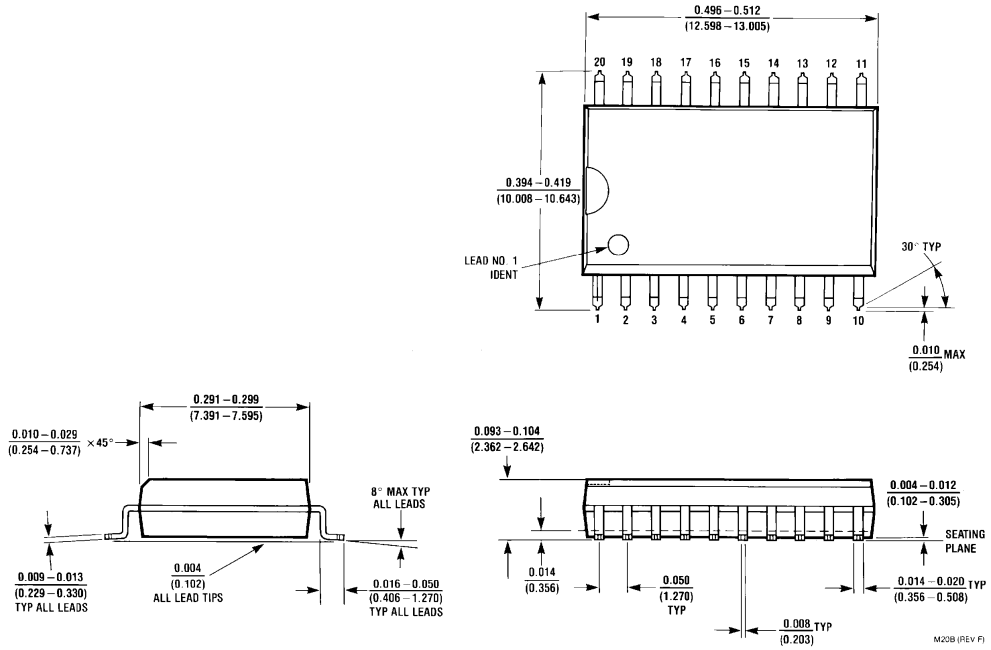


20-Lead (0.300″ Wide) Molded Small Outline Package, JEDEC
NS Package Number M20B

Physical Dimensions inches (millimeters) (Continued)

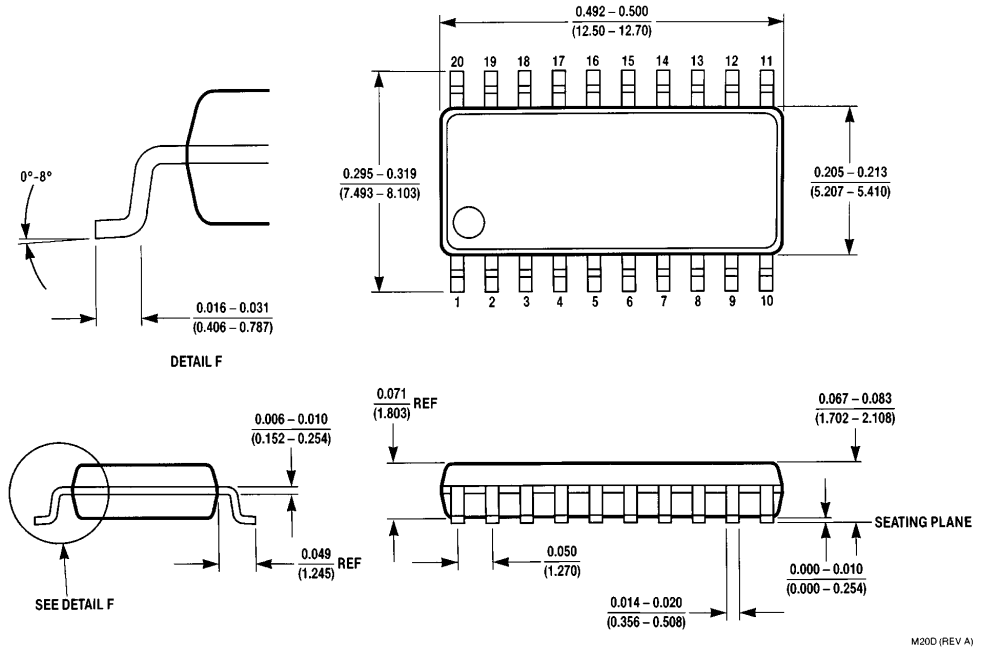


20-Lead (0.300″ Wide) Molded Small Outline Package, EIAJ (SJ)
NS Package Number M20D

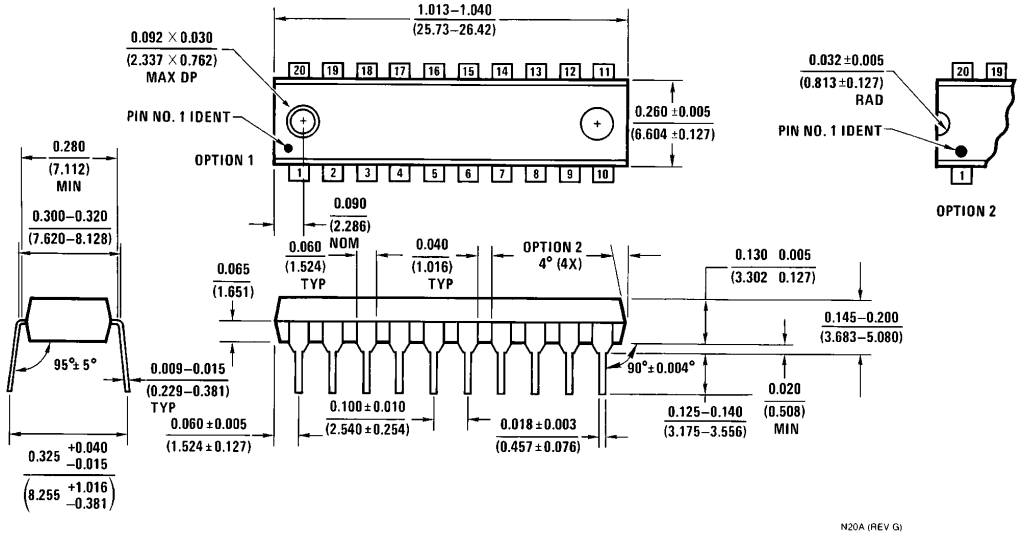

20-Lead (0.300″ Wide) Molded Dual-In-Line Package (P)
NS Package Number N20A

Physical Dimensions inches (millimeters) (Continued)

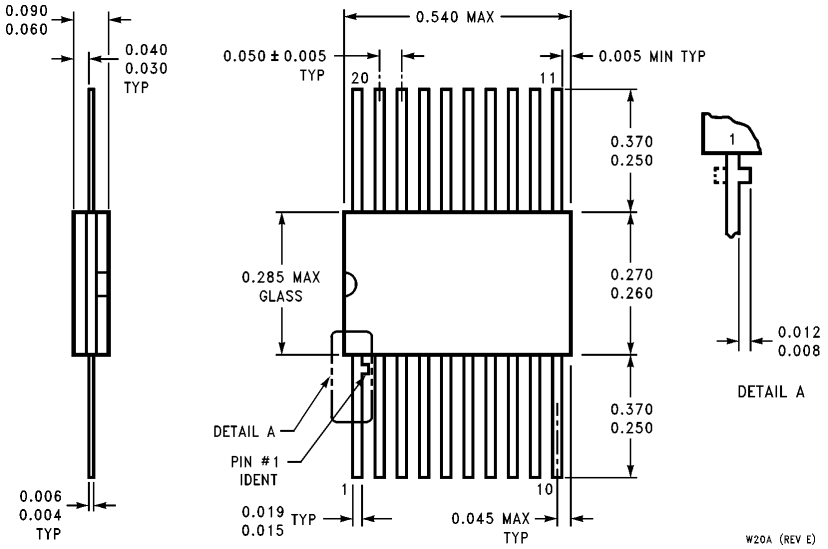

20-Lead Ceramic Flatpak (F)
NS Package Number W20A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
2900 Semiconductor Drive
P.O. Box 58090
Santa Clara, CA 95052-8090
Tel: 1(800) 272-9959
TWX: (910) 339-9240

National Semiconductor GmbH
Livry-Gargan-Str. 10
D-82256 Fürstenfeldbruck
Germany
Tel: (81-41) 35-0
Telex: 527649
Fax: (81-41) 35-1

National Semiconductor Japan Ltd.
Sumitomo Chemical
Engineering Center
Bldg. 7F
1-7-1, Nakase, Mihama-Ku
Chiba-City,
Ciba Prefecture 261
Tel: (043) 299-2300
Fax: (043) 299-2500

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductores Do Brazil Ltda.
Rue Deputado Lacorda Franco
120-3A
Sao Paulo-SP
Brazil 05418-000
Tel: (55-11) 212-5066
Telex: 391-1131931 NSBR BR
Fax: (55-11) 212-1181

National Semiconductor (Australia) Pty, Ltd.
Building 16
Business Park Drive
Monash Business Park
Nottinghill, Melbourne
Victoria 3168 Australia
Tel: (3) 558-9999
Fax: (3) 558-9998

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.